



Committed to your success!®



Jarvis Customer Service

800-995-9876

JARVIS CUSTOMER SERVICE

**905-673-9500
CAN-AM CASTERS**

**800-995-9876
JARVIS USA**

**800-995-9876
JARVIS MEXICO**

**Ext.
204**

**Ext.
204**

**Ext.
214**

**Ext.
208**

**Ext.
204**

**Ext.
214**

**Ext.
214**

**Ext.
201**

**Ext.
201**



Contents

Jarvis Limited Warranty Policy

Jarvis caster products are warranted against defects in material and workmanship for a period of one (1) year from the date of original purchase. Any product found to be defective by Jarvis Caster Company due to material or workmanship, returned with the prior written authorization of Jarvis' Quality Control Department, within the warranty period, will be repaired or replaced free of charge, non-inclusive of freight and installation.

This Limited Warranty does not include any product that has not been used for the purpose intended, or any product that has been abused, misused, mishandled, altered, or improperly installed. Jarvis Caster's obligation under this Limited Warranty is limited to repair, replacement, or refund of the purchase price at the sole discretion of Jarvis Caster.

This Limited Warranty is provided in lieu of all other warranties, express or implied, and all other warranties of merchantability and fitness for a particular purpose, are hereby excluded and disclaimed.

RoHS Compliant

Jarvis standard zinc plated casters comply with RoHS regulations set forth by the European Union.



Select Jarvis casters are listed by NSF International

ICWM

Institute of Caster and Wheel Manufacturers



Table of Contents

Jarvis Customer Service	2
Contents	3
Jarvis Capability	4-7
Jarvis Model Numbers	8
Caster Terms	9
Installation Tips.....	9
How to Select the Correct Caster / Wheel ..	10
Safety & Maintenance Information	11
Wheel Selection	12-13
Wheel Selection Guide	14
Bearings	15
Finishes	15
NEW Special Caster Designs	16-17

Light Duty / Business Machine Casters

L2-L9 Series	18
291 Series General Duty	19
Business Machine Dual Wheel	20
Business Machine Single Wheel.....	21-23

13-28 Series Casters

13 Series Threaded Stem.....	24
14 Series Spring Stem	25
17 Series Pipe Thread Stem.....	26
19 Series Octagon Stem	27
25 Series Swivel & Rigid Top Plate.....	28
27 Series Expanding Adapter Stem	29
28 Series Hollow Kingpin	30

NEW W13-W28 Series Casters

W13 Series Threaded Stem.....	31
W14 Series Spring Stem	32
W17 Series Pipe Thread Stem.....	33
W19 Series Octagon Stem	34
W25 Series Swivel & Rigid Top Plate.....	35
W27 Series Expanding Adapter Stem	36
W28 Series Hollow Kingpin	37

30-40 Series Casters

30 Series Swivel & Rigid Top Plate	38-39
32 Series Octagon Stem	40-41
34 Series Spring Ring Stem	42-43
36 Series Threaded Stem.....	44-45
3S Series Hollow Kingpin	46-47
38 Series Pipe Thread Stem.....	48-49
40 Series Expanding Adapter Stem	50-51

50-50N Series Casters

50 Series Total Lock / Swivel Lock	52
54 Series Total Lock / Swivel Lock	53
Round / Square Stems	
56 Series Total Lock / Swivel Lock	54
Threaded Stems	
50N Series Swivel Top Plate /	
Total Lock / Swivel Lock.....	55

Plastic Casters

50MG Futura.....	56-57
50HN Infinity.....	58

Medium Heavy Duty Casters

130 Series Swivel & Rigid Top Plate	59
134 Series Spring Ring Stem	60
136 Threaded Stem	61

Heavy Duty Casters

61 Series Swivel & Rigid Top Plate	62-63
NEW 71 Series Swivel & Rigid Top Plate	64-65
81 Series Swivel & Rigid Top Plate	66-67
81SB Series Kingpinless	68
NEW Pneumatics Swivel & Rigid Top Plate.....	69

Stainless Steel Casters

S30 Swivel & Rigid Top Plate	70
S32 Round Stem.....	71
S34 Spring Ring Stem.....	72
S36 Threaded Stem	73
S40 Expanding Adapter Stem.....	74
S81 Swivel & Rigid Top Plate	75

Caster Wheels

Cushion / Solid Rubber	76
Cushion / Solid Rubber with	77
Decorative Side Plates	
Hard / Solid Rubber	77
Welded Disc Rubber.....	78
Welded Disc Polyurethane.....	78
PolyLoc™ Polyurethane	79-80
Advantage™ TPR Flat/Round Tread	81-82
Solid Elastomer.....	83
TPR / Polyolefin.....	83
Moldon Rubber / Aluminum Core	84
Moldon Polyurethane / Aluminum Core.....	85
Moldon Rubber / Cast Iron Core	86
Moldon Polyurethane / Cast Iron Core	86
NEW High Modulus Rubber	87
Full-Pneumatic	87
Polyolefin.....	88
NEW Hi-Temp Resin	88
Phenolic.....	89
NEW High Temp Phenolic	89
Cast Iron.....	90
V-Groove.....	90

Options / Accessories

Brakes / Swivel Locks.....	91-92
Swivel Seals	93
Floor Locks.....	93
Thread Guards.....	94
Bumpers.....	95
Applicators / Adapters.....	95
Stem Mounting Options	96
Plate Mounting Options.....	97-99

Built For Speed!



10,000 casters per hour, 240,000 casters per day! Jarvis global manufacturing capability is built for speed and quality.

We put our pedal to the metal. Jarvis has the global resources and fully automated manufacturing processes to meet your needs with remarkable speed and reliability.

During any given 24-hour period, Jarvis international manufacturing can produce

240,000 casters... that's over 10,000 casters per hour!

Jarvis invests in the latest automated caster manufacturing equipment, training and processes to make sure your orders are built to your specifications, when you need them and at a globally competitive price.

Promises made, promises kept. Your deadlines are our deadlines. We realize the importance of getting your caster order out on time, every time.

This is why we maintain a large yet flexible inventory of complete casters, as well as a staggering variety of special stems, top plates, brake designs and wheel types.

Our world-class, automated manufacturing facilities located around the globe enable us to quickly build, certify, ship and service your needs.





Millions of component parts allow for complete flexibility to build just the right caster you need to fit your application.

Wired tight at every corner. Jarvis has implemented the latest inventory processing and manufacturing platforms to ensure consistent shipments.

This system is supported internally within each Jarvis



The latest RF scanner technology is used to track inventory and production parts.

facility using the latest RF wireless scanning technology to track inventory and production parts.

We specialize in specials.

At Jarvis, special stems or top plates, unique mounting designs and custom plating technology have been our specialty for more than 80 years.

This is another important reason you see Jarvis casters on internationally recognized brands of food service, medical and institutional equipment around the world.



Jarvis offers a vast selection of different stems, top plates, brakes and special mounting options.



Committed to your success!



Your voice at Jarvis. Our staff of inside Customer Service Representatives is empowered to

make decisions to serve your needs.

Each member is cross-trained in Jarvis manufacturing and

assembly processes. They receive a “hands-on” education in engineering procedures, quality control inspection, shipping and receiving operations, purchasing dynamics and accounting fundamentals.

This is why each Jarvis customer is partnered with a Customer Service Representative who knows your business and stands ready to support your needs.

Caster experts on wheels. Jarvis Regional Managers are your on-site caster and wheel experts. Each is an authority on the Jarvis product line as well as caster applications and designs. They are readily available to visit your location and offer assistance to support your initiatives.



Jarvis Regional Managers bring solutions to our customer's doorsteps with their extensive experience and knowledge of the Jarvis product line.



CAN-AM is located in Toronto and serves customers throughout Canada.



The new Jarvis China facility is one of the most modern and efficient caster manufacturing plants in the world.

Push the Easy Button.

We pride ourselves on being an “easy-to-do-business-with” company – 24 hours a day – 7 days a week.

The new Jarvis “VIP” E-commerce site lets you instantly access real time information about virtually all aspects of your order.

For example, you can check your current order status, view the inventory levels of your casters, access tracking numbers, review quotes or examine previous invoices.

Even better, you can place your order on-line by *your* part numbers and receive order acknowledgements within

seconds. Jarvis is THE caster industry leader in technology.

Different languages, one standard of quality.

Jarvis casters are all manufactured to the same exact specifications.

All Jarvis facilities adhere to the same print, process and the highest quality standards in the global caster market.

From every corner of the world, we are Jarvis, and we are committed to your success. You have our name on it!



Located in Jackson, Tennessee, the Jarvis Flagship plant features over 165,000 square feet of manufacturing and office space.




Jarvis Model Numbers

Casters

Below model is a 5" wheel diameter 30 Series swivel caster with Flat Tread Advantage wheel with VertiLoc® brake.


5-30-213GF VL

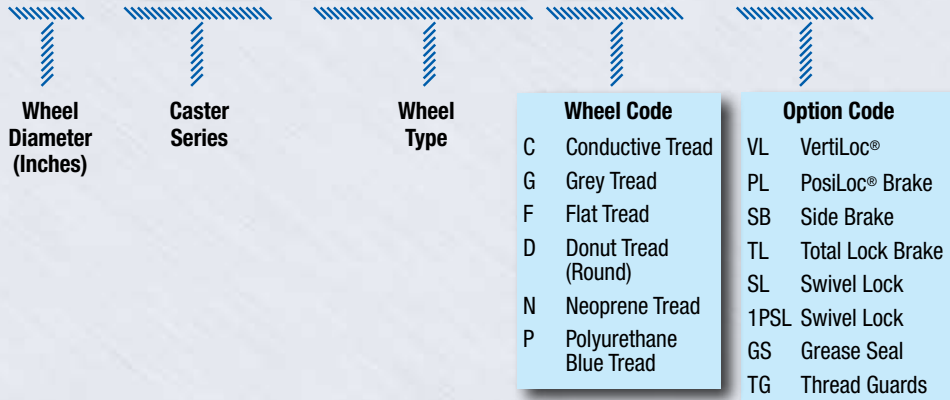

Wheels

Below model is a 5" wheel diameter Flat Tread Advantage wheel with ball bearing.


5-213GF

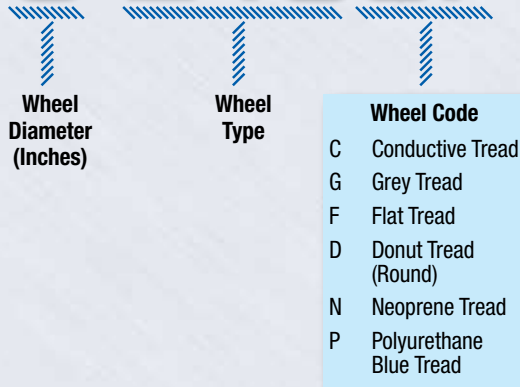

Forks


Below model is a 5" diameter 30 Series swivel fork.

5-30-000-PLT 2

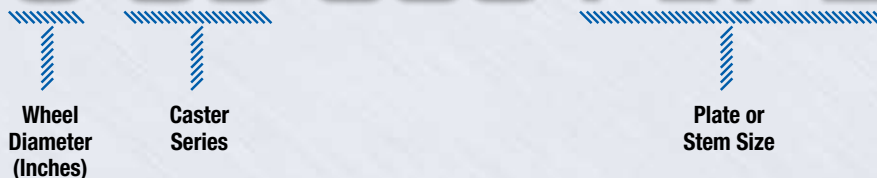



Caster Terms

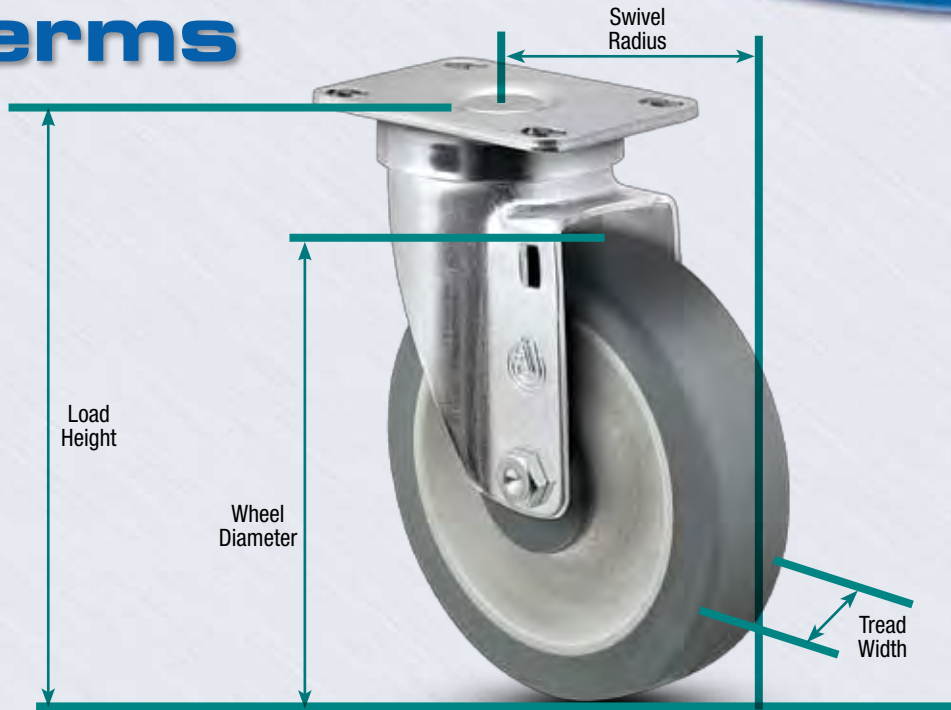

Helpful Terms

Bolt Hole Spacing: The distance between top plate bolt holes.

Capacity: Maximum load per caster based on expected operation (expected maximum load divided by number of casters).

Caster Size: Same as wheel diameter.

Dynamic or Rolling Load: Load on a caster or wheel while in motion.

Fork Assembly (Rig or Yoke): The caster assembly without wheel and axle.

Load Height: Vertical distance from top surface of top plate to the bottom of the wheel.

Mounting (Top) Plate: The plate at the top of the caster which is bolted or welded to the equipment.

Offset: Horizontal distance between the centerline of the swivel kingpin and the centerline of the axle. Shorter offsets are stronger while longer offsets improve maneuverability.

Raceway: Surface on which ball bearings roll.

Rollability: Force required to begin or maintain motion.

Spanner Bushing: The fixed sleeve in which the axle runs.

Static Load: Load on a caster or wheel while at rest.

Swivel Radius: Horizontal distance between the centerline of the swivel kingpin and the outside edge of the wheel.


Thrust Washer: The washer between the wheel hub and the inside of the caster leg.

TPR: Thermoplastic Rubber

Tread Width (Face): Width of the wheel tread.


Caster Installation Tips

Shown below are several typical caster mounting arrangements often used on carts, trucks and other mobile equipment. Each arrangement offers its own advantages and performance qualities.




Two Swivel, Two Rigid Pattern

A common design which allows for swiveling ease yet allows cart to track in a straight line for long distances.




Four Swivel Pattern

A versatile arrangement which allows for maximum maneuverability and the ability to move the cart sideways. Not recommended for long straight line tracking.



Four Rigid Tilt Mounting Center wheels

Center wheels 1/8" taller than front/rear wheels. Economical, but not recommended for ramps or heavy duty loads.




Two Swivel, Two Rigid Diamond Pattern

A very maneuverable design that allows cart to turn in its own length.



Four Swivel, Two Rigid Pattern

Recommended for heavy loads and long carts or equipment. The two rigid casters help support the load and reduce the weights on the swivel casters. This allows for greater swiveling ease and maneuverability.



Three Swivel Pattern

Recommended for barrel dollies and small equipment. Excellent swiveling and maneuvering ease in all directions.



How to Select the Correct Caster & Wheel

Important Notice

Selecting the correct caster for your application is very important. If you do not select the correct caster, you or the users of your equipment could be injured. If you are not absolutely certain which caster is the correct one for your use, contact a safety or engineering consultant who knows your equipment and its intended use to assist you.

Introduction

Casters and wheels are offered in a wide variety of sizes and types. Although there is no simple formula to follow in choosing the proper caster or wheel, the information shown below and on the following pages is intended as a guide to assist you in specifying, operating and maintaining casters for safety and maximum life. Please read this information carefully.

Load Weight & Wheel Size

The first consideration for caster selection is to determine the combined weight of the equipment and maximum load on this equipment. Generally, the greater the weight, the larger the wheel required for the caster. Larger wheels distribute weight and roll more easily over floor obstructions.

To determine the load capacity for each caster, divide the combined weight of the equipment and maximum load by the number of casters to be used. This is the load that each caster and wheel must support. Always select a caster and wheel that are rated for a capacity *greater* than the calculated load per caster. This allows for unusual conditions that could change the performance of the caster. All Jarvis capacity ratings shown in this catalog are rated at their maximum *dynamic* or rolling load.

Wheel Choices

As a general rule, hard tread wheels perform better on soft or smooth floors and soft tread wheels roll better on hard or rough floors including outdoor surfaces. When choosing a wheel type, take



into consideration all special floor conditions – tracks, gutters, grates, sills, elevator thresholds, seams and dock plates. The larger and softer the wheel, the greater the ability to roll over rails and similar obstacles.

To protect floors from damage, choose softer cushion tread wheels. Solid Cushion Rubber, Advantage™ TPR (thermoplastic rubber), High Modulus Rubber and Pneumatic Rubber wheels will provide quiet operation and maximum floor protection. Steel and Cast Iron wheels are not recommended for floor protection, but they are well suited for industrial applications.

Polyurethane wheels like Jarvis PolyLoc™, Welded Disc Polyurethane and Moldon Polyurethane wheels are frequently an effective compromise giving moderate floor protection with greater load capacity.

Wheel Bearings

Jarvis wheels are available with various types of bearings each best suited for various applications and uses. Below is basic information about each of these wheel bearings:




Sintered Iron Bearing

An economical, oil-impregnated bearing suited for light loads or heavier loads that are stationary most of the time.

Plain Bearing

Wheel bearing bore riding directly on the spanner bushing and/or axle.



Ball Bearing

Recommended for loads where maximum rolling ease is required. They require less effort to start rolling and keep rolling than other bearing types.

Roller Bearing

This bearing carries greater loads than same size ball bearing. Well suited for heavier, industrial uses.



Delrin® Bearing

An economical bearing well suited to conditions of frequent exposure to water, steam cleaning, salts, brine and corrosive conditions.

Unusual / Special Operating Conditions

Often unusual operating conditions require selection of casters and wheels with special features. Listed below are several guidelines for selecting casters for special conditions:



- The presence of acids, oils or corrosive chemicals require wheels made of polyurethane, phenolic, polyolefin or steel.
- Extreme temperatures require special bearing lubricants or plain bore bearings.
- Never use rubber tread wheels in corrosive environments.
- In hospitals, bakeries and food processing plants where cart washings are required, select nickel-plated casters with raceway grease seals and zerk grease fittings.
- For very frequent wash down applications or wet environments, specify Jarvis stainless steel casters.
- In textile plants and laundries, specify casters with thread guards to reduce the collection of thread, string and general floor debris.
- For office machines such as copiers which require a low load height, choose Jarvis business machine casters.





Safety & Maintenance Information

Important Notice

If you are using Jarvis casters as a component part on equipment for resale, you must advise and pass along this information to those who purchase this equipment. You should place the proper instructions on your product to relay this information to the user.

General Safety & Maintenance Information:

Users are responsible for the proper operation and maintenance of the equipment they use. Some equipment will quickly become damaged and unsafe if abused or subjected to improper demands. If equipment is regularly maintained and not abused, you will get the maximum safety and service performance from your casters.

- Do not overload equipment
- Do not drop heavy loads on carts or trucks
- Do not use at high speeds

These uses create severe impact and shock loads that may lead to caster, wheel and equipment failure.

Important Caster Installation Notes



- If using threaded mounts, installer must add washers to cover incomplete threads and support upper raceway.
- The stem shoulder must fit tight against equipment.
- It is customer's responsibility to mount the caster in a proper manner so there will be no risk to operator safety.
- It is the customer's responsibility to determine the fitness of a caster for a particular application.

Check Equipment Frames & Fasteners

Periodically turn equipment on its end or side and check the following:

- Look for broken welds or deck boards.
- Tighten loose nuts and bolts.

- Look for equipment frame distortion caused by overloads and impact loads. Distorted frames can lead to wheel failure by placing disproportionate loads on one or two casters.
- If casters are stem types, make sure that the legs of the equipment are not bent and that mounting bolts are securely fastened.
- Always use locknuts or lock washers to mount casters to equipment.
- Make certain casters with expanding adapter stems are held firmly in place in tubular equipment.

Caster & Wheel Lubrication

Caster and wheel lubrication is essential. The lubrication schedule depends on your specific application. Normal conditions may warrant lubrication every six months. However, for wet or corrosive applications, monthly lubrication may be necessary.

Lubrication may also be required after each cart washing. Special high temperature, water resistant lubricants must be used for these applications. Jarvis can provide stainless steel casters that require less maintenance in frequent cart washing applications.

Standard Jarvis grease temperature range: -45°F to +260°F.

Grease Seal temperature range: -45°F to +260°F.

Caster Maintenance & Inspection

Check the swivel assembly for excessive play due to wear. If the swivel assembly is loose, it is advisable to replace the fork or the entire caster. If the caster has a king bolt and nut, make sure it is fastened securely. If the swivel does not turn freely, check for corrosion or dirt binding the raceways. Again, it may be necessary to replace the swivel assembly or the entire caster.



If the equipment has rigid casters at one end, make sure that the caster fork legs are not bent or distorted.

Wheel Maintenance & Inspection

Check wheels for visible tread wear. Flat spots may indicate accumulation of floor debris such as string or thread which can cause the wheel to bind. Remove the wheel axle bolt and nut. Clean out foreign material and check wheel bearings for wear or failure. Re-assemble if parts are not damaged. Wheel thread guards may be installed to reduce buildup if string and thread wrapping is a continuing problem.



After wheels have been inspected and repaired or replaced, be sure to install a new axle nut and tighten it properly. Use lock washers or lock nuts on all axles.

Brake Maintenance & Inspection

Check brakes for proper operation. If brakes slip due to worn or damaged wheels, replace the wheels immediately and retest the brakes. If the brake mechanism itself is not operating properly, repair or replace it. Before returning the equipment to use, always retest brakes.



Power Towed Operation

Power drawn equipment such as in a tow line or mechanically moved by conveyor will require casters, wheels and bearings specifically designed for this use. **Please consult factory for caster recommendation for each specific towing or power drawn equipment application.**



SAFETY / MAINTENANCE

Wheel Selection



5-105
(shown in photo)

Cushion or Hard / Solid Rubber

Cushion or hard rubber tread. Conductive models available. Capacity up to 400 lbs. each. See page 76-77.



5-452
(shown in photo)

Cushion / Solid Rubber with Decorative Side Plates

Cushion Rubber tread with decorative metal side plates. Grey wheels available. Capacity up to 220 lbs. each. See page 77.



5-201G
(shown in photo)

TPR / Polyolefin

Grey thermoplastic rubber tread bonded to black polyolefin wheel core. Capacity up to 125 lbs. each. See page 83.



5-113 & 5-113P
(shown in photo)

Welded Disc / Rubber & Polyurethane

Black or grey neoprene rubber or blue polyurethane tread compressed between two steel discs welded together. Capacity up to 250 lbs. each. See page 78.



5-213GF
(shown in photo)

Advantage™ TPR Flat

Flat grey special modulus TPR tread bonded to polyolefin wheel core. Capacity up to 325 lbs. each. See page 81.



5-213GD
(shown in photo)

Advantage™ TPR Round

Round grey special modulus TPR tread bonded to polyolefin wheel core. Capacity up to 300 lbs. each. See page 81.



6-220GF
(shown in photo)

Advantage HD™ TPR Flat

Flat grey special modulus TPR tread bonded to polyolefin wheel core. Capacity up to 675 lbs. each. See page 82.



6-220GD
(shown in photo)

Advantage HD™ TPR Round

Round grey special modulus TPR tread bonded to polyolefin wheel core. Capacity up to 500 lbs. each. See page 82.



6-600
(shown in photo)

High Modulus Rubber

Round tread modulus black rubber compound bonded to aluminum core. Grey tread available. Capacity up to 550 lbs. each. See page 87.



8-940
(shown in photo)

Full Pneumatic

Air filled tire for maximum cushion ride and floor protection. Capacity up to 470 lbs. each. See page 87.



6-522
(shown in photo)

Polyolefin

Light weight yet durable hard tread solid polyolefin construction. Capacity up to 900 lbs. each. See page 88.



6-222
(shown in photo)

Phenolic

Hard tread wheels made of compression molded phenolic resin filled with macerated fabric. High temperature models available. Capacity up to 1,400 lbs. each. See page 89.

WHEEL SELECTION



NEW



5-521 NHT
(shown in photo)

Hi-Temp Resin

Exclusive blended resin compound is designed to withstand the extreme high-tempeatures required by certain industries and applications. Capacity up to 600 lbs. each. See page 88.



5-213G
(shown in photo)

PolyLoc™/ Grey Polyurethane

Grey polyurethane tread mechanically locked to polyolefin wheel core. Capacity up to 350 lbs. each. See page 79.



5-213P
(shown in photo)

PolyLoc™/ Blue Polyurethane

Blue polyurethane tread mechanically locked to polyolefin wheel core. Capacity up to 350 lbs. each. See page 79.



6-220G
(shown in photo)

PolyLoc™/ Grey Polyurethane

Flat grey polyurethane tread mechanically locked to polyolefin wheel core. Capacity up to 1,000 lbs. each. See page 80.



6-220
(shown in photo)

PolyLoc™/ Blue Polyurethane

Flat blue polyurethane tread mechanically locked to polyolefin wheel core. Capacity up to 1,000 lbs. each. See page 80.



6-760
(shown in photo)

Solid Elastomer

Offers best rollability under heavy loads. Capacity up to 1,250 lbs. each. See page 83.



6-620
(shown in photo)

Moldon Rubber / Aluminum Core

Cushion rubber tread vulcanized to a die-cast aluminum core. Capacity up to 500 lbs. each. See page 84.



6-720
(shown in photo)

Moldon Polyurethane / Aluminum Core

Blue polyurethane tread vulcanized to a die-cast aluminum core. Capacity up to 1,200 lbs. each. See page 85.



6-620CI
(shown in photo)

Moldon Rubber / Cast Iron Core

Heavy duty rubber tread bonded to cast iron wheel core. Capacity up to 500 lbs. each. See page 86.



6-720CI
(shown in photo)

Moldon Polyurethane / Cast Iron Core

Heavy duty polyurethane tread bonded to cast iron wheel core. Capacity up to 1,500 lbs. each. See page 86.



6-250
(shown in photo)

Cast Iron

High capacity premium cast iron. Capacity up to 1,500 lbs. each. See page 90.



6-250V
(shown in photo)

V-Groove

Cast iron wheels V-grooved for use on inverted angle iron track. Capacity up to 1,000 lbs. each. See page 90.

WHEEL SELECTION



Wheel Selection Guide

This chart is designed to provide the user a general comparison of Jarvis wheel types on a variety of floor surfaces and under a wide range of operating conditions. For specific applications or unusual conditions, please consult factory:

Standard Jarvis grease temperature range: -45°F to +260°F.

Wheel Type	Capacity Range Per Wheel	Temperature Range	Hardness	Page Number
CUSHION / SOLID RUBBER	Up to 260 lbs.	-30° to +160° F	75 (±) 5 (A)	76-77
HARD / SOLID RUBBER	Up to 400 lbs.	-30° to +160° F	75 (±) 5 (D)	77
WELDED DISC / RUBBER	Up to 250 lbs.	-40° to +160° F	75 (±) 5 (A)	78
WELDED DISC / POLYURETHANE	Up to 300 lbs.	-40° to +180° F	95 (±) 5 (A)	78
ADVANTAGE TPR	Up to 675 lbs.	-40° to +180° F	65 (±) 5 (A)	81-82
HIGH MODULUS RUBBER	Up to 550 lbs.	-40° to +160° F	65 (±) 5 (A)	87
FULL PNEUMATIC RUBBER	Up to 470 lbs.	-20° to +160° F	-----	87
POLYOLEFIN	Up to 900 lbs.	-20° to +180° F	65 (±) 5 (D)	88
HI-TEMP RESIN	Up to 600 lbs.	-20° to +475° F	75 (±) 5 (D)	88
POLYLOC GREY OR BLUE POLYURETHANE	Up to 1,000 lbs.	-30° to +180° F	95 (±) 5 (A)	79-80
SOLID ELASTOMER	Up to 1,250 lbs.	-40° to +230° F	73 (±) 5 (D)	83
MOLDON RUBBER / ALUMINUM CORE	Up to 500 lbs.	-40° to +160° F	75 (±) 5 (A)	84
MOLDON POLYURETHANE / ALUMINUM CORE	Up to 1,200 lbs.	-40° to +160° F	55 (±) 5 (D)	85
MOLDON RUBBER / CAST IRON CORE	Up to 500 lbs.	-40° to +160° F	75 (±) 5 (A)	86
MOLDON POLYURETHANE / CAST IRON CORE	Up to 1,500 lbs.	-30° to +180° F	55 (±) 5 (D)	86
PHENOLIC	Up to 1,400 lbs.	-45° to +250° F	90(±) 5 (D)	89
CAST IRON	Up to 1,500lbs.	-45° to +250° F	-----	90
V-GROOVE	Up to 1,000 lbs.	-45° to +250° F	-----	90

Floor Surfaces

Wheel Type	Carpet	Brick	Concrete	Linoleum	Asphalt	Terrazzo	Wood	Smooth Steel	Ribbed Steel	Tile
CUSHION / SOLID RUBBER	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
HARD / SOLID RUBBER	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
WELDED DISC / RUBBER	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
WELDED DISC / POLYURETHANE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
ADVANTAGE TPR	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
HIGH MODULUS RUBBER	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
FULL PNEUMATIC RUBBER	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
POLYOLEFIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
HI-TEMP RESIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
POLYLOC GREY OR BLUE POLYURETHANE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SOLID ELASTOMER	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MOLDON RUBBER / ALUMINUM CORE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MOLDON POLYURETHANE / ALUMINUM CORE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MOLDON RUBBER / CAST IRON CORE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MOLDON POLYURETHANE / CAST IRON CORE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CAST IRON			✓					✓		
V-GROOVE			✓					✓		

Operating Conditions

Wheel Type	Water	Steam	Mild Chemicals	Oil/Grease	Metal Chips	High Heat > +250°F	Extreme Cold -20°F	Animal Fats	Noise Reduction	Floor Protection	Shock Absorption
CUSHION / SOLID RUBBER	✓	✓	✓				✓	✓	✓	✓	✓
HARD / SOLID RUBBER	✓	✓	✓	✓	✓		✓	✓	✓	✓	
WELDED DISC / RUBBER	✓	✓	✓	✓	✓		✓	✓	✓	✓	
WELDED DISC / POLYURETHANE	✓	✓	✓	✓	✓		✓	✓	✓	✓	
ADVANTAGE TPR	✓	✓	✓	✓	✓		✓	✓	✓	✓	
HIGH MODULUS RUBBER	✓	✓	✓	✓			✓	✓	✓	✓	✓
FULL PNEUMATIC RUBBER	✓	✓	✓	✓			✓	✓	✓	✓	✓
POLYOLEFIN	✓	✓	✓	✓			✓	✓	✓	✓	
HI-TEMP RESIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
POLYLOC GREY OR BLUE POLYURETHANE	✓	✓	✓	✓	✓		✓	✓	✓	✓	
SOLID ELASTOMER	✓	✓	✓	✓	✓		✓	✓	✓	✓	
MOLDON RUBBER / ALUMINUM CORE	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
MOLDON POLYURETHANE / ALUMINUM CORE	✓	✓	✓	✓	✓		✓	✓	✓	✓	
MOLDON RUBBER / CAST IRON CORE	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
MOLDON POLYURETHANE / CAST IRON CORE	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
PHENOLIC	✓	✓	✓	✓		✓	✓	✓	✓	✓	
CAST IRON			✓	✓	✓	✓	✓	✓	✓	✓	
V-GROOVE			✓	✓	✓	✓	✓	✓	✓	✓	

WHEEL SELECTION GUIDE



Wheel Bearings



Sintered Iron Bearing

An economical, oil-impregnated bearing suited for light loads or heavier loads that are stationary most of the time. Recommended for applications where rolling ease is not critical or lubrication is difficult.



Plain Bearing

Refers to wheel bearing bore riding directly on spanner bushing or axle. A cost effective bearing used for applications where rolling ease is not important.



Delrin® Bearing

A Dupont engineered plastic, this bearing is well suited to conditions of frequent exposure to water, steam cleaning, liquids and corrosion. Used in pairs, they are self-lubricating and designed to withstand high humidity and high moisture conditions that will rust metal bearings.



Roller Bearing

A popular bearing for wheels from 1-1/2" to 2-1/2" wide and for heavier loads. The roller bearing carries greater loads than same size ball bearing with excellent rolling ease. It has split outer hardened steel raceway into which roller assembly cage is inserted. This bearing must be used on a hardened steel spanner bushing or axle. **Stainless steel roller bearing available—consult factory.**



Flanged Radial Ball Bearing

Non-precision industrial grade bearings are press-fitted into wheel hubs.



Precision Sealed Ball Bearing

For maximum rolling ease with no lubrication required. Integral spanner bushing eliminates need for separate spanner bushing.



Ball Bearing

Recommended for lighter loads where maximum rolling ease is required. Because of minimal ball contact area, ball bearings are the least frictional type of caster wheel bearing. They require less effort to start rolling and keep rolling than other bearing types. Ball bearings are generally factory installed in wheels.

BEARINGS / FINISHES

Special Finishes

In addition to our standard zinc and nickel plating, Jarvis offers the industry's largest selection of special plating and finish options. These special finishes can enhance the appearance of your equipment or offer extra protection in harsh environments. Shown below is a representative sampling of a few of these optional finishes. Please consult factory for pricing and availability.



Black Phosphate



Black Powder Coat



Grey Polane



Bright Chrome



Yellow Chromate



Bright Brass



Special Caster Designs


Jarvis specializes in specials. We have a long established reputation for designing and building unique designs that meet our customer's special needs. Below are a few examples of our engineering & manufacturing capabilities.



Low profile shock absorbing caster provides extra cushion ride for important cargo.



Unique tabbed top plate is designed for installation on equipment. Tabs are bent down during installation to secure to equipment.

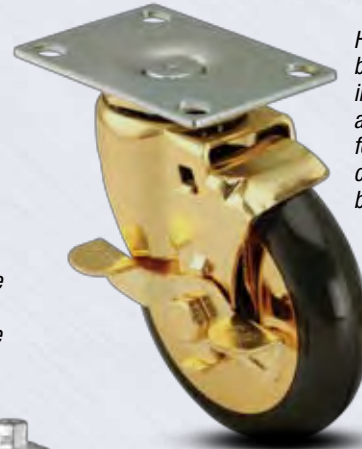

Highly polished brass finish improves the appearance of food service carts and banquet tables.

Adjustable load height stem caster especially designed for food service equipment. Ring on stem marks maximum adjustment height when mounted on threaded stem equipment leg.



Swivel caster with black oxide finish features both an adjustable load height stem and top plate mounting.



"Waffle" design rigid fork allows for multiple wheel positions.



Heavy duty, shock absorbing casters feature unique Jarvis torsion spring design to provide a smooth ride over rough floors and obstacles. Mag-style wheel adds to the visual appeal of this caster used on heavy duty tool boxes.

SPECIAL CASTER DESIGNS



Adjustable height leg caster allows for flexible working heights on food service equipment that requires leveling on uneven floors.



Extra long threaded stem caster is designed to meet customer's requirements.



Special 30 Series caster with brake and combination top plate and adjustable stem.



Dual spring ring stem caster is used to connect two mobile racks together for a special customer application.



Extra large, double spring ring square stem holds this 31 Series rigid caster securely in place.



Pneumatic casters with special brass plating are well suited to bellman carts and high-end institutional equipment.



Swivel caster features large top plate with easy-to-reach, foot operated direction lock for straight tracking down long hallways.

SPECIAL CASTER DESIGNS

L2-L9 Series

Light Duty

Capacity to 75 pounds each

FEATURES

- ✓ **Finish:** nickel plating to resist rust and corrosion.
- ✓ **Swivel Construction:** durable double ball raceway.
- ✓ **Axle:** 1/4" diameter.

CASTER OPTIONS



✓ **Brake:** available on quantity orders—consult factory.



3-L2-201G
(shown in photo)




3-L3-201G
(shown in photo)



3-L4-201G
(shown in photo)



3-L5-101
(shown in photo)



3-L9-201G
(shown in photo)

L2 Round Stem

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Round Stem Model Number	Load Height (Inches)	Swivel Radius (Inches)
2	13/16	CUSHION RUBBER	PLAIN	75	2-L2-201G	2 1/2	17/8
3		CUSHION RUBBER	PLAIN	75	3-L2-201G	3 1/2	29/16

Stem Size: For metal sockets 7/16" diameter x 1-29/32" long

L3 Spring Ring Stem

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Ring Stem Model Number	Load Height (Inches)	Swivel Radius (Inches)
2	13/16	CUSHION RUBBER	PLAIN	75	2-L3-201G	2 1/2	17/8
3		CUSHION RUBBER	PLAIN	75	3-L3-201G	3 1/2	29/16

Stem Size: 7/16" diameter x 1-3/8" long

L4 Threaded Stem

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number	Load Height (Inches)	Swivel Radius (Inches)
2	13/16	CUSHION RUBBER	PLAIN	75	2-L4-201G	2 1/2	17/8
3		CUSHION RUBBER	PLAIN	75	3-L4-201G	3 1/2	29/16

Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 3-L4-201G **STEM1**)

STEM 1: 5/16" diameter – 18 x 3/4" long

STEM 3: 3/8" diameter – 16 x 1-1/2" long

STEM 2: 3/8" diameter – 16 x 1" long

L5 Ladder Style Stem

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Ladder Style Model Number	Load Height (Inches)	Swivel Radius (Inches)
2	13/16	CUSHION BLACK RUBBER	PLAIN	75	2-L5-101	2 1/2	17/8
3		CUSHION BLACK RUBBER	PLAIN	75	3-L5-101	3 1/2	29/16

Stem Size: 5/16" diameter – 18 x 4-3/4" long with 5/8" thread length at top of stem; bottom stem flange is 9/16" diameter x 1-13/16" long

L9 Swivel Top Plate

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Top Plate Model Number	Load Height (Inches)	Swivel Radius (Inches)
2	13/16	CUSHION RUBBER	PLAIN	75	2-L9-201G	2 1/2	17/8
3		CUSHION RUBBER	PLAIN	75	3-L9-201G	3 1/2	29/16

Top Plate Size: 1-3/16" x 2" • **Bolt Hole Spacing:** 13/16" x 1-9/16" • **Mounting Bolt Size:** 3/16" diameter



291 Series

General Duty

Capacity to 400 pounds each

FEATURES

- ✓ **Design:** low profile design for lower equipment height.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** large raceways are deeply embossed for extra strength and bearing surface. Special precision kingpin engineered for thrust absorption and long service life.
- ✓ **Axle:** Nut and bolt axles.
 - 2" wheels use 1/4" diameter axle.
 - 2 1/2" wheels use 5/16" diameter axle.
 - 3" wheels use 3/8" axle.
 - 4" wheels use 7/16" diameter axle.

CASTER OPTIONS

- ✓  **Brake:** available on quantity orders—consult factory.



3-292-106
(shown in photo)

3-291-106
(shown in photo)

MOUNTING OPTIONS

Swivel Casters:

Wheel Diameter (Inches)	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
2	1-7/8" x 2-5/8"	15/16" x 2-1/8"	1/4
2-1/2	2-5/8" x 3-3/4"	1-3/4" x 3"	5/16
3	3-1/8" x 4-1/8"	2-3/8" x 3-7/16"	5/16
4	4" x 5"	3" x 4"	3/8

Rigid Casters:

Wheel Diameter (Inches)	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
2	1-7/8" x 2-5/8"	15/16" x 2-1/8"	1/4
2-1/2	2-1/8" x 4-3/8"	1-1/16" x 3-15/32"	5/16
3	2-1/2" x 4-7/8"	1-3/16" x 4"	5/16
4	3-1/4" x 6-1/4"	1-3/4" x 5"	3/8

291 SERIES

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
2	1	CUSHION GREY / SOLID RUBBER	SINTERED	90	2-291-103	2-292-103	3/4	2 1/2	1 11/16
		POLYOLEFIN	PLAIN	120	2-291-501	2-292-501			
		HARD TREAD / SOLID RUBBER	SINTERED	125	2-291-104	2-292-104			
		CAST IRON	PLAIN	125	2-291-120	2-292-120			
2 1/2	1 1/8	CAST IRON	PLAIN	125	2-1/2-291-120	2-1/2-292-120			
3	1 9/32	CUSHION GREY / SOLID RUBBER	DELRIN	140	3-291-105	3-292-105	1 3/8	3 13/16	2 5/16
		HARD TREAD / SOLID RUBBER	DELRIN	180	3-291-106	3-292-106			
	1 1/4	CAST IRON	PLAIN	250	3-291-120	3-292-120	2		
		POLYOLEFIN	PLAIN	250	3-291-521	3-292-521			
4	1 5/8	CUSHION GREY / SOLID RUBBER	SINTERED	240	4-291-109	4-292-109	3 1/2	5	2 15/16
		HARD TREAD / SOLID RUBBER	ROLLER	240	4-291-210	4-292-210			
		HARD TREAD / SOLID RUBBER	SINTERED	400	4-291-110	4-292-110			
		CUSHION GREY / SOLID RUBBER	ROLLER	400	4-291-209	4-292-209			
	1 1/2	CAST IRON	PLAIN	400	4-291-130	4-292-130	4 1/2		
		CAST IRON	ROLLER	400	4-291-230	4-292-230			

Business Machine

Dual Wheel

Capacity to 200 pounds each

FEATURES

- ✓ **Design:** low profile design for lower equipment height.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** durable double ball raceway.
- ✓ **Axle:** 5/16" diameter nut & bolt.

CASTER OPTIONS

- ✓  **Hex Head Brake:** to order, add "HHBRK" to end of caster model number.
- ✓  **Thumb Screw Brake:** to order, add "TSBRK" to end of caster model number.
- ✓  **Black Oxide Finish:** consult factory.
- ✓ **Optional plates and stems:** wide variety available—consult factory.
- ✓ **Swivel Models Less Dust Cap:** consult factory.
- ✓ **Brass Spring Ring:** available on spring ring stem models (consult factory).




22-30-102-2
(shown in photo)

Swivel Top Plate

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Plate Model Number	Load Height (Inches)	Swivel Radius (Inches)
2" Dual	13/16	CUSHION GREY / SOLID RUBBER	SINTERED	160	22-30-101-2	2 15/16	2
		HARD TREAD / SOLID RUBBER	SINTERED	200	22-30-102-2		
	7/8	POLYOLEFIN	PLAIN	200	22-30-501-2		

Top Plate Size: 2-3/8" x 3-5/8" • Bolt Hole Centers: 1-3/4" x 3" • Mounting Bolt Size: 5/16" diameter



22-31-102-2
(shown in photo)

Rigid Top Plate

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Rigid Plate Model Number	Load Height (Inches)	Swivel Radius (Inches)
2" Dual	13/16	CUSHION GREY / SOLID RUBBER	SINTERED	160	22-31-101-2	2 15/16	N/A
		HARD TREAD / SOLID RUBBER	SINTERED	200	22-31-102-2		
	7/8	POLYOLEFIN	PLAIN	200	22-31-501-2		

Top Plate Size: 2-3/8" x 3-5/8" • Bolt Hole Centers: 1-3/4" x 3" • Mounting Bolt Size: 5/16" diameter



22-34-102
(shown in photo)

Spring Ring Stem

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Ring Model Number	Load Height (Inches)	Swivel Radius (Inches)
2" Dual	13/16	CUSHION GREY / SOLID RUBBER	SINTERED	160	22-34-101	2 3/4	2
		HARD TREAD / SOLID RUBBER	SINTERED	200	22-34-102		
	7/8	POLYOLEFIN	PLAIN	200	22-34-501		

Stem Size: 7/16" diameter x 1-3/8" long. Brass spring ring is available (consult factory).



22-36-102
(shown in photo)

Threaded Stem

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number	Load Height (Inches)	Swivel Radius (Inches)
2" Dual	13/16	CUSHION GREY / SOLID RUBBER	SINTERED	160	22-36-101	2 3/4	2
		HARD TREAD / SOLID RUBBER	SINTERED	200	22-36-102		
	7/8	POLYOLEFIN	PLAIN	200	22-36-501		

Standard Stem Size: 1/2" diameter-13 x 1-3/4" long



Business Machine




Single Wheel

Capacity to 350 pounds each

FEATURES

- ✓ **Design:** low profile design for lower equipment height.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** durable double ball raceway.
- ✓ **Axle:** Nut and bolt axle.
2-1/2" wheels use 5/16" diameter axle.
3" wheels use 3/8" diameter axle.

CASTER OPTIONS

- ✓  **VertiLoc® Brake:** Available on 3" models only. To order, add "VL" to end of model number.
- ✓  **PosiLoc® Brake:** Available on 3" models only. To order, add "PL" to end of model number.
- ✓  **Black Oxide Finish:** consult factory.
- ✓ **Optional plates and stems:** wide variety available—consult factory.



Swivel Top Plate

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Plate Model Number	Load Height (Inches)	Swivel Radius (Inches)
2 1/2	1 1/8	POLYOLEFIN	PLAIN	200	2-1/2-25-511-4	3 5/16	2 3/8
	1 3/8	POLYOLEFIN	BALL	350	2-1/2-3A-522-2	3 7/16	2 1/2
3	1 1/4	POLYOLEFIN	PLAIN	300	3-W25-521-4	3 13/16	2 7/8
	1 1/2	PHENOLIC	PLAIN	300	3-W25-121-4	3 13/16	2 7/8

Top Plate Size: 2-3/8" x 3-5/8" • **Bolt Hole Centers:** 1-3/4" x 3" •
Mounting Bolt: 5/16" diameter



Rigid Top Plate

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Rigid Plate Model Number	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/4	POLYOLEFIN	PLAIN	300	3-W26-521-4	3 13/16	N/A
	1 1/2	PHENOLIC	PLAIN	300	3-W26-121-4	3 13/16	N/A

Top Plate Size: 2-3/8" x 3-5/8" • **Bolt Hole Centers:** 1-3/4" x 3" •
Mounting Bolt: 5/16" diameter



Spring Ring Stem

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Stem Model Number	Load Height (Inches)	Swivel Radius (Inches)
2 1/2	1 1/8	POLYOLEFIN	PLAIN	200	2-1/2-14-511	3 5/16	2 3/8
	1 3/8	POLYOLEFIN	BALL	350	2-1/2-34-522	3 7/16	2 1/2
3	1 1/4	POLYOLEFIN	PLAIN	300	3-W14-521	3 13/16	2 7/8
	1 1/2	PHENOLIC	PLAIN	300	3-W14-121	3 13/16	2 7/8

Stem Size: 7/16" diameter x 1-3/8" long



Threaded Stem

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number	Load Height (Inches)	Swivel Radius (Inches)
2 1/2	1 1/8	POLYOLEFIN	PLAIN	200	2-1/2-13-511	3 5/16	2 3/8
	1 3/8	POLYOLEFIN	BALL	350	2-1/2-36-522	3 7/16	2 1/2
3	1 1/4	POLYOLEFIN	PLAIN	300	3-W13-521	3 13/16	2 7/8
	1 1/2	PHENOLIC	PLAIN	300	3-W13-121	3 13/16	2 7/8

Standard Stem Size: 1/2" diameter-13 x 1-1/2" long

BUSINESS MACHINE

Business Machine



Single Wide Wheel

Capacity to 500 pounds each

FEATURES

- ✓ **Design:** low profile design for lower equipment height.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** durable double ball raceway.
- ✓ **Axle:** 3/8" diameter nut & bolt.

CASTER OPTIONS

- ✓  **VertiLoc® Brake:** available on 3" swivel models only. To order, add "VL" to end of model number.
- ✓  **Black Oxide Finish:** consult factory.
- ✓ **Optional plates and stems:** wide variety available—consult factory.

Swivel & Rigid Plate Mounting Options

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 1	2-3/8" x 3-5/8"	1-3/4" x 3"	1/4"
PLT 2	2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"
PLT 3	3-1/8" x 4-1/8"	2-3/8" x 3-3/8"	5/16"
PLT 4	4" x 4"	3" x 3"	3/8"
PLT 5	3-3/4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

Swivel & Rigid Caster Mounting Options: (Example: 2-1/2-130-222 PLT 2)

Swivel Top Plate

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Plate Model Number	Load Height (Inches)	Swivel Radius (Inches)
2 1/2	1 13/16	PHENOLIC	ROLLER	400	2-1/2-130-222	3 1/2	2 1/8
		POLYOLEFIN	PLAIN	400	2-1/2-130-531		
		POLYOLEFIN	ROLLER	400	2-1/2-130-532		
3	1 13/16	POLYOLEFIN	ROLLER	500	3-130-532	4	2 3/8
		PHENOLIC	ROLLER	500	3-130-222		

Rigid Top Plate

3	1 13/16	POLYOLEFIN	ROLLER	500	3-131-532	4	N/A
		PHENOLIC	ROLLER	500	3-131-222		N/A

Spring Ring Stem

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Stem Model Number	Load Height (Inches)	Swivel Radius (Inches)
2-1/2	1 13/16	PHENOLIC	ROLLER	400	2-1/2-134-222	3 1/2	2 1/8
		POLYOLEFIN	PLAIN	400	2-1/2-134-531	3 1/2	2 1/8
		POLYOLEFIN	ROLLER	400	2-1/2-134-532	3 1/2	2 1/8
3	1 13/16	POLYOLEFIN	ROLLER	500	3-134-532	3 53/64	2 3/8
		PHENOLIC	ROLLER	500	3-134-222	3 53/64	2 3/8

Stem Size: 7/8" diameter x 2-3/16" long

Threaded Stem

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number	Load Height (Inches)	Swivel Radius (Inches)
2-1/2	1 13/16	PHENOLIC	ROLLER	400	2-1/2-136-222	3 3/4	2 1/8
		POLYOLEFIN	PLAIN	400	2-1/2-136-531	3 3/4	2 1/8
		POLYOLEFIN	ROLLER	400	2-1/2-136-532	3 3/4	2 1/8
3	1-13/16	POLYOLEFIN	ROLLER	500	3-136-532	3 7/8	2 3/8
		PHENOLIC	ROLLER	500	3-136-222	3 7/8	2 3/8

Stem Sizes: variety of stem sizes available – consult factory



3-130-532 PLT 2
(shown in photo)



3-131-532 PLT 5
(shown in photo)



3-134-222
(shown in photo)



3-136-532
(shown in photo)





Business Machine

Single Wide Wheel / Heavy Duty Capacity to 700 pounds each

FEATURES

- ✓ **Design:** low profile design for lower equipment height.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** durable double ball raceway.
- ✓ **Axle:** 3/8" diameter nut & bolt.

CASTER OPTIONS

- ✓  **Hex Head Brake:** to order, add "HHBRK" to end of caster model number.
- ✓  **Thumb Screw Brake:** to order, add "TSBRK" to end of caster model number.
- ✓ **Optional plates and stems:** wide variety available—consult factory.



3-61-532
(shown in photo)

Swivel Top Plate

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Plate Model Number	Load Height (Inches)	Swivel Radius (Inches)
3	1 13/16	POLYOLEFIN PHENOLIC	ROLLER ROLLER	500	3-61-532	4 5/16	3
				700	3-61-222		

Top Plate Size: 3-1/8" x 4-1/8" • **Bolt Hole Centers:** 2-3/8" x 3-3/8" •
Mounting Bolt Size: 3/8" diameter



3-62-532
(shown in photo)

Rigid Top Plate

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Rigid Plate Model Number	Load Height (Inches)	Swivel Radius (Inches)
3	1 13/16	POLYOLEFIN PHENOLIC	ROLLER ROLLER	500	3-62-532	4 5/16	N/A
				700	3-62-222		

Top Plate Size: 3-1/8" x 4-1/8" • **Bolt Hole Centers:** 2-3/8" x 3-3/8" •
Mounting Bolt Size: 3/8" diameter

BUSINESS MACHINE

13 Series

Threaded Stem

Capacity to 160 pounds each

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 5/16" diameter bolt with lock nut.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-135-103)
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



5-13-433 STEM 1
(shown in photo)

MOUNTING OPTIONS

Standard Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 5-13-212G STEM 1).

Mounting Code	Stem Sizes
STEM 1	3/8" diameter - 16 x 1-1/2" long
STEM 2	7/16" diameter - 14 x 1-1/2" long
STEM 3	1/2" diameter - 13 x 1" long
STEM 4	1/2" diameter - 13 x 1-1/2" long
STEM 5	1/2" diameter - 13 x 2-3/4" long

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	15/16	CUSHION / SOLID RUBBER	DELIN	100	3-13-103	1-1/8	3 5/8	2 3/4
		CUSHION GREY RUBBER W/ SIDE PLATES	DELIN	100	3-13-433G			
		TPR TREAD / POLY CORE	PLAIN	125	3-13-201G			
		HARD / SOLID RUBBER	DELIN	125	3-13-104			
	1 1/8	POLYOLEFIN	PLAIN	125	3-13-511			
4	15/16	CUSHION / SOLID RUBBER	DELIN	115	4-13-103	1-1/2	4 5/8	3 5/16
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELIN	115	4-13-433			
		TPR TREAD / POLY CORE	PLAIN	125	4-13-201G			
		HARD / SOLID RUBBER	DELIN	140	4-13-104			
	1	POLYOLEFIN	PLAIN	150	4-13-511			
		POLYLOC / GREY	DELIN	150	4-13-211G			
		POLYLOC / GREY	BALL	150	4-13-212G			
		POLYLOC / BLUE	BALL	150	4-13-212P			
5	15/16	CUSHION / SOLID RUBBER	DELIN	125	5-13-103	1-7/8	5 5/8	4
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELIN	125	5-13-433			
		TPR TREAD/ POLY CORE	PLAIN	150	5-13-201G			
		HARD / SOLID RUBBER	DELIN	150	5-13-104			
	1	POLYOLEFIN	PLAIN	150	5-13-511			
		POLYLOC / GREY	DELIN	160	5-13-211G			
		POLYLOC / GREY	BALL	160	5-13-212G			
		POLYLOC / BLUE	BALL	160	5-13-212P			



14 Series

Spring Ring Stem


Capacity to 160 pounds each

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 5/16" diameter bolt with lock nut.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-145-103)
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



5-14-212P STEM 1
(shown in photo)

MOUNTING OPTIONS

Standard Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 5-14-212G **STEM 1**).

Machined stems available from 1/2" to 1" diameter—consult factory.

Square stems available with drilled holes in sizes .845", .860", .875"—consult factory.

Mounting Code	Stem Sizes
STEM 1	7/16" diameter x 1- 3/8" long
STEM 2	7/16" diameter x 1- 15/16" long

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Ring Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	15/16	CUSHION / SOLID RUBBER	DELRIN	100	3-14-103	1-1/8	3 5/8	2 3/4
		CUSHION GREY RUBBER W/ SIDE PLATES	DELRIN	100	3-14-433G			
		TPR TREAD/ POLY	PLAIN	125	3-14-201G			
		HARD / SOLID RUBBER	DELRIN	125	3-14-104			
	1 1/8	POLYOLEFIN	PLAIN	125	3-14-511			
4	15/16	CUSHION / SOLID RUBBER	DELRIN	115	4-14-103	1-1/2	4 5/8	3 5/16
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	115	4-14-433			
		TPR TREAD/ POLY	PLAIN	125	4-14-201G			
		HARD / SOLID RUBBER	DELRIN	140	4-14-104			
	1	POLYOLEFIN	PLAIN	150	4-14-511			
		POLYLOC / GREY	DELRIN	150	4-14-211G			
		POLYLOC / GREY	BALL	150	4-14-212G			
		POLYLOC / BLUE	BALL	150	4-14-212P			
5	15/16	CUSHION / SOLID RUBBER	DELRIN	125	5-14-103	1-7/8	5 5/8	4
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	125	5-14-433			
		TPR TREAD/ POLY	PLAIN	125	5-14-201G			
		HARD / SOLID RUBBER	DELRIN	150	5-14-104			
	1	POLYOLEFIN	PLAIN	150	5-14-511			
		POLYLOC / GREY	DELRIN	160	5-14-211G			
		POLYLOC / GREY	BALL	160	5-14-212G			
		POLYLOC / BLUE	BALL	160	5-14-212P			

14 SERIES

17 Series

Pipe Thread Stem

Capacity to 160 pounds each


FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 5/16" diameter bolt with lock nut.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-175-103)

- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



5-17-511
(shown in photo)

MOUNTING OPTIONS

Standard Stem Size:
3/4" pipe thread (1" actual stem diameter).

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Pipe Thread Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	15/16	CUSHION / SOLID RUBBER	DELRIN	100	3-17-103	1-1/8	3 5/8	2 3/4
		CUSHION GREY RUBBER W/ SIDE PLATES	DELRIN	100	3-17-433G			
		TPR TREAD / POLY	PLAIN	125	3-17-201G			
		HARD / SOLID RUBBER	DELRIN	125	3-17-104			
	1 1/8	POLYOLEFIN	PLAIN	125	3-17-511			
4	15/16	CUSHION / SOLID RUBBER	DELRIN	115	4-17-103	1-1/2	4 5/8	3 5/16
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	115	4-17-433			
		TPR TREAD / POLY	PLAIN	125	4-17-201G			
		HARD / SOLID RUBBER	DELRIN	140	4-17-104			
	1	POLYOLEFIN	PLAIN	150	4-17-511			
		POLYLOC / GREY	DELRIN	150	4-17-211G			
		POLYLOC / GREY	BALL	150	4-17-212G			
		POLYLOC / BLUE	BALL	150	4-17-212P			
5	15/16	CUSHION / SOLID RUBBER	DELRIN	125	5-17-103	1-7/8	5 5/8	4
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	125	5-17-433			
		TPR TREAD / POLY	PLAIN	125	5-17-201G			
		HARD / SOLID RUBBER	DELRIN	150	5-17-104			
	1	POLYOLEFIN	PLAIN	150	5-17-511			
		POLYLOC / GREY	DELRIN	160	5-17-211G			
		POLYLOC / GREY	BALL	160	5-17-212G			
		POLYLOC / BLUE	BALL	160	5-17-212P			



19 Series

Octagon Stem

Capacity to 160 pounds each

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 5/16" diameter bolt with lock nut.

CASTER OPTIONS


- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-195-103)
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



5-19-212G
(shown in photo)

MOUNTING OPTIONS

Standard Octagon Stem Size:
3/4" octagon x 2" long with three cross drilled mounting holes 1/4" diameter.

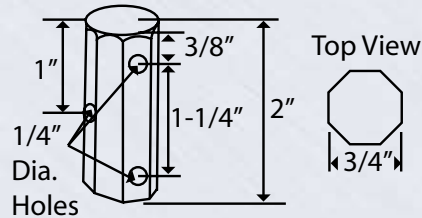

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Octagon Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	15/16	CUSHION / SOLID RUBBER	DELRIN	100	3-19-103	1-1/8	3 5/8	2 3/4
		CUSHION GREY RUBBER W/ SIDE PLATES	DELRIN	100	3-19-433G			
		TPR TREAD / POLY	PLAIN	125	3-19-201G			
		HARD / SOLID RUBBER	DELRIN	125	3-19-104			
	1 1/8	POLYOLEFIN	PLAIN	125	3-19-511			
4	15/16	CUSHION / SOLID RUBBER	DELRIN	115	4-19-103	1-1/2	4 5/8	3 5/16
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	115	4-19-433			
		TPR TREAD / POLY	PLAIN	125	4-19-201G			
		HARD / SOLID RUBBER	DELRIN	140	4-19-104			
		POLYOLEFIN	PLAIN	150	4-19-511			
	1	POLYLOC / GREY	DELRIN	150	4-19-211G			
		POLYLOC / GREY	BALL	150	4-19-212G			
		POLYLOC / BLUE	BALL	150	4-19-212P			
5	15/16	CUSHION / SOLID RUBBER	DELRIN	125	5-19-103	1-7/8	5 5/8	4
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	125	5-19-433			
		TPR TREAD / POLY	PLAIN	125	5-19-201G			
		HARD / SOLID RUBBER	DELRIN	150	5-19-104			
		POLYOLEFIN	PLAIN	150	5-19-511			
	1	POLYLOC / GREY	DELRIN	160	5-19-211G			
		POLYLOC / GREY	BALL	160	5-19-212G			
		POLYLOC / BLUE	BALL	160	5-19-212P			

19 SERIES

25 Series

Swivel & Rigid Top Plate

Capacity to 160 pounds each

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 5/16" diameter bolt with lock nut.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-255-103)
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



5-26-212P PLT 4
(shown in photo)

5-25-103 PLT 4
(shown in photo)

MOUNTING OPTIONS

Top Plate Sizes: to order, add Plate Mounting Code to end of model number. (Example: 5-25-103 PLT 1). Note: Rigid casters available in PLT 4 only.

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 1	2-7/16" x 2-7/16"	1-3/4" x 1-3/4"	1/4"
PLT 2	1-3/4" x 3"	1" x 2-1/4"	1/4"
PLT 4	2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	15/16	CUSHION / SOLID RUBBER	DELRIN	100	3-25-103	3-26-103	1-1/8	3 7/8	2 3/4
		CUSHION GREY RUBBER W/ SIDE PLATES	DELRIN	100	3-25-433G	3-26-433G			
		TPR TREAD / POLY	PLAIN	125	3-25-201G	3-26-201G			
		HARD / SOLID RUBBER	DELRIN	125	3-25-104	3-26-104			
	1 1/8	POLYOLEFIN	PLAIN	125	3-25-511	3-26-511			
4	15/16	CUSHION / SOLID RUBBER	DELRIN	115	4-25-103	4-26-103	1-1/2	4 3/4	3 5/16
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	115	4-25-433	4-26-433			
		TPR TREAD / POLY	PLAIN	125	4-25-201G	4-26-201G			
		HARD / SOLID RUBBER	DELRIN	140	4-25-104	4-26-104			
	1	POLYOLEFIN	PLAIN	150	4-25-511	4-26-511			
		POLYLOC / GREY	DELRIN	150	4-25-211G	4-26-211G			
		POLYLOC / GREY	BALL	150	4-25-212G	4-26-212G			
		POLYLOC / BLUE	BALL	150	4-25-212P	4-26-212P			
5	15/16	CUSHION / SOLID RUBBER	DELRIN	125	5-25-103	5-26-103	1-7/8	5 7/8	4
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	125	5-25-433	5-26-433			
		TPR TREAD / POLY	PLAIN	125	5-25-201G	5-26-201G			
		HARD / SOLID RUBBER	DELRIN	150	5-25-104	5-26-104			
		POLYOLEFIN	PLAIN	150	5-25-511	5-26-511			
	1	POLYLOC / GREY	DELRIN	160	5-25-211G	5-26-211G			
		POLYLOC / GREY	BALL	160	5-25-212G	5-26-212G			
		POLYLOC / BLUE	BALL	160	5-25-212P	5-26-212P			



27 Series

Expanding Adapter Stem

Capacity to 160 pounds each



5-27-433 19A
(shown in photo)

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 5/16" diameter bolt with lock nut.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-275-103)
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



MOUNTING OPTIONS

Rubber bushing expands inside of tubing as hex shaped lower raceway is turned with wrench. Plastic bushing on bottom of stem provides stability for stem inside of tubing for tight, permanent fit.

See chart at right for adapter sizes and matching tube sizes. To order, add adapter number to end of model number (example: 5-27-103 19A).

Threaded stem size (less adapter): 1/2" diameter x 2- 3/4" long.

Adapter Number	Tubing I.D. (inches)
9	3/4"
11	7/8"
13	1"
15	1-1/8"
17 B	1-3/16"
19 C	1-3/8"
19 A	1-1/2"
21	1-7/8"

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Expanding Adapter Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	15/16	CUSHION / SOLID RUBBER	DELRIN	100	3-27-103	1-1/8	3 5/8	2 3/4
		CUSHION GREY RUBBER W/ SIDE PLATES	DELRIN	100	3-27-433G			
		TPR TREAD / POLY	PLAIN	125	3-27-201G			
		HARD / SOLID RUBBER	DELRIN	125	3-27-104			
	1 1/8	POLYOLEFIN	PLAIN	125	3-27-511			
4	15/16	CUSHION / SOLID RUBBER	DELRIN	115	4-27-103	1-1/2	4 5/8	3 5/16
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	115	4-27-433			
		TPR TREAD / POLY	PLAIN	125	4-27-201G			
		HARD / SOLID RUBBER	DELRIN	140	4-27-104			
	1	POLYOLEFIN	PLAIN	150	4-27-511			
		POLYLOC / GREY	DELRIN	150	4-27-211G			
		POLYLOC / GREY	BALL	150	4-27-212G			
		POLYLOC / BLUE	BALL	150	4-27-212P			
5	15/16	CUSHION / SOLID RUBBER	DELRIN	125	5-27-103	1-7/8	5 5/8	4
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	125	5-27-433			
		TPR TREAD / POLY	PLAIN	125	5-27-201G			
		HARD / SOLID RUBBER	DELRIN	150	5-27-104			
	1	POLYOLEFIN	PLAIN	150	5-27-511			
		POLYLOC / GREY	DELRIN	160	5-27-211G			
		POLYLOC / GREY	BALL	160	5-27-212G			
		POLYLOC / BLUE	BALL	160	5-27-212P			

27 SERIES



28 Series

Hollow Kingpin

Capacity to 160 pounds each

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 5/16" diameter bolt with lock nut.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-285-103)

- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.




5-28-212G
(shown in photo)

MOUNTING OPTIONS

Hollow kingpin casters are designed to accept a 3/8" diameter bolt or other stem type.

WHEEL OPTIONS

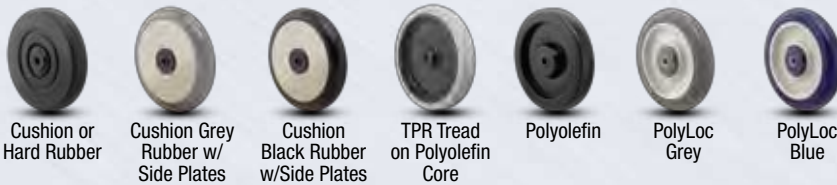

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Hollow Kingpin Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	15/16	CUSHION / SOLID RUBBER	DELRIN	100	3-28-103	1-1/8	3 5/8	2 3/4
		CUSHION GREY RUBBER W/ SIDE PLATES	DELRIN	100	3-28-433G			
		TPR TREAD / POLY	PLAIN	125	3-28-201G			
		HARD / SOLID RUBBER	DELRIN	125	3-28-104			
	1 1/8	POLYOLEFIN	PLAIN	125	3-28-511			
4	15/16	CUSHION / SOLID RUBBER	DELRIN	115	4-28-103	1-1/2	4 5/8	3 5/16
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	115	4-28-433			
		TPR TREAD / POLY	PLAIN	125	4-28-201G			
		HARD / SOLID RUBBER	DELRIN	140	4-28-104			
	1	POLYOLEFIN	PLAIN	150	4-28-511			
		POLYLOC / GREY	DELRIN	150	4-28-211G			
		POLYLOC / GREY	BALL	150	4-28-212G			
		POLYLOC / BLUE	BALL	150	4-28-212P			
5	15/16	CUSHION / SOLID RUBBER	DELRIN	125	5-28-103	1-7/8	5 5/8	4
		CUSHION BLACK RUBBER W/ SIDE PLATES	DELRIN	125	5-28-433			
		TPR TREAD / POLY	PLAIN	125	5-28-201G			
		HARD / SOLID RUBBER	DELRIN	150	5-28-104			
	1	POLYOLEFIN	PLAIN	150	5-28-511			
		POLYLOC / GREY	DELRIN	160	5-28-211G			
		POLYLOC / GREY	BALL	160	5-28-212G			
		POLYLOC / BLUE	BALL	160	5-28-212P			

W 13 Series

Threaded Stem

Capacity to 220 pounds each

NEW



5-W13-105 STEM 1
(shown in photo)

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.


CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-W135-103)

- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models).



- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



MOUNTING OPTIONS

Standard Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 5-W13-213G **STEM 1**).

Mounting Code	Stem Sizes
STEM 1	3/8" diameter - 16 x 1-1/2" long
STEM 2	7/16" diameter - 14 x 1-1/2" long
STEM 3	1/2" diameter - 13 x 1" long
STEM 4	1/2" diameter - 13 x 1-1/2" long
STEM 5	1/2" diameter - 13 x 2-3/4" long

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)	
3	1 1/4	CUSHION RUBBER	DELRIN	110	3-W13-105	1-3/4	3 5/8	2 3/4	
		CUSHION RUBBER	BALL	110	3-W13-152	1-3/4			
		HARD RUBBER	DELRIN	160	3-W13-106	1-3/4			
		HARD RUBBER	BALL	160	3-W13-162	1-3/4			
		POLYOLEFIN	PLAIN	180	3-W13-521	1-3/4			
	1 1/2	PHENOLIC	PLAIN	220	3-W13-121	1-3/4			
4	1 1/4	CUSHION RUBBER	DELRIN	120	4-W13-105	2-3/8	4 5/8	3 5/16	
		CUSHION RUBBER W/ SIDE PLATES	BALL	120	4-W13-452	2-3/8			
		WELDED DISC / BLACK RUBBER	BALL	150	4-W13-113	2-1/2			
		WELDED DISC / GREY RUBBER	BALL	150	4-W13-113G	2-1/2			
		HARD RUBBER	DELRIN	180	4-W13-106	2-3/8			
		HARD RUBBER W/ SIDE PLATES	BALL	180	4-W13-462	2-3/8			
		ADVANTAGE TPR / ROUND	DELRIN	180	4-W13-314GD	2-1/2			
		ADVANTAGE TPR / ROUND	BALL	180	4-W13-213GD	2-1/2			
		WELDED DISC / POLYURETHANE	BALL	200	4-W13-113P	2-1/2			
		POLYLOC / GREY	BALL	200	4-W13-213G	2-1/2			
		POLYLOC / GREY	DELRIN	200	4-W13-314G	2-1/2			
		POLYLOC / BLUE	BALL	200	4-W13-213P	2-1/2			
		POLYOLEFIN	PLAIN	200	4-W13-513	2-1/2			
	1 1/2	PHENOLIC	PLAIN	220	4-W13-121	2-1/2			
5	1 1/4	CUSHION RUBBER	DELRIN	150	5-W13-105	2-3/4	5 5/8	4	
		CONDUCTIVE CUSHION RUBBER	SINTERED	150	5-W13-105C	2-3/4			
		CUSHION RUBBER	BALL	150	5-W13-152	2-3/4			
		CUSHION RUBBER W/ SIDE PLATES	BALL	150	5-W13-452	2-3/4			
		WELDED DISC / BLACK RUBBER	BALL	150	5-W13-113	3			
		WELDED DISC / GREY RUBBER	BALL	150	5-W13-113G	3			
		ADVANTAGE TPR / ROUND	DELRIN	180	5-W13-314GD	3			
		ADVANTAGE TPR / ROUND	BALL	180	5-W13-213GD	3			
		HARD RUBBER	DELRIN	200	5-W13-106	2-3/4			
		HARD RUBBER	BALL	200	5-W13-162	2-3/4			
		HARD RUBBER W/ SIDE PLATES	BALL	220	5-W13-462	2-3/4			
		WELDED DISC / POLYURETHANE	BALL	220	5-W13-113P	3			
		POLYLOC / GREY	BALL	220	5-W13-213G	3			
		POLYLOC / GREY	DELRIN	220	5-W13-314G	3			
		POLYLOC / BLUE	BALL	220	5-W13-213P	3			
		POLYOLEFIN	PLAIN	220	5-W13-513	3			
		POLYOLEFIN	BALL	220	5-W13-514	3			
		ADVANTAGE TPR / FLAT	DELRIN	220	5-W13-314GF	3			
		ADVANTAGE TPR / FLAT	BALL	220	5-W13-213GF	3			
		1 1/2	PHENOLIC	PLAIN	220	5-W13-121			3

W 13 SERIES

W14 Series

Spring Ring Stem

Capacity to 220 pounds each

NEW





5-W14-213GD STEM 1
(shown in photo)

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-W145-103)
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models). 
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number. 

MOUNTING OPTIONS

Standard Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 5-W14-213GD **STEM 1**).

Machined stems available from 1/2" to 1" diameter—consult factory.

Square stems available with drilled holes in sizes .845", .860", .875"—consult factory.

Mounting Code	Stem Sizes
STEM 1	7/16" diameter x 1- 3/8" long
STEM 2	7/16" diameter x 1- 15/16" long

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Ring Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/4	CUSHION RUBBER	DELRIN	110	3-W14-105	1-3/4	3 5/8	2 3/4
		CUSHION RUBBER	BALL	110	3-W14-152	1-3/4		
		HARD RUBBER	DELRIN	160	3-W14-106	1-3/4		
		HARD RUBBER	BALL	160	3-W14-162	1-3/4		
		POLYOLEFIN	PLAIN	180	3-W14-521	1-3/4		
	1 1/2	PHENOLIC	PLAIN	220	3-W14-121	1-3/4		
4	1 1/4	CUSHION RUBBER	DELRIN	120	4-W14-105	2-3/8	4 5/8	3 5/16
		CUSHION RUBBER W/ SIDE PLATES	BALL	120	4-W14-452	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	150	4-W14-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	150	4-W14-113G	2-1/2		
		HARD RUBBER	DELRIN	180	4-W14-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES	BALL	180	4-W14-462	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	180	4-W14-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	180	4-W14-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	200	4-W14-113P	2-1/2		
		POLYLOC / GREY	BALL	200	4-W14-213G	2-1/2		
		POLYLOC / GREY	DELRIN	200	4-W14-314G	2-1/2		
		POLYLOC / BLUE	BALL	200	4-W14-213P	2-1/2		
		POLYOLEFIN	PLAIN	200	4-W14-513	2-1/2		
		ADVANTAGE TPR / FLAT	DELRIN	220	4-W14-314GF	2-1/2		
		ADVANTAGE TPR / FLAT	BALL	220	4-W14-213GF	2-1/2		
	1 1/2	PHENOLIC	PLAIN	220	4-W14-121	2-1/2		
5	1 1/4	CUSHION RUBBER	DELRIN	150	5-W14-105	2-3/4	5 5/8	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	150	5-W14-105C	2-3/4		
		CUSHION RUBBER	BALL	150	5-W14-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES	BALL	150	5-W14-452	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	150	5-W14-113	3		
		WELDED DISC / GREY RUBBER	BALL	150	5-W14-113G	3		
		ADVANTAGE TPR / ROUND	DELRIN	180	5-W14-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	180	5-W14-213GD	3		
		HARD RUBBER	DELRIN	200	5-W14-106	2-3/4		
		HARD RUBBER	BALL	200	5-W14-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES	BALL	220	5-W14-462	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	220	5-W14-113P	3		
		POLYLOC / GREY	BALL	220	5-W14-213G	3		
		POLYLOC / GREY	DELRIN	220	5-W14-314G	3		
		POLYLOC / BLUE	BALL	220	5-W14-213P	3		
		POLYOLEFIN	PLAIN	220	5-W14-513	3		
		POLYOLEFIN	BALL	220	5-W14-514	3		
		ADVANTAGE TPR / FLAT	DELRIN	220	5-W14-314GF	3		
		ADVANTAGE TPR / FLAT	BALL	220	5-W14-213GF	3		
		1 1/2	PHENOLIC	PLAIN	220	5-W14-121		

W14 SERIES



W17 Series

Pipe Thread Stem

Capacity to 220 pounds each



5-W17-213P STEM 2
(shown in photo)

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-W175-103)
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models).
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



MOUNTING OPTIONS

Standard Stem Size: 3/4" pipe thread
(1" actual stem diameter).

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Pipe Thread Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/4	CUSHION RUBBER	DELRIN	110	3-W17-105	1-3/4	3 5/8	2 3/4
	1 1/2	PHENOLIC	PLAIN	220	3-W17-121	1-3/4		
4	1 1/4	CUSHION RUBBER	DELRIN	120	4-W17-105	2-3/8	4 5/8	3 5/16
		CUSHION RUBBER W/ SIDE PLATES	BALL	120	4-W17-452	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	150	4-W17-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	150	4-W17-113G	2-1/2		
		HARD RUBBER	DELRIN	180	4-W17-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES	BALL	180	4-W17-462	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	180	4-W17-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	180	4-W17-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	200	4-W17-113P	2-1/2		
		POLYLOC / GREY	BALL	200	4-W17-213G	2-1/2		
		POLYLOC / GREY	DELRIN	200	4-W17-314G	2-1/2		
		POLYLOC / BLUE	BALL	200	4-W17-213P	2-1/2		
		POLYOLEFIN	PLAIN	200	4-W17-513	2-1/2		
	1 1/2	PHENOLIC	PLAIN	220	4-W17-121	2-1/2		
5	1 1/4	CUSHION RUBBER	DELRIN	150	5-W17-105	2-3/4	5 5/8	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	150	5-W17-105C	2-3/4		
		CUSHION RUBBER	BALL	150	5-W17-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES	BALL	150	5-W17-452	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	150	5-W17-113	3		
		WELDED DISC / GREY RUBBER	BALL	150	5-W17-113G	3		
		ADVANTAGE TPR / ROUND	DELRIN	180	5-W17-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	180	5-W17-213GD	3		
		HARD RUBBER	DELRIN	200	5-W17-106	2-3/4		
		HARD RUBBER	BALL	200	5-W17-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES	BALL	220	5-W17-462	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	220	5-W17-113P	3		
		POLYLOC / GREY	BALL	220	5-W17-213G	3		
		POLYLOC / GREY	DELRIN	220	5-W17-314G	3		
		POLYLOC / BLUE	BALL	220	5-W17-213P	3		
		POLYOLEFIN	PLAIN	220	5-W17-513	3		
		POLYOLEFIN	BALL	220	5-W17-514	3		
		ADVANTAGE TPR / FLAT	DELRIN	220	5-W17-314GF	3		
		ADVANTAGE TPR / FLAT	BALL	220	5-W17-213GF	3		
	1 1/2	PHENOLIC	PLAIN	220	5-W17-121	3		

W17 SERIES



W 19 Series

Octagon Stem

Capacity to 220 pounds each

NEW



5-W19-213GD
(shown in photo)

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.

CASTER OPTIONS


- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-W195-103)

- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models).




2-1/2" wheel models).

- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



MOUNTING OPTIONS

Standard Octagon Stem Size: 3/4" octagon x 2" long with three cross drilled mounting holes 1/4" diameter.

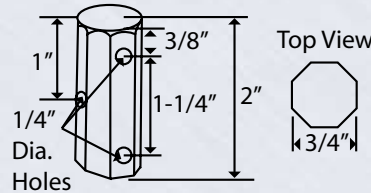

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Octagon Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/4	CUSHION RUBBER	DELIN	110	3-W19-105	1-3/4	3 5/8	2 3/4
		CUSHION RUBBER	BALL	110	3-W19-152	1-3/4		
		HARD RUBBER	DELIN	160	3-W19-106	1-3/4		
		HARD RUBBER	BALL	160	3-W19-162	1-3/4		
		POLYOLEFIN	PLAIN	180	3-W19-521	1-3/4		
	PHENOLIC	PLAIN	220	3-W19-121	1-3/4			
4	1 1/4	CUSHION RUBBER	DELIN	120	4-W19-105	2-3/8	4 5/8	3 5/16
		CUSHION RUBBER W/ SIDE PLATES	BALL	120	4-W19-452	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	150	4-W19-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	150	4-W19-113G	2-1/2		
		HARD RUBBER	DELIN	180	4-W19-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES	BALL	180	4-W19-462	2-3/8		
		ADVANTAGE TPR / ROUND	DELIN	180	4-W19-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	180	4-W19-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	200	4-W19-113P	2-1/2		
		POLYLOC / GREY	BALL	200	4-W19-213G	2-1/2		
		POLYLOC / GREY	DELIN	200	4-W19-314G	2-1/2		
		POLYLOC / BLUE	BALL	200	4-W19-213P	2-1/2		
		POLYOLEFIN	PLAIN	200	4-W19-513	2-1/2		
		ADVANTAGE TPR / FLAT	DELIN	220	4-W19-314GF	2-1/2		
	ADVANTAGE TPR / FLAT	BALL	220	4-W19-213GF	2-1/2			
1 1/2	PHENOLIC	PLAIN	220	4-W19-121	2-1/2			
5	1 1/4	CUSHION RUBBER	DELIN	150	5-W19-105	2-3/4	5 5/8	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	150	5-W19-105C	2-3/4		
		CUSHION RUBBER	BALL	150	5-W19-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES	BALL	150	5-W19-452	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	150	5-W19-113	3		
		WELDED DISC / GREY RUBBER	BALL	150	5-W19-113G	3		
		ADVANTAGE TPR / ROUND	DELIN	180	5-W19-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	180	5-W19-213GD	3		
		HARD RUBBER	DELIN	200	5-W19-106	2-3/4		
		HARD RUBBER	BALL	200	5-W19-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES	BALL	220	5-W19-462	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	220	5-W19-113P	3		
		POLYLOC / GREY	BALL	220	5-W19-213G	3		
		POLYLOC / GREY	DELIN	220	5-W19-314G	3		
		POLYLOC / BLUE	BALL	220	5-W19-213P	3		
		POLYOLEFIN	PLAIN	220	5-W19-513	3		
		POLYOLEFIN	BALL	220	5-W19-514	3		
		ADVANTAGE TPR / FLAT	DELIN	220	5-W19-314GF	3		
		ADVANTAGE TPR / FLAT	BALL	220	5-W19-213GF	3		
		1 1/2	PHENOLIC	PLAIN	220	5-W19-121		

W 19 SERIES



W25 Series

Swivel Top Plate

Capacity to 220 pounds each

NEW



5-W25-513 PLT 2
(shown in photo)

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-W255-103)
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models).
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



MOUNTING OPTIONS

Top Plate Sizes: to order, add Plate Mounting Code to end of model number. (Example: 5-W25-103 **PLT 2**). Note: Rigid casters available in **PLT 4** only.

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 1	2-7/16" x 2-7/16"	1-3/4" x 1-3/4"	1/4"
PLT 2	1-3/4" x 3"	1" x 2-1/4"	1/4"
PLT 4	2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Top Plate Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/4	CUSHION RUBBER	DELRIN	110	3-W25-105	1-3/4	4 1/8	3
		CUSHION RUBBER	BALL	110	3-W25-152	1-3/4		
		HARD RUBBER	DELRIN	160	3-W25-106	1-3/4		
		HARD RUBBER	BALL	160	3-W25-162	1-3/4		
		POLYOLEFIN	PLAIN	180	3-W25-521	1-3/4		
	PHENOLIC	PLAIN	220	3-W25-121	1-3/4			
4	1 1/4	CUSHION RUBBER	DELRIN	120	4-W25-105	2-3/8	5 1/8	3 1/2
		CUSHION RUBBER W/ SIDE PLATES	BALL	120	4-W25-452	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	150	4-W25-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	150	4-W25-113G	2-1/2		
		HARD RUBBER	DELRIN	180	4-W25-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES	BALL	180	4-W25-462	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	180	4-W25-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	180	4-W25-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	200	4-W25-113P	2-1/2		
		POLYLOC / GREY	BALL	200	4-W25-213G	2-1/2		
		POLYLOC / GREY	DELRIN	200	4-W25-314G	2-1/2		
		POLYLOC / BLUE	BALL	200	4-W25-213P	2-1/2		
		POLYOLEFIN	PLAIN	200	4-W25-513	2-1/2		
		ADVANTAGE TPR / FLAT	DELRIN	220	4-W25-314GF	2-1/2		
	ADVANTAGE TPR / FLAT	BALL	220	4-W25-213GF	2-1/2			
1 1/2	PHENOLIC	PLAIN	220	4-W25-121	2-1/2			
5	1 1/4	CUSHION RUBBER	DELRIN	150	5-W25-105	2-3/4	6 1/4	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	150	5-W25-105C	2-3/4		
		CUSHION RUBBER	BALL	150	5-W25-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES	BALL	150	5-W25-452	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	150	5-W25-113	3		
		WELDED DISC / GREY RUBBER	BALL	150	5-W25-113G	3		
		ADVANTAGE TPR / ROUND	DELRIN	180	5-W25-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	180	5-W25-213GD	3		
		HARD RUBBER	DELRIN	200	5-W25-106	2-3/4		
		HARD RUBBER	BALL	200	5-W25-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES	BALL	220	5-W25-462	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	220	5-W25-113P	3		
		POLYLOC / GREY	BALL	220	5-W25-213G	3		
		POLYLOC / GREY	DELRIN	220	5-W25-314G	3		
		POLYLOC / BLUE	BALL	220	5-W25-213P	3		
		POLYOLEFIN	PLAIN	220	5-W25-513	3		
		POLYOLEFIN	BALL	220	5-W25-514	3		
		ADVANTAGE TPR / FLAT	DELRIN	220	5-W25-314GF	3		
		ADVANTAGE TPR / FLAT	BALL	220	5-W25-213GF	3		
		1 1/2	PHENOLIC	PLAIN	220	5-W25-121		

W 25 SERIES



W27 Series

Expanding Adapter Stem

Capacity to 220 pounds each



5-W27-121 9
(shown in photo)

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.

CASTER OPTIONS

✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-W275-103)

✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models).



✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



MOUNTING OPTIONS

Rubber bushing expands inside of tubing as hex shaped lower raceway is turned with wrench. Plastic bushing on bottom of stem provides stability for stem inside of tubing for tight, permanent fit.

See chart at right for adapter sizes and matching tube sizes. To order, add adapter number to end of model number (example: 5-W27-105 9).

Threaded stem size (less adapter): 1/2" diameter x 2- 3/4" long.

Adapter Number	Tubing I.D. (inches)
9	3/4"
11	7/8"
13	1"
15	1-1/8"
17 B	1-3/16"
19 C	1-3/8"
19 A	1-1/2"
21	1-7/8"

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Expanding Adapter Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/4	CUSHION RUBBER	DELRIN	110	3-W27-105	1-3/4	3 5/8	2 3/4
		CUSHION RUBBER	BALL	110	3-W27-152	1-3/4		
		HARD RUBBER	DELRIN	160	3-W27-106	1-3/4		
		HARD RUBBER	BALL	160	3-W27-162	1-3/4		
		POLYOLEFIN	PLAIN	180	3-W27-521	1-3/4		
	1 1/2	PHENOLIC	PLAIN	220	3-W27-121	1-3/4		
4	1 1/4	CUSHION RUBBER	DELRIN	120	4-W27-105	2-3/8	4 5/8	3 5/16
		CUSHION RUBBER W/ SIDE PLATES	BALL	120	4-W27-452	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	150	4-W27-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	150	4-W27-113G	2-1/2		
		HARD RUBBER	DELRIN	180	4-W27-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES	BALL	180	4-W27-462	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	180	4-W27-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	180	4-W27-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	200	4-W27-113P	2-1/2		
		POLYLOC / GREY	BALL	200	4-W27-213G	2-1/2		
		POLYLOC / GREY	DELRIN	200	4-W27-314G	2-1/2		
		POLYLOC / BLUE	BALL	200	4-W27-213P	2-1/2		
		POLYOLEFIN	PLAIN	200	4-W27-513	2-1/2		
	ADVANTAGE TPR / FLAT	DELRIN	220	4-W27-314GF	2-1/2			
ADVANTAGE TPR / FLAT	BALL	220	4-W27-213GF	2-1/2				
1 1/2	PHENOLIC	PLAIN	220	4-W27-121	2-1/2			
5	1 1/4	CUSHION RUBBER	DELRIN	150	5-W27-105	2-3/4	5 5/8	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	150	5-W27-105C	2-3/4		
		CUSHION RUBBER	BALL	150	5-W27-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES	BALL	150	5-W27-452	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	150	5-W27-113	3		
		WELDED DISC / GREY RUBBER	BALL	150	5-W27-113G	3		
		ADVANTAGE TPR / ROUND	DELRIN	180	5-W27-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	180	5-W27-213GD	3		
		HARD RUBBER	DELRIN	200	5-W27-106	2-3/4		
		HARD RUBBER	BALL	200	5-W27-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES	BALL	220	5-W27-462	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	220	5-W27-113P	3		
		POLYLOC / GREY	BALL	220	5-W27-213G	3		
		POLYLOC / GREY	DELRIN	220	5-W27-314G	3		
		POLYLOC / BLUE	BALL	220	5-W27-213P	3		
		POLYOLEFIN	PLAIN	220	5-W27-513	3		
		POLYOLEFIN	BALL	220	5-W27-514	3		
		ADVANTAGE TPR / FLAT	DELRIN	220	5-W27-314GF	3		
		ADVANTAGE TPR / FLAT	BALL	220	5-W27-213GF	3		
		1 1/2	PHENOLIC	PLAIN	220	5-W27-121		

W 27 SERIES



W28 Series

Hollow Kingpin


Capacity to 220 pounds each

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number. (Example: 5-W285-103)
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models).
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



NEW



5-W28-105C
(shown in photo)

MOUNTING OPTIONS

Hollow kingpin casters are designed to accept a 3/8" diameter bolt or other stem type.

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Hollow Kingpin Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/4	CUSHION RUBBER	DELRIN	110	3-W28-105	1-3/4	3 5/8	2 3/4
		CUSHION RUBBER	BALL	110	3-W28-152	1-3/4		
		HARD RUBBER	DELRIN	160	3-W28-106	1-3/4		
		HARD RUBBER	BALL	160	3-W28-162	1-3/4		
		POLYOLEFIN	PLAIN	180	3-W28-521	1-3/4		
	1 1/2	PHENOLIC	PLAIN	220	3-W28-121	1-3/4		
4	1 1/4	CUSHION RUBBER	DELRIN	120	4-W28-105	2-3/8	4 5/8	3 5/16
		CUSHION RUBBER W/ SIDE PLATES	BALL	120	4-W28-452	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	150	4-W28-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	150	4-W28-113G	2-1/2		
		HARD RUBBER	DELRIN	180	4-W28-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES	BALL	180	4-W28-462	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	180	4-W28-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	180	4-W28-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	200	4-W28-113P	2-1/2		
		POLYLOC / GREY	BALL	200	4-W28-213G	2-1/2		
		POLYLOC / GREY	DELRIN	200	4-W28-314G	2-1/2		
		POLYLOC / BLUE	BALL	200	4-W28-213P	2-1/2		
		POLYOLEFIN	PLAIN	200	4-W28-513	2-1/2		
		ADVANTAGE TPR / FLAT	DELRIN	220	4-W28-314GF	2-1/2		
	ADVANTAGE TPR / FLAT	BALL	220	4-W28-213GF	2-1/2			
1 1/2	PHENOLIC	PLAIN	220	4-W28-121	2-1/2			
5	1 1/4	CUSHION RUBBER	DELRIN	150	5-W28-105	2-3/4	5 5/8	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	150	5-W28-105C	2-3/4		
		CUSHION RUBBER	BALL	150	5-W28-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES	BALL	150	5-W28-452	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	150	5-W28-113	3		
		WELDED DISC / GREY RUBBER	BALL	150	5-W28-113G	3		
		ADVANTAGE TPR / ROUND	DELRIN	180	5-W28-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	180	5-W28-213GD	3		
		HARD RUBBER	DELRIN	200	5-W28-106	2-3/4		
		HARD RUBBER	BALL	200	5-W28-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES	BALL	220	5-W28-462	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	220	5-W28-113P	3		
		POLYLOC / GREY	BALL	220	5-W28-213G	3		
		POLYLOC / GREY	DELRIN	220	5-W28-314G	3		
		POLYLOC / BLUE	BALL	220	5-W28-213P	3		
		POLYOLEFIN	PLAIN	220	5-W28-513	3		
		POLYOLEFIN	BALL	220	5-W28-514	3		
		ADVANTAGE TPR / FLAT	DELRIN	220	5-W28-314GF	3		
		ADVANTAGE TPR / FLAT	BALL	220	5-W28-213GF	3		
	1 1/2	PHENOLIC	PLAIN	220	5-W28-121	3		

W 28 SERIES



30 Series





Swivel & Rigid Top Plate

Capacity to 325 pounds each

FEATURES

- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.
- ✓ **King Pin:** 1/2" steel rivet, hydraulically upset.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number (Example: 5-305-105). **Other finishes available**, see page 15.
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models). 
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number (not available on 2-1/2" wheel models). 
- ✓ **Swivel Lock:** Locks caster in trailing position at 180° while wheel spins freely. To order specify "1PSL". 
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels—consult factory.
- ✓ **Swivel Grease Seal:** Includes zerk grease fitting in dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.



5-31-105C PLT2
(shown in photo)

5-30-213GF PLT2
(shown in photo)

MOUNTING OPTIONS

Top Plate Sizes (swivel & rigid): to order, add Plate Mounting Code to end of model number (Example: 5-30-105 PLT 1)

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 1	2-3/8" x 3-5/8"	1-3/4" x 3"	1/4"
PLT 2	2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"
PLT 3	3-1/8" x 4-1/8"	2-3/8" x 3-7/16"	5/16"
PLT 4	4" x 4"	3" x 3"	3/8"
PLT 5	3-3/4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"
PLT 7	3-1/2" x 3-1/2"	2-5/8" x 2-5/8"	9/32"

Note: PLT 4 and PLT 5 rigid casters are two piece welded design. Consult factory.

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
2 1/2	1 1/4	CUSHION RUBBER	DELRIN	140	2-1/2-30-105	2-1/2-31-105	1-11/16	3 5/8	2 3/4
		HARD RUBBER	DELRIN	210	2-1/2-30-106	2-1/2-31-106	1-11/16		
		POLYOLEFIN	PLAIN	210	2-1/2-30-513	2-1/2-31-513	1-11/16		
3	1 1/4	CUSHION RUBBER	DELRIN	150	3-30-105	3-31-105	1-3/4	4 1/8	3
		CUSHION RUBBER	BALL	150	3-30-152	3-31-152	1-3/4		
		HARD RUBBER	DELRIN	220	3-30-106	3-31-106	1-3/4		
		HARD RUBBER	BALL	220	3-30-162	3-31-162	1-3/4		
		POLYOLEFIN	PLAIN	250	3-30-521	3-31-521	1-3/4		
	PHENOLIC	PLAIN	300	3-30-121	3-31-121	1-3/4			
1 1/2	PHENOLIC	PLAIN	300	3-30-121	3-31-121	1-3/4			

NEW



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3 1/2	1 1/4	CUSHION RUBBER	DELTRIN	160	3-1/2-30-105	3-1/2-31-105	2	4 5/8	3 1/4
		CUSHION RUBBER W/ SIDE PLATES*	BALL	160	3-1/2-30-452*	3-1/2-31-452*	2		
		WELDED DISC / BLACK RUBBER	BALL	200	3-1/2-30-113	3-1/2-31-113	2-3/16		
		WELDED DISC / GREY RUBBER	BALL	225	3-1/2-30-113G	3-1/2-31-113G	2-3/16		
		ADVANTAGE TPR / ROUND	DELTRIN	225	3-1/2-30-314GD	3-1/2-31-314GD	2-3/16		
		ADVANTAGE TPR / ROUND	BALL	225	3-1/2-30-213GD	3-1/2-31-213GD	2-3/16		
		HARD RUBBER	DELTRIN	230	3-1/2-30-106	3-1/2-31-106	2		
		HARD RUBBER W/ SIDE PLATES*	BALL	230	3-1/2-30-462*	3-1/2-31-462*	2-3/16		
		POLYOLEFIN	PLAIN	250	3-1/2-30-513	3-1/2-31-513	2-3/16		
		HI-TEMP RESIN	PLAIN	250	3-1/2-30-521HTN	3-1/2-31-521HTN	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	250	3-1/2-30-113P	3-1/2-31-113P	2-3/16		
		ADVANTAGE TPR / FLAT	DELTRIN	250	3-1/2-30-314GF	3-1/2-31-314GF	2-3/16		
		ADVANTAGE TPR / FLAT	BALL	250	3-1/2-30-213GF	3-1/2-31-213GF	2-3/16		
		POLYLOC / GREY	BALL	250	3-1/2-30-213G	3-1/2-31-213G	2-3/16		
POLYLOC / GREY	DELTRIN	250	3-1/2-30-314G	3-1/2-31-314G	2-3/16				
POLYLOC / BLUE	BALL	250	3-1/2-30-213P	3-1/2-31-213P	2-3/16				
4	1 1/4	CUSHION RUBBER	DELTRIN	170	4-30-105	4-31-105	2-3/8	5 1/8	3 1/2
		CUSHION RUBBER W/ SIDE PLATES*	BALL	170	4-30-452*	4-31-452*	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	200	4-30-113	4-31-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	200	4-30-113G	4-31-113G	2-1/2		
		HARD RUBBER	DELTRIN	250	4-30-106	4-31-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES*	BALL	250	4-30-462*	4-31-462*	2-3/8		
		ADVANTAGE TPR / ROUND	DELTRIN	250	4-30-314GD	4-31-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	250	4-30-213GD	4-31-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	275	4-30-113P	4-31-113P	2-1/2		
		POLYLOC / GREY	BALL	275	4-30-213G	4-31-213G	2-1/2		
		POLYLOC / GREY	DELTRIN	275	4-30-314G	4-31-314G	2-1/2		
		POLYLOC / BLUE	BALL	275	4-30-213P	4-31-213P	2-1/2		
		POLYOLEFIN	PLAIN	275	4-30-513	4-31-513	2-1/2		
	ADVANTAGE TPR / FLAT	DELTRIN	300	4-30-314GF	4-31-314GF	2-1/2			
ADVANTAGE TPR / FLAT	BALL	300	4-30-213GF	4-31-213GF	2-1/2				
1 1/2	PHENOLIC	PLAIN	300	4-30-121	4-31-121	2-1/2			
	HI-TEMP RESIN	PLAIN	300	4-30-521HT	4-31-521HT	2-1/2			
5	1 1/4	CUSHION RUBBER	DELTRIN	200	5-30-105	5-31-105	2-3/4	6 1/4	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	200	5-30-105C	5-31-105C	2-3/4		
		CUSHION RUBBER	BALL	200	5-30-152	5-31-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES*	BALL	200	5-30-452*	5-31-452*	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	200	5-30-113	5-31-113	3		
		WELDED DISC / GREY RUBBER	BALL	200	5-30-113G	5-31-113G	3		
		ADVANTAGE TPR / ROUND	DELTRIN	250	5-30-314GD	5-31-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	250	5-30-213GD	5-31-213GD	3		
		HARD RUBBER	DELTRIN	280	5-30-106	5-31-106	2-3/4		
		HARD RUBBER	BALL	280	5-30-162	5-31-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES*	BALL	280	5-30-462*	5-31-462*	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	300	5-30-113P	5-31-113P	3		
		POLYLOC / GREY	BALL	300	5-30-213G	5-31-213G	3		
		POLYLOC / GREY	DELTRIN	300	5-30-314G	5-31-314G	3		
		POLYLOC / BLUE	BALL	300	5-30-213P	5-31-213P	3		
		POLYOLEFIN	PLAIN	300	5-30-513	5-31-513	3		
	POLYOLEFIN	BALL	300	5-30-514	5-31-514	3			
	ADVANTAGE TPR / FLAT	DELTRIN	325	5-30-314GF	5-31-314GF	3			
ADVANTAGE TPR / FLAT	BALL	325	5-30-213GF	5-31-213GF	3				
1 1/2	PHENOLIC	PLAIN	300	5-30-121	5-31-121	3			
	HI-TEMP RESIN	PLAIN	325	5-30-521NHT	5-31-521NHT	3			
6	1 1/4	CUSHION RUBBER	DELTRIN	220	6-30-105	6-31-105	3-1/8	7 1/4	4 1/2
		CONDUCTIVE CUSHION RUBBER	SINTERED	220	6-30-105C	6-31-105C	3-1/8		
		WELDED DISC / BLACK RUBBER	BALL	250	6-30-113	6-31-113	3-3/4		
		WELDED DISC / GREY RUBBER	BALL	250	6-30-113G	6-31-113G	3-3/4		
		HARD RUBBER	DELTRIN	300	6-30-106	6-31-106	3-1/8		
		HARD RUBBER	BALL	300	6-30-162	6-31-162	3-1/8		
		WELDED DISC / POLYURETHANE	BALL	300	6-30-113P	6-31-113P	3-3/4		
		ADVANTAGE TPR / ROUND	DELTRIN	300	6-30-314GD	6-31-314GD	3-3/4		
		ADVANTAGE TPR / ROUND	BALL	300	6-30-213GD	6-31-213GD	3-3/4		
		POLYLOC / GREY	BALL	300	6-30-213G	6-31-213G	3-3/4		
		POLYLOC / GREY	DELTRIN	300	6-30-314G	6-31-314G	3-3/4		
		POLYLOC / BLUE	BALL	300	6-30-213P	6-31-213P	3-3/4		
	1 1/2	PHENOLIC	PLAIN	300	6-30-121	6-31-121	3-3/4		
		POLYOLEFIN	PLAIN	300	6-30-521	6-31-521	3-3/4		

* Grey tread wheels are available (consult factory).

30 SERIES

32 Series




Octagon Stem

Capacity to 325 pounds each

FEATURES

- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.
- ✓ **King Pin:** 1/2" steel rivet, hydraulically upset.

CASTER OPTIONS


- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number (Example: 5-325-105). **Other finishes available**, see page 15.
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models). 
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number (not available on 2-1/2" wheel models). 
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels—consult factory.
- ✓ **Swivel Grease Seal:** Includes zerk grease fitting in dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.



5-32-213P
(shown in photo)

MOUNTING OPTIONS

Standard Octagon Stem Size: 3/4" octagon x 2" long with three cross drilled mounting holes

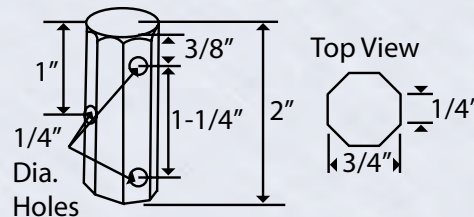

WHEEL OPTIONS



NEW

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Octagon Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
2 1/2	1 1/4	CUSHION RUBBER	DELRIN	140	2-1/2-32-105	1-11/16	3 7/16	2 3/4
		HARD RUBBER	DELRIN	210	2-1/2-32-106	1-11/16		
		POLYOLEFIN	PLAIN	210	2-1/2-32-513	1-11/16		
3	1 1/4	CUSHION RUBBER	DELRIN	150	3-32-105	1-3/4	3 15/16	3
		CUSHION RUBBER	BALL	150	3-32-152	1-3/4		
		HARD RUBBER	DELRIN	220	3-32-106	1-3/4		
		HARD RUBBER	BALL	220	3-32-162	1-3/4		
		POLYOLEFIN	PLAIN	250	3-32-521	1-3/4		
	PHENOLIC	PLAIN	300	3-32-121	1-3/4			
1 1/2	PHENOLIC	PLAIN	300	3-32-121	1-3/4			



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Octagon Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3 1/2	1 1/4	CUSHION RUBBER	DELRIN	160	3-1/2-32-105	2	4 7/16	3 1/4
		CUSHION RUBBER W/ SIDE PLATES*	BALL	160	3-1/2-32-452*	2		
		WELDED DISC / BLACK RUBBER	BALL	200	3-1/2-32-113	2-3/16		
		WELDED DISC / GREY RUBBER	BALL	225	3-1/2-32-113G	2-3/16		
		ADVANTAGE TPR / ROUND	DELRIN	225	3-1/2-32-314GD	2-3/16		
		ADVANTAGE TPR / ROUND	BALL	225	3-1/2-32-213GD	2-3/16		
		HARD RUBBER	DELRIN	230	3-1/2-32-106	2		
		HARD RUBBER W/ SIDE PLATES*	BALL	230	3-1/2-32-462*	2-3/16		
		POLYOLEFIN	PLAIN	250	3-1/2-32-513	2-3/16		
		HI-TEMP RESIN	PLAIN	250	3-1/2-32-521HTN	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	250	3-1/2-32-113P	2-3/16		
		ADVANTAGE TPR / FLAT	DELRIN	250	3-1/2-32-314GF	2-3/16		
		ADVANTAGE TPR / FLAT	BALL	250	3-1/2-32-213GF	2-3/16		
		POLYLOC / GREY	BALL	250	3-1/2-32-213G	2-3/16		
		POLYLOC / GREY	DELRIN	250	3-1/2-32-314G	2-3/16		
POLYLOC / BLUE	BALL	250	3-1/2-32-213P	2-3/16				
4	1 1/4	CUSHION RUBBER	DELRIN	170	4-32-105	2-3/8	4 15/16	3 1/2
		CUSHION RUBBER W/ SIDE PLATES*	BALL	170	4-32-452*	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	200	4-32-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	200	4-32-113G	2-1/2		
		HARD RUBBER	DELRIN	250	4-32-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES*	BALL	250	4-32-462*	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	250	4-32-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	250	4-32-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	275	4-32-113P	2-1/2		
		POLYLOC / GREY	BALL	275	4-32-213G	2-1/2		
		POLYLOC / GREY	DELRIN	275	4-32-314G	2-1/2		
		POLYLOC / BLUE	BALL	275	4-32-213P	2-1/2		
		POLYOLEFIN	PLAIN	275	4-32-513	2-1/2		
		ADVANTAGE TPR / FLAT	DELRIN	300	4-32-314GF	2-1/2		
		ADVANTAGE TPR / FLAT	BALL	300	4-32-213GF	2-1/2		
	1 1/2	PHENOLIC	PLAIN	300	4-32-121	2-1/2		
		HI-TEMP RESIN	PLAIN	300	4-32-521HT	2-1/2		
5	1 1/4	CUSHION RUBBER	DELRIN	200	5-32-105	2-3/4	6 1/16	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	200	5-32-105C	2-3/4		
		CUSHION RUBBER	BALL	200	5-32-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES*	BALL	200	5-32-452*	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	200	5-32-113	3		
		WELDED DISC / GREY RUBBER	BALL	200	5-32-113G	3		
		ADVANTAGE TPR / ROUND	DELRIN	250	5-32-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	250	5-32-213GD	3		
		HARD RUBBER	DELRIN	280	5-32-106	2-3/4		
		HARD RUBBER	BALL	280	5-32-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES*	BALL	280	5-32-462*	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	300	5-32-113P	3		
		POLYLOC / GREY	BALL	300	5-32-213G	3		
		POLYLOC / GREY	DELRIN	300	5-32-314G	3		
		POLYLOC / BLUE	BALL	300	5-32-213P	3		
		POLYOLEFIN	PLAIN	300	5-32-513	3		
		POLYOLEFIN	BALL	300	5-32-514	3		
	ADVANTAGE TPR / FLAT	DELRIN	325	5-32-314GF	3			
	ADVANTAGE TPR / FLAT	BALL	325	5-32-213GF	3			
	1 1/2	PHENOLIC	PLAIN	300	5-32-121	3		
HI-TEMP RESIN		PLAIN	325	5-32-521NHT	3			
6	1 1/4	CUSHION RUBBER	DELRIN	220	6-32-105	3-1/8	7 1/16	4 1/2
		CONDUCTIVE CUSHION RUBBER	SINTERED	220	6-32-105C	3-1/8		
		WELDED DISC / BLACK RUBBER	BALL	250	6-32-113	3-3/4		
		WELDED DISC / GREY RUBBER	BALL	250	6-32-113G	3-3/4		
		HARD RUBBER	DELRIN	300	6-32-106	3-1/8		
		HARD RUBBER	BALL	300	6-32-162	3-1/8		
		WELDED DISC / POLYURETHANE	BALL	300	6-32-113P	3-3/4		
		ADVANTAGE TPR / ROUND	DELRIN	300	6-32-314GD	3-3/4		
		ADVANTAGE TPR / ROUND	BALL	300	6-32-213GD	3-3/4		
		POLYLOC / GREY	BALL	300	6-32-213G	3-3/4		
		POLYLOC / GREY	DELRIN	300	6-32-314G	3-3/4		
		POLYLOC / BLUE	BALL	300	6-32-213P	3-3/4		
		1 1/2	PHENOLIC	PLAIN	300	6-32-121		
	POLYOLEFIN		PLAIN	300	6-32-521	3-3/4		

* Grey tread wheels are available (consult factory).

32 SERIES

34 Series




Spring Ring Stem

Capacity to 325 pounds each

FEATURES

- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.
- ✓ **King Pin:** 1/2" steel rivet, hydraulically upset.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number (Example: 5-345-105). **Other finishes available**, see page 15.
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models). 
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number (not available on 2-1/2" wheel models). 
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels—consult factory.
- ✓ **Swivel Grease Seal:** Includes zerk grease fitting in dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.



5-34-213GD STEM 1
(shown in photo)

MOUNTING OPTIONS

Standard Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 5-34-213G **STEM 1**).

Stem Code	Round Stem Sizes
STEM 1	3/4" diameter x 2-3/16" long
STEM 2	13/16" diameter x 2-3/16" long
STEM 3	.845" diameter x 2-3/16" long
STEM 4	.865" diameter x 2-3/16" long
STEM 5	1" diameter x 2-3/16" long

Stem Code	Square Stem Size
STEM 6	.860" SQUARE x 2-3/16" long

WHEEL OPTIONS



NEW

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Ring Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
2 1/2	1 1/4	CUSHION RUBBER	DEL RIN	140	2-1/2-34-105	1-11/16	3 7/16	2 3/4
		HARD RUBBER	DEL RIN	210	2-1/2-34-106	1-11/16		
		POLYOLEFIN	PLAIN	210	2-1/2-34-513	1-11/16		
3	1 1/4	CUSHION RUBBER	DEL RIN	150	3-34-105	1-3/4	3 15/16	3
		CUSHION RUBBER	BALL	150	3-34-152	1-3/4		
		HARD RUBBER	DEL RIN	220	3-34-106	1-3/4		
		HARD RUBBER	BALL	220	3-34-162	1-3/4		
		POLYOLEFIN	PLAIN	250	3-34-521	1-3/4		
	PHENOLIC	PLAIN	300	3-34-121	1-3/4			
1 1/2	PHENOLIC	PLAIN	300	3-34-121	1-3/4			



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Ring Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3 1/2	1 1/4	CUSHION RUBBER	DELRIN	160	3-1/2-34-105	2	4 7/16	3 1/4
		CUSHION RUBBER W/ SIDE PLATES*	BALL	160	3-1/2-34-452*	2		
		WELDED DISC / BLACK RUBBER	BALL	200	3-1/2-34-113	2-3/16		
		WELDED DISC / GREY RUBBER	BALL	225	3-1/2-34-113G	2-3/16		
		ADVANTAGE TPR / ROUND	DELRIN	225	3-1/2-34-314GD	2-3/16		
		ADVANTAGE TPR / ROUND	BALL	225	3-1/2-34-213GD	2-3/16		
		HARD RUBBER	DELRIN	230	3-1/2-34-106	2		
		HARD RUBBER W/ SIDE PLATES*	BALL	230	3-1/2-34-462*	2-3/16		
		POLYOLEFIN	PLAIN	250	3-1/2-34-513	2-3/16		
		HI-TEMP RESIN	PLAIN	250	3-1/2-34-521HTN	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	250	3-1/2-34-113P	2-3/16		
		ADVANTAGE TPR / FLAT	DELRIN	250	3-1/2-34-314GF	2-3/16		
		ADVANTAGE TPR / FLAT	BALL	250	3-1/2-34-213GF	2-3/16		
		POLYLOC / GREY	BALL	250	3-1/2-34-213G	2-3/16		
		POLYLOC / GREY	DELRIN	250	3-1/2-34-314G	2-3/16		
POLYLOC / BLUE	BALL	250	3-1/2-34-213P	2-3/16				
4	1 1/4	CUSHION RUBBER	DELRIN	170	4-34-105	2-3/8	4 15/16	3 1/2
		CUSHION RUBBER W/ SIDE PLATES*	BALL	170	4-34-452*	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	200	4-34-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	200	4-34-113G	2-1/2		
		HARD RUBBER	DELRIN	250	4-34-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES*	BALL	250	4-34-462*	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	250	4-34-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	250	4-34-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	275	4-34-113P	2-1/2		
		POLYLOC / GREY	BALL	275	4-34-213G	2-1/2		
		POLYLOC / GREY	DELRIN	275	4-34-314G	2-1/2		
		POLYLOC / BLUE	BALL	275	4-34-213P	2-1/2		
		POLYOLEFIN	PLAIN	275	4-34-513	2-1/2		
	ADVANTAGE TPR / FLAT	DELRIN	300	4-34-314GF	2-1/2			
	ADVANTAGE TPR / FLAT	BALL	300	4-34-213GF	2-1/2			
1 1/2	PHENOLIC	PLAIN	300	4-34-121	2-1/2			
	HI-TEMP RESIN	PLAIN	300	4-34-521HT	2-1/2			
5	1 1/4	CUSHION RUBBER	DELRIN	200	5-34-105	2-3/4	6 1/16	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	200	5-34-105C	2-3/4		
		CUSHION RUBBER	BALL	200	5-34-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES*	BALL	200	5-34-452*	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	200	5-34-113	3		
		WELDED DISC / GREY RUBBER	BALL	200	5-34-113G	3		
		ADVANTAGE TPR / ROUND	DELRIN	250	5-34-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	250	5-34-213GD	3		
		HARD RUBBER	DELRIN	280	5-34-106	2-3/4		
		HARD RUBBER	BALL	280	5-34-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES*	BALL	280	5-34-462*	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	300	5-34-113P	3		
		POLYLOC / GREY	BALL	300	5-34-213G	3		
		POLYLOC / GREY	DELRIN	300	5-34-314G	3		
		POLYLOC / BLUE	BALL	300	5-34-213P	3		
		POLYOLEFIN	PLAIN	300	5-34-513	3		
		POLYOLEFIN	BALL	300	5-34-514	3		
		ADVANTAGE TPR / FLAT	DELRIN	325	5-34-314GF	3		
	ADVANTAGE TPR / FLAT	BALL	325	5-34-213GF	3			
	1 1/2	PHENOLIC	PLAIN	300	5-34-121	3		
HI-TEMP RESIN		PLAIN	300	5-34-521NHT	3			
6	1 1/4	CUSHION RUBBER	DELRIN	220	6-34-105	3-1/8	7 1/16	4 1/2
		CONDUCTIVE CUSHION RUBBER	SINTERED	220	6-34-105C	3-1/8		
		WELDED DISC / BLACK RUBBER	BALL	250	6-34-113	3-3/4		
		WELDED DISC / GREY RUBBER	BALL	250	6-34-113G	3-3/4		
		HARD RUBBER	DELRIN	300	6-34-106	3-1/8		
		HARD RUBBER	BALL	300	6-34-162	3-1/8		
		WELDED DISC / POLYURETHANE	BALL	300	6-34-113P	3-3/4		
		ADVANTAGE TPR / ROUND	DELRIN	300	6-34-314GD	3-3/4		
		ADVANTAGE TPR / ROUND	BALL	300	6-34-213GD	3-3/4		
		POLYLOC / GREY	BALL	300	6-34-213G	3-3/4		
		POLYLOC / GREY	DELRIN	300	6-34-314G	3-3/4		
		POLYLOC / BLUE	BALL	300	6-34-213P	3-3/4		
		1 1/2	PHENOLIC	PLAIN	300	6-34-121		
	POLYOLEFIN		PLAIN	300	6-34-521	3-3/4		

* Grey tread wheels are available (consult factory).

34 SERIES

36 Series




Threaded Stem

Capacity to 325 pounds each

FEATURES

- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.
- ✓ **King Pin:** 1/2" steel rivet, hydraulically upset.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number (Example: 5-365-105). **Other finishes available**, see page 15.
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models).
 
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number (not available on 2-1/2" wheel models).
 
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels—consult factory.
- ✓ **Swivel Grease Seal:** Includes zerk grease fitting in dust cap. To order, add "GS" to end of model number.
 
- ✓ **Thread Guards:** See page 94 for thread guard availability.



5-36-113P STEM 2
(shown in photo)

MOUNTING OPTIONS

Standard Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 5-36-213G STEM 1).

Stem Code	Stem Sizes
STEM 1	1/2" diameter – 13 x 3/4" long
STEM 2	1/2" diameter – 13 x 1" long
STEM 3	1/2" diameter – 13 x 1-1/2" long
STEM 4	1/2" diameter – 20 x 3/4" long
STEM 5	1/2" diameter – 20 x 2-1/4" long
STEM 6	5/8" diameter – 11 x 1-1/4" long
STEM 7	5/8" diameter – 18 x 1-3/4" long
STEM 8	3/4" diameter – 10 x 1" long

WHEEL OPTIONS



NEW

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
2 1/2	1 1/4	CUSHION RUBBER	DELRIN	140	2-1/2-36-105	1-11/16	3 7/16	2 3/4
		HARD RUBBER	DELRIN	210	2-1/2-36-106	1-11/16		
		POLYOLEFIN	PLAIN	210	2-1/2-36-513	1-11/16		
3	1 1/4	CUSHION RUBBER	DELRIN	150	3-36-105	1-3/4	3 15/16	3
		CUSHION RUBBER	BALL	150	3-36-152	1-3/4		
		HARD RUBBER	DELRIN	220	3-36-106	1-3/4		
		HARD RUBBER	BALL	220	3-36-162	1-3/4		
		POLYOLEFIN	PLAIN	250	3-36-521	1-3/4		
	PHENOLIC	PLAIN	300	3-36-121	1-3/4			
1 1/2	PHENOLIC	PLAIN	300	3-36-121	1-3/4			



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3 1/2	1 1/4	CUSHION RUBBER	DELRIN	160	3-1/2-36-105	2	4 7/16	3 1/4
		CUSHION RUBBER W/ SIDE PLATES*	BALL	160	3-1/2-36-452*	2		
		WELDED DISC / BLACK RUBBER	BALL	200	3-1/2-36-113	2-3/16		
		WELDED DISC / GREY RUBBER	BALL	225	3-1/2-36-113G	2-3/16		
		ADVANTAGE TPR / ROUND	DELRIN	225	3-1/2-36-314GD	2-3/16		
		ADVANTAGE TPR / ROUND	BALL	225	3-1/2-36-213GD	2-3/16		
		HARD RUBBER	DELRIN	230	3-1/2-36-106	2		
		HARD RUBBER W/ SIDE PLATES*	BALL	230	3-1/2-36-462*	2-3/16		
		POLYOLEFIN	PLAIN	250	3-1/2-36-513	2-3/16		
		HI-TEMP RESIN	PLAIN	250	3-1/2-36-521HTN	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	250	3-1/2-36-113P	2-3/16		
		ADVANTAGE TPR / FLAT	DELRIN	250	3-1/2-36-314GF	2-3/16		
		ADVANTAGE TPR / FLAT	BALL	250	3-1/2-36-213GF	2-3/16		
		POLYLOC / GREY	BALL	250	3-1/2-36-213G	2-3/16		
		POLYLOC / GREY	DELRIN	250	3-1/2-36-314G	2-3/16		
POLYLOC / BLUE	BALL	250	3-1/2-36-213P	2-3/16				
4	1 1/4	CUSHION RUBBER	DELRIN	170	4-36-105	2-3/8	4 15/16	3 1/2
		CUSHION RUBBER W/ SIDE PLATES*	BALL	170	4-36-452*	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	200	4-36-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	200	4-36-113G	2-1/2		
		HARD RUBBER	DELRIN	250	4-36-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES*	BALL	250	4-36-462*	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	250	4-36-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	250	4-36-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	275	4-36-113P	2-1/2		
		POLYLOC / GREY	BALL	275	4-36-213G	2-1/2		
		POLYLOC / GREY	DELRIN	275	4-36-314G	2-1/2		
		POLYLOC / BLUE	BALL	275	4-36-213P	2-1/2		
		POLYOLEFIN	PLAIN	275	4-36-513	2-1/2		
	ADVANTAGE TPR / FLAT	DELRIN	300	4-36-314GF	2-1/2			
	ADVANTAGE TPR / FLAT	BALL	300	4-36-213GF	2-1/2			
1 1/2	PHENOLIC	PLAIN	300	4-36-121	2-1/2			
	HI-TEMP RESIN	PLAIN	300	4-36-521HT	2-1/2			
5	1 1/4	CUSHION RUBBER	DELRIN	200	5-36-105	2-3/4	6 1/16	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	200	5-36-105C	2-3/4		
		CUSHION RUBBER	BALL	200	5-36-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES*	BALL	200	5-36-452*	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	200	5-36-113	3		
		WELDED DISC / GREY RUBBER	BALL	200	5-36-113G	3		
		ADVANTAGE TPR / ROUND	DELRIN	250	5-36-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	250	5-36-213GD	3		
		HARD RUBBER	DELRIN	280	5-36-106	2-3/4		
		HARD RUBBER	BALL	280	5-36-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES*	BALL	280	5-36-462*	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	300	5-36-113P	3		
		POLYLOC / GREY	BALL	300	5-36-213G	3		
		POLYLOC / GREY	DELRIN	300	5-36-314G	3		
		POLYLOC / BLUE	BALL	300	5-36-213P	3		
	POLYOLEFIN	PLAIN	300	5-36-513	3			
	POLYOLEFIN	BALL	300	5-36-514	3			
	ADVANTAGE TPR / FLAT	DELRIN	325	5-36-314GF	3			
ADVANTAGE TPR / FLAT	BALL	325	5-36-213GF	3				
1 1/2	PHENOLIC	PLAIN	300	5-36-121	3			
	HI-TEMP RESIN	PLAIN	325	5-36-521NHT	3			
6	1 1/4	CUSHION RUBBER	DELRIN	220	6-36-105	3-1/8	7 1/16	4 1/2
		CONDUCTIVE CUSHION RUBBER	SINTERED	220	6-36-105C	3-1/8		
		WELDED DISC / BLACK RUBBER	BALL	250	6-36-113	3-3/4		
		WELDED DISC / GREY RUBBER	BALL	250	6-36-113G	3-3/4		
		HARD RUBBER	DELRIN	300	6-36-106	3-1/8		
		HARD RUBBER	BALL	300	6-36-162	3-1/8		
		WELDED DISC / POLYURETHANE	BALL	300	6-36-113P	3-3/4		
		ADVANTAGE TPR / ROUND	DELRIN	300	6-36-314GD	3-3/4		
		ADVANTAGE TPR / ROUND	BALL	300	6-36-213GD	3-3/4		
		POLYLOC / GREY	BALL	300	6-36-213G	3-3/4		
		POLYLOC / GREY	DELRIN	300	6-36-314G	3-3/4		
		POLYLOC / BLUE	BALL	300	6-36-213P	3-3/4		
		1 1/2	PHENOLIC	PLAIN	300	6-36-121		
	POLYOLEFIN		PLAIN	300	6-36-521	3-3/4		

* Grey tread wheels are available (consult factory).

36 SERIES

3S Series




Hollow Kingpin

Capacity to 325 pounds each

FEATURES

- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.
- ✓ **King Pin:** 1/2" hollow rivet, hydraulically upset.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number (Example: 5-3S5-105). **Other finishes available**, see page 15.
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models).
 
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number (not available on 2-1/2" wheel models).
 
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels—consult factory.
- ✓ **Swivel Grease Seal:** Includes zerk grease fitting in dust cap. To order, add "GS" to end of model number.
 
- ✓ **Thread Guards:** See page 94 for thread guard availability.



5-3S-314GF
(shown in photo)

MOUNTING OPTIONS

Hollow kingpin casters are designed to accept a 3/8" diameter bolt or other stem type.

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Hollow Kingpin Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
2 1/2	1 1/4	CUSHION RUBBER	DEL RIN	140	2-1/2-3S-105	1-11/16	3 7/16	2 3/4
		HARD RUBBER	DEL RIN	210	2-1/2-3S-106	1-11/16		
		POLYOLEFIN	PLAIN	210	2-1/2-3S-513	1-11/16		
3	1 1/4	CUSHION RUBBER	DEL RIN	150	3-3S-105	1-3/4	3 15/16	3
		CUSHION RUBBER	BALL	150	3-3S-152	1-3/4		
		HARD RUBBER	DEL RIN	220	3-3S-106	1-3/4		
		HARD RUBBER	BALL	220	3-3S-162	1-3/4		
		POLYOLEFIN	PLAIN	250	3-3S-521	1-3/4		
	PHENOLIC	PLAIN	300	3-3S-121	1-3/4			
1 1/2								

NEW



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Hollow Kingpin Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3 1/2	1 1/4	CUSHION RUBBER	DELRIN	160	3-1/2-3S-105	2	4 7/16	3 1/4
		CUSHION RUBBER W/ SIDE PLATES*	BALL	160	3-1/2-3S-452*	2		
		WELDED DISC / BLACK RUBBER	BALL	200	3-1/2-3S-113	2-3/16		
		WELDED DISC / GREY RUBBER	BALL	225	3-1/2-3S-113G	2-3/16		
		ADVANTAGE TPR / ROUND	DELRIN	225	3-1/2-3S-314GD	2-3/16		
		ADVANTAGE TPR / ROUND	BALL	225	3-1/2-3S-213GD	2-3/16		
		HARD RUBBER	DELRIN	230	3-1/2-3S-106	2		
		HARD RUBBER W/ SIDE PLATES*	BALL	230	3-1/2-3S-462*	2-3/16		
		POLYOLEFIN	PLAIN	250	3-1/2-3S-513	2-3/16		
		HI-TEMP RESIN	PLAIN	250	3-1/2-3S-521HTN	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	250	3-1/2-3S-113P	2-3/16		
		ADVANTAGE TPR / FLAT	DELRIN	250	3-1/2-3S-314GF	2-3/16		
		ADVANTAGE TPR / FLAT	BALL	250	3-1/2-3S-213GF	2-3/16		
		POLYLOC / GREY	BALL	250	3-1/2-3S-213G	2-3/16		
		POLYLOC / GREY	DELRIN	250	3-1/2-3S-314G	2-3/16		
POLYLOC / BLUE	BALL	250	3-1/2-3S-213P	2-3/16				
4	1 1/4	CUSHION RUBBER	DELRIN	170	4-3S-105	2-3/8	4 15/16	3 1/2
		CUSHION RUBBER W/ SIDE PLATES*	BALL	170	4-3S-452*	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	200	4-3S-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	200	4-3S-113G	2-1/2		
		HARD RUBBER	DELRIN	250	4-3S-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES*	BALL	250	4-3S-462*	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	250	4-3S-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	250	4-3S-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	275	4-3S-113P	2-1/2		
		POLYLOC / GREY	BALL	275	4-3S-213G	2-1/2		
		POLYLOC / GREY	DELRIN	275	4-3S-314G	2-1/2		
		POLYLOC / BLUE	BALL	275	4-3S-213P	2-1/2		
		POLYOLEFIN	PLAIN	275	4-3S-513	2-1/2		
	ADVANTAGE TPR / FLAT	DELRIN	300	4-3S-314GF	2-1/2			
	ADVANTAGE TPR / FLAT	BALL	300	4-3S-213GF	2-1/2			
1 1/2	PHENOLIC	PLAIN	300	4-3S-121	2-1/2			
	HI-TEMP RESIN	PLAIN	300	4-3S-521HT	2-1/2			
5	1 1/4	CUSHION RUBBER	DELRIN	200	5-3S-105	2-3/4	6 1/16	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	200	5-3S-105C	2-3/4		
		CUSHION RUBBER	BALL	200	5-3S-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES*	BALL	200	5-3S-452*	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	200	5-3S-113	3		
		WELDED DISC / GREY RUBBER	BALL	200	5-3S-113G	3		
		ADVANTAGE TPR / ROUND	DELRIN	250	5-3S-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	250	5-3S-213GD	3		
		HARD RUBBER	DELRIN	280	5-3S-106	2-3/4		
		HARD RUBBER	BALL	280	5-3S-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES*	BALL	280	5-3S-462*	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	300	5-3S-113P	3		
		POLYLOC / GREY	BALL	300	5-3S-213G	3		
		POLYLOC / GREY	DELRIN	300	5-3S-314G	3		
		POLYLOC / BLUE	BALL	300	5-3S-213P	3		
		POLYOLEFIN	PLAIN	300	5-3S-513	3		
		POLYOLEFIN	BALL	300	5-3S-514	3		
	ADVANTAGE TPR / FLAT	DELRIN	325	5-3S-314GF	3			
	ADVANTAGE TPR / FLAT	BALL	325	5-3S-213GF	3			
1 1/2	PHENOLIC	PLAIN	300	5-3S-121	3			
	HI-TEMP RESIN	PLAIN	325	5-3S-521NHT	3			
6	1 1/4	CUSHION RUBBER	DELRIN	220	6-3S-105	3-1/8	7 1/16	4 1/2
		CONDUCTIVE CUSHION RUBBER	SINTERED	220	6-3S-105C	3-1/8		
		WELDED DISC / BLACK RUBBER	BALL	250	6-3S-113	3-3/4		
		WELDED DISC / GREY RUBBER	BALL	250	6-3S-113G	3-3/4		
		HARD RUBBER	DELRIN	300	6-3S-106	3-1/8		
		HARD RUBBER	BALL	300	6-3S-162	3-1/8		
		WELDED DISC / POLYURETHANE	BALL	300	6-3S-113P	3-3/4		
		ADVANTAGE TPR / ROUND	DELRIN	300	6-3S-314GD	3-3/4		
		ADVANTAGE TPR / ROUND	BALL	300	6-3S-213GD	3-3/4		
		POLYLOC / GREY	BALL	300	6-3S-213G	3-3/4		
		POLYLOC / GREY	DELRIN	300	6-3S-314G	3-3/4		
		POLYLOC / BLUE	BALL	300	6-3S-213P	3-3/4		
	1 1/2	PHENOLIC	PLAIN	300	6-3S-121	3-3/4		
		POLYOLEFIN	PLAIN	300	6-3S-521	3-3/4		

* Grey tread wheels are available (consult factory).

3S SERIES

38 Series




Pipe Thread Stem

Capacity to 325 pounds each

FEATURES

- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.
- ✓ **King Pin:** 1/2" steel rivet, hydraulically upset.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number (Example: 5-385-105). **Other finishes available**, see page 15.
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models).
 
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number (not available on 2-1/2" wheel models).
 
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels—consult factory.
- ✓ **Swivel Grease Seal:** Includes zerk grease fitting in dust cap. To order, add "GS" to end of model number.
 
- ✓ **Thread Guards:** See page 94 for thread guard availability.



5-38-213G STEM2
(shown in photo)

MOUNTING OPTIONS

Standard Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 5-38-213G **STEM 1**).

Mounting Code	Stem Sizes
STEM 2	3/4" Pipe Thread (1" actual stem diameter)
STEM 3	1" Pipe Thread (1-1/4" actual stem diameter)
STEM 4	1-1/4" Pipe Thread (1-1/2" actual stem diameter)

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Pipe Thread Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
2 1/2	1 1/4	CUSHION RUBBER	DEL RIN	140	2-1/2-38-105	1-11/16	3 7/16	2 3/4
		HARD RUBBER	DEL RIN	210	2-1/2-38-106	1-11/16		
		POLYOLEFIN	PLAIN	210	2-1/2-38-513	1-11/16		
3	1 1/4	CUSHION RUBBER	DEL RIN	150	3-38-105	1-3/4	3 15/16	3
		CUSHION RUBBER	BALL	150	3-38-152	1-3/4		
		HARD RUBBER	DEL RIN	220	3-38-106	1-3/4		
		HARD RUBBER	BALL	220	3-38-162	1-3/4		
		HARD RUBBER	PLAIN	250	3-38-521	1-3/4		
	POLYOLEFIN	PLAIN	250	3-38-521	1-3/4			
1 1/2	PHENOLIC	PLAIN	300	3-38-121	1-3/4			



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Pipe Thread Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3 1/2	1 1/4	CUSHION RUBBER	DELRIN	160	3-1/2-38-105	2	4 7/16	3 1/4
		CUSHION RUBBER W/ SIDE PLATES*	BALL	160	3-1/2-38-452*	2		
		WELDED DISC / BLACK RUBBER	BALL	200	3-1/2-38-113	2-3/16		
		WELDED DISC / GREY RUBBER	BALL	225	3-1/2-38-113G	2-3/16		
		ADVANTAGE TPR / ROUND	DELRIN	225	3-1/2-38-314GD	2-3/16		
		ADVANTAGE TPR / ROUND	BALL	225	3-1/2-38-213GD	2-3/16		
		HARD RUBBER	DELRIN	230	3-1/2-38-106	2		
		HARD RUBBER W/ SIDE PLATES*	BALL	230	3-1/2-38-462*	2-3/16		
		POLYOLEFIN	PLAIN	250	3-1/2-38-513	2-3/16		
		HI-TEMP RESIN	PLAIN	250	3-1/2-38-521HTN	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	250	3-1/2-38-113P	2-3/16		
		ADVANTAGE TPR / FLAT	DELRIN	250	3-1/2-38-314GF	2-3/16		
		ADVANTAGE TPR / FLAT	BALL	250	3-1/2-38-213GF	2-3/16		
		POLYLOC / GREY	BALL	250	3-1/2-38-213G	2-3/16		
		POLYLOC / GREY	DELRIN	250	3-1/2-38-314G	2-3/16		
POLYLOC / BLUE	BALL	250	3-1/2-38-213P	2-3/16				

4	1 1/4	CUSHION RUBBER	DELRIN	170	4-38-105	2-3/8	4 15/16	3 1/2
		CUSHION RUBBER W/ SIDE PLATES*	BALL	170	4-38-452*	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	200	4-38-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	200	4-38-113G	2-1/2		
		HARD RUBBER	DELRIN	250	4-38-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES*	BALL	250	4-38-462*	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	250	4-38-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	250	4-38-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	275	4-38-113P	2-1/2		
		POLYLOC / GREY	BALL	275	4-38-213G	2-1/2		
		POLYLOC / GREY	DELRIN	275	4-38-314G	2-1/2		
		POLYLOC / BLUE	BALL	275	4-38-213P	2-1/2		
		POLYOLEFIN	PLAIN	275	4-38-513	2-1/2		
		ADVANTAGE TPR / FLAT	DELRIN	300	4-38-314GF	2-1/2		
	ADVANTAGE TPR / FLAT	BALL	300	4-38-213GF	2-1/2			
1 1/2	PHENOLIC	PLAIN	300	4-38-121	2-1/2			
HI-TEMP RESIN	PLAIN	300	4-38-521HT	2-1/2				

5	1 1/4	CUSHION RUBBER	DELRIN	200	5-38-105	2-3/4	6 1/16	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	200	5-38-105C	2-3/4		
		CUSHION RUBBER	BALL	200	5-38-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES*	BALL	200	5-38-452*	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	200	5-38-113	3		
		WELDED DISC / GREY RUBBER	BALL	200	5-38-113G	3		
		ADVANTAGE TPR / ROUND	DELRIN	250	5-38-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	250	5-38-213GD	3		
		HARD RUBBER	DELRIN	280	5-38-106	2-3/4		
		HARD RUBBER	BALL	280	5-38-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES*	BALL	280	5-38-462*	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	300	5-38-113P	3		
		POLYLOC / GREY	BALL	300	5-38-213G	3		
		POLYLOC / GREY	DELRIN	300	5-38-314G	3		
		POLYLOC / BLUE	BALL	300	5-38-213P	3		
		POLYOLEFIN	PLAIN	300	5-38-513	3		
		POLYOLEFIN	BALL	300	5-38-514	3		
		ADVANTAGE TPR / FLAT	DELRIN	325	5-38-314GF	3		
	ADVANTAGE TPR / FLAT	BALL	325	5-38-213GF	3			
	1 1/2	PHENOLIC	PLAIN	300	5-38-121	3		
HI-TEMP RESIN	PLAIN	325	5-38-521NHT	3				

6	1 1/4	CUSHION RUBBER	DELRIN	220	6-38-105	3-1/8	7 1/16	4 1/2
		CONDUCTIVE CUSHION RUBBER	SINTERED	220	6-38-105C	3-1/8		
		WELDED DISC / BLACK RUBBER	BALL	250	6-38-113	3-3/4		
		WELDED DISC / GREY RUBBER	BALL	250	6-38-113G	3-3/4		
		HARD RUBBER	DELRIN	300	6-38-106	3-1/8		
		HARD RUBBER	BALL	300	6-38-162	3-1/8		
		WELDED DISC / POLYURETHANE	BALL	300	6-38-113P	3-3/4		
		ADVANTAGE TPR / ROUND	DELRIN	300	6-38-314GD	3-3/4		
		ADVANTAGE TPR / ROUND	BALL	300	6-38-213GD	3-3/4		
		POLYLOC / GREY	BALL	300	6-38-213G	3-3/4		
		POLYLOC / GREY	DELRIN	300	6-38-314G	3-3/4		
		POLYLOC / BLUE	BALL	300	6-38-213P	3-3/4		
		1 1/2	PHENOLIC	PLAIN	300	6-38-121		
	POLYOLEFIN	PLAIN	300	6-38-521	3-3/4			

* Grey tread wheels are available (consult factory).

38 SERIES

40 Series




Expanding Adapter Stem

Capacity to 325 pounds each

FEATURES

- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.
- ✓ **King Pin:** 1/2" steel rivet, hydraulically upset.

CASTER OPTIONS

- ✓ **Bright Nickel Plating:** to order, add "5" to body of model number (Example: 5-405-105). **Other finishes available**, see page 15.
- ✓ **PosiLoc® Brake:** all stainless steel construction. To order, add "PL" to end of model number (not available on 2-1/2" wheel models). 
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number (not available on 2-1/2" wheel models). 
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels—consult factory.
- ✓ **Swivel Grease Seal:** Includes zerk grease fitting in dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.



5-40-452 19A
(shown in photo)

MOUNTING OPTIONS

Rubber bushing expands inside of tubing as 3/4" nut beneath lower raceway is turned with wrench. Plastic bushing on bottom of stem provides stability for stem inside of tubing for tight, permanent fit.

See chart at right for adapter sizes and matching tube sizes. To order, add adapter number to end of model number (example: 5-40-105 9).

Threaded stem size (less adapter): 1/2" diameter x 2- 3/4" long.

Adapter Number	Tubing I.D. (inches)
9	3/4"
11	7/8"
13	1"
15	1-1/8"
17 B	1-3/16"
19 C	1-3/8"
19 A	1-1/2"
21	1-7/8"

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Expanding Adapter Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
2 1/2	1 1/4	CUSHION RUBBER	DEL RIN	140	2-1/2-40-105	1-11/16	3 7/16	2 3/4
		HARD RUBBER	DEL RIN	210	2-1/2-40-106	1-11/16		
		POLYOLEFIN	PLAIN	210	2-1/2-40-513	1-11/16		
3	1 1/4	CUSHION RUBBER	DEL RIN	150	3-40-105	1-3/4	3 15/16	3
		CUSHION RUBBER	BALL	150	3-40-152	1-3/4		
		HARD RUBBER	DEL RIN	220	3-40-106	1-3/4		
		HARD RUBBER	BALL	220	3-40-162	1-3/4		
		POLYOLEFIN	PLAIN	250	3-40-521	1-3/4		
	PHENOLIC	PLAIN	300	3-40-121	1-3/4			
1 1/2								

NEW



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Expanding Adapter Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3 1/2	1 1/4	CUSHION RUBBER	DELRIN	160	3-1/2-40-105	2	4 7/16	3 1/4
		CUSHION RUBBER W/ SIDE PLATES*	BALL	160	3-1/2-40-452*	2		
		WELDED DISC / BLACK RUBBER	BALL	200	3-1/2-40-113	2-3/16		
		WELDED DISC / GREY RUBBER	BALL	225	3-1/2-40-113G	2-3/16		
		ADVANTAGE TPR / ROUND	DELRIN	225	3-1/2-40-314GD	2-3/16		
		ADVANTAGE TPR / ROUND	BALL	225	3-1/2-40-213GD	2-3/16		
		HARD RUBBER	DELRIN	230	3-1/2-40-106	2		
		HARD RUBBER W/ SIDE PLATES*	BALL	230	3-1/2-40-462*	2-3/16		
		POLYOLEFIN	PLAIN	250	3-1/2-40-513	2-3/16		
		HI-TEMP RESIN	PLAIN	250	3-1/2-40-521HTN	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	250	3-1/2-40-113P	2-3/16		
		ADVANTAGE TPR / FLAT	DELRIN	250	3-1/2-40-314GF	2-3/16		
		ADVANTAGE TPR / FLAT	BALL	250	3-1/2-40-213GF	2-3/16		
		POLYLOC / GREY	BALL	250	3-1/2-40-213G	2-3/16		
		POLYLOC / GREY	DELRIN	250	3-1/2-40-314G	2-3/16		
POLYLOC / BLUE	BALL	250	3-1/2-40-213P	2-3/16				
4	1 1/4	CUSHION RUBBER	DELRIN	170	4-40-105	2-3/8	4 15/16	3 1/2
		CUSHION RUBBER W/ SIDE PLATES*	BALL	170	4-40-452*	2-3/8		
		WELDED DISC / BLACK RUBBER	BALL	200	4-40-113	2-1/2		
		WELDED DISC / GREY RUBBER	BALL	200	4-40-113G	2-1/2		
		HARD RUBBER	DELRIN	250	4-40-106	2-3/8		
		HARD RUBBER W/ SIDE PLATES*	BALL	250	4-40-462*	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	250	4-40-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	250	4-40-213GD	2-1/2		
		WELDED DISC / POLYURETHANE	BALL	275	4-40-113P	2-1/2		
		POLYLOC / GREY	BALL	275	4-40-213G	2-1/2		
		POLYLOC / GREY	DELRIN	275	4-40-314G	2-1/2		
		POLYLOC / BLUE	BALL	275	4-40-213P	2-1/2		
		POLYOLEFIN	PLAIN	275	4-40-513	2-1/2		
	ADVANTAGE TPR / FLAT	DELRIN	300	4-40-314GF	2-1/2			
	ADVANTAGE TPR / FLAT	BALL	300	4-40-213GF	2-1/2			
1 1/2	PHENOLIC	PLAIN	300	4-40-121	2-1/2			
	HI-TEMP RESIN	PLAIN	300	4-40-521HT	2-1/2			
5	1 1/4	CUSHION RUBBER	DELRIN	200	5-40-105	2-3/4	6 1/16	4
		CONDUCTIVE CUSHION RUBBER	SINTERED	200	5-40-105C	2-3/4		
		CUSHION RUBBER	BALL	200	5-40-152	2-3/4		
		CUSHION RUBBER W/ SIDE PLATES*	BALL	200	5-40-452*	2-3/4		
		WELDED DISC / BLACK RUBBER	BALL	200	5-40-113	3		
		WELDED DISC / GREY RUBBER	BALL	200	5-40-113G	3		
		ADVANTAGE TPR / ROUND	DELRIN	250	5-40-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	250	5-40-213GD	3		
		HARD RUBBER	DELRIN	280	5-40-106	2-3/4		
		HARD RUBBER	BALL	280	5-40-162	2-3/4		
		HARD RUBBER W/ SIDE PLATES*	BALL	280	5-40-462*	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	300	5-40-113P	3		
		POLYLOC / GREY	BALL	300	5-40-213G	3		
		POLYLOC / GREY	DELRIN	300	5-40-314G	3		
		POLYLOC / BLUE	BALL	300	5-40-213P	3		
		POLYOLEFIN	PLAIN	300	5-40-513	3		
		POLYOLEFIN	BALL	300	5-40-514	3		
	ADVANTAGE TPR / FLAT	DELRIN	325	5-40-314GF	3			
	ADVANTAGE TPR / FLAT	BALL	325	5-40-213GF	3			
1 1/2	PHENOLIC	PLAIN	300	5-40-121	3			
	HI-TEMP RESIN	PLAIN	325	5-40-521NTH	3			
6	1 1/4	CUSHION RUBBER	DELRIN	220	6-40-105	3-1/8	7 1/16	4 1/2
		CONDUCTIVE CUSHION RUBBER	SINTERED	220	6-40-105C	3-1/8		
		WELDED DISC / BLACK RUBBER	BALL	250	6-40-113	3-3/4		
		WELDED DISC / GREY RUBBER	BALL	250	6-40-113G	3-3/4		
		HARD RUBBER	DELRIN	300	6-40-106	3-1/8		
		HARD RUBBER	BALL	300	6-40-162	3-1/8		
		WELDED DISC / POLYURETHANE	BALL	300	6-40-113P	3-3/4		
		ADVANTAGE TPR / ROUND	DELRIN	300	6-40-314GD	3-3/4		
		ADVANTAGE TPR / ROUND	BALL	300	6-40-213GD	3-3/4		
		POLYLOC / GREY	BALL	300	6-40-213G	3-3/4		
		POLYLOC / GREY	DELRIN	300	6-40-314G	3-3/4		
		POLYLOC / BLUE	BALL	300	6-40-213P	3-3/4		
		1 1/2	PHENOLIC	PLAIN	300	6-40-121		
	POLYOLEFIN		PLAIN	300	6-40-521	3-3/4		

* Grey tread wheels are available (consult factory).

40 SERIES

50 Series

Top Plate Total Lock • Swivel Lock

Capacity to 325 pounds each

FEATURES

- ✓ **Finish:** bright nickel plated for attractive appearance and rust and corrosion resistance.
- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.
- ✓ **King Pin:** 1/2" steel rivet, hydraulically upset.

CASTER OPTIONS

- ✓ **2-position and 4-position Swivel Locks:** available in 90° intervals – consult factory.
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels – consult factory.
- ✓ **Thread Guards:** See page 94 for thread guard availability.
- ✓ **Optional Top Plate Sizes:** variety of top plate sizes available – consult factory.
- ✓ **Grease Seal:** Upper raceway.



5-50-213GD TL
(shown in photo)

MOUNTING OPTIONS

Top Plate Sizes (swivel & rigid)

Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"



5-50-213GD TL (shown in photo)

Total Lock – simultaneously locks swivel and wheel in any position. Thermoplastic brake pedal is maintenance-free and provides positive locking force.

WHEEL OPTIONS



Cushion or Hard Rubber w/Side Plates

Advantage TPR Round

Advantage TPR Flat

Welded Disc Blue Poly, Black or Grey Rubber

PolyLoc Grey

PolyLoc Blue



5-50-213G SL1 (shown in photo)

Swivel Lock (1-position) – swivel locks in trailing position at 180° while wheel spins freely. Thermoplastic brake pedal is maintenance-free and provides positive locking force.

Total Lock & Swivel Lock Models

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Total Lock Model Number	Swivel Lock Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	1 1/4	WELDED DISC / GREY RUBBER	BALL	200	4-50-113G TL	4-50-113G SL1	2-3/4	5 1/8	3 3/4
		ADVANTAGE TPR / ROUND	BALL	250	4-50-213GD TL	4-50-213GD SL1	2-3/4		
		ADVANTAGE TPR / ROUND	DELTRIN	250	4-50-314GD TL	4-50-314GD SL1	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	275	4-50-113P TL	4-50-113P SL1	2-3/4		
		POLYLOC / GREY	BALL	275	4-50-213G TL	4-50-213G SL1	2-3/4		
		POLYLOC / BLUE	BALL	275	4-50-213P TL	4-50-213P SL1	2-3/4		
		ADVANTAGE TPR / FLAT	BALL	300	4-50-213GF TL	4-50-213GF SL1	2-3/4		
		ADVANTAGE TPR / FLAT	DELTRIN	300	4-50-314GF TL	4-50-314GFSL1	2-3/4		
5	1 1/4	CUSHION RUBBER W/ SIDE PLATES *	BALL	200	5-50-500 TL *	5-50-500 SL1 *	3	6 1/4	4 1/4
		WELDED DISC / GREY RUBBER	BALL	200	5-50-113G TL	5-50-113G SL1	3		
		ADVANTAGE TPR / ROUND	BALL	250	5-50-213GD TL	5-50-213GD SL1	3		
		ADVANTAGE TPR / ROUND	DELTRIN	250	5-50-314GD TL	5-50-314GD SL1	3		
		WELDED DISC / POLYURETHANE	BALL	300	5-50-113P TL	5-50-113P SL1	3		
		POLYLOC / GREY	BALL	300	5-50-213G TL	5-50-213G SL1	3		
		POLYLOC / BLUE	BALL	300	5-50-213P TL	5-50-213P SL1	3		
		ADVANTAGE TPR / FLAT	BALL	325	5-50-213GF TL	5-50-213GF SL1	3		
ADVANTAGE TPR / FLAT	DELTRIN	325	5-50-314GF TL	5-50-314GF SL1	3				
6	1 1/4	CUSHION RUBBER W/ SIDE PLATES *	BALL	220	6-50-500 TL *	6-50-500 SL1 *	3-1/2	7 1/4	4 3/4
		WELDED DISC / GREY RUBBER	BALL	250	6-50-113G TL	6-50-113G SL1	3-1/2		
		WELDED DISC / POLYURETHANE	BALL	300	6-50-113P TL	6-50-113P SL1	3-1/2		
		ADVANTAGE TPR / ROUND	BALL	300	6-50-213GD TL	6-50-213GD SL1	3-1/2		
		ADVANTAGE TPR / ROUND	DELTRIN	300	6-50-314GD TL	6-50-314GD SL1	3-1/2		
		POLYLOC / GREY	BALL	300	6-50-213G TL	6-50-213G SL1	3-1/2		
		POLYLOC / BLUE	BALL	300	6-50-213P TL	6-50-213P SL1	3-1/2		

* Grey tread wheels are available (consult factory).



54 Series

Round or Square Stem Total Lock • Swivel Lock

Capacity to 325 pounds each

FEATURES

- ✓ **Finish:** bright nickel plated for attractive appearance and rust and corrosion resistance.
- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.
- ✓ **King Pin:** 1/2" steel, hydraulically upset.

CASTER OPTIONS

- ✓ **2-position and 4-position Swivel Locks:** available in 90° intervals – consult factory.
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels – consult factory.
- ✓ **Thread Guards:** See page 94 for thread guard availability.
- ✓ **Optional Stem Sizes:** variety of top plate sizes available – consult factory.



5-54-213P SL1 STEM 1
(shown in photo -- round stem)

MOUNTING OPTIONS

Standard Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 5-54-213G STEM 1)

Stem Code	Stem Sizes
STEM 1	.845" diameter round x 2- 3/16" long
STEM 2	.865" diameter round x 2- 3/16" long
STEM 3	1" diameter round x 2- 3/16" long
STEM 4	.860 diameter SQUARE x 2- 3/16" long

WHEEL OPTIONS



Cushion or Hard Rubber w/Side Plates

Advantage TPR Round

Advantage TPR Flat

Welded Disc Blue Poly, Black or Grey Rubber

PolyLoc Grey

PolyLoc Blue



5-54-213GD TL STEM 1 (shown in photo)

Total Lock – simultaneously locks swivel and wheel in any position. Thermoplastic brake pedal is maintenance-free and provides positive locking force.



5-54-213P SL1 STEM 1 (shown in photo)

Swivel Lock (1-position) – swivel locks in trailing position at 180° while wheel spins freely. Thermoplastic brake pedal is maintenance-free and provides positive locking force.

Total Lock & Swivel Lock Models

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Total Lock Model Number	Swivel Lock Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	1 1/4	WELDED DISC / GREY RUBBER	BALL	200	4-54-113G TL	4-54-113G SL1	2-3/4	5	3 3/4
		ADVANTAGE TPR / ROUND	BALL	250	4-54-213GD TL	4-54-213GD SL1	2-3/4		
		ADVANTAGE TPR / ROUND	DELRIN	250	4-54-314GD TL	4-54-314GD SL1	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	275	4-54-113P TL	4-54-113P SL1	2-3/4		
		POLYLOC / GREY	BALL	275	4-54-213G TL	4-54-213G SL1	2-3/4		
		POLYLOC / BLUE	BALL	275	4-54-213P TL	4-54-213P SL1	2-3/4		
		ADVANTAGE TPR / FLAT	BALL	300	4-54-213GF TL	4-54-213GF SL1	2-3/4		
		ADVANTAGE TPR / FLAT	DELRIN	300	4-54-314GF TL	4-54-314GF SL1	2-3/4		
5	1 1/4	CUSHION RUBBER W/ SIDE PLATES *	BALL	200	5-54-500 TL *	5-54-500 SL1 *	3	6 1/16	4 1/4
		WELDED DISC / GREY RUBBER	BALL	200	5-54-113G TL	5-54-113G SL1	3		
		ADVANTAGE TPR / ROUND	BALL	250	5-54-213GD TL	5-54-213GD SL1	3		
		ADVANTAGE TPR / ROUND	DELRIN	250	5-54-314GD TL	5-54-314GD SL1	3		
		WELDED DISC / POLYURETHANE	BALL	300	5-54-113P TL	5-54-113P SL1	3		
		POLYLOC / GREY	BALL	300	5-54-213G TL	5-54-213G SL1	3		
		POLYLOC / BLUE	BALL	300	5-54-213P TL	5-54-213P SL1	3		
		ADVANTAGE TPR / FLAT	BALL	325	5-54-213GF TL	5-54-213GF SL1	3		
ADVANTAGE TPR / FLAT	DELRIN	325	5-54-314GF TL	5-54-314GF SL1	3				
6	1 1/4	CUSHION RUBBER W/ SIDE PLATES *	BALL	220	6-54-500 TL *	6-54-500 SL1 *	3-1/2	7 1/16	4 3/4
		WELDED DISC / GREY RUBBER	BALL	250	6-54-113G TL	6-54-113G SL1	3-1/2		
		WELDED DISC / POLYURETHANE	BALL	300	6-54-113P TL	6-54-113P SL1	3-1/2		
		ADVANTAGE TPR / ROUND	BALL	300	6-54-213GD TL	6-54-213GD SL1	3-1/2		
		ADVANTAGE TPR / ROUND	DELRIN	300	6-54-314GD TL	6-54-314GD SL1	3-1/2		
		POLYLOC / GREY	BALL	300	6-54-213G TL	6-54-213G SL1	3-1/2		
		POLYLOC / BLUE	BALL	300	6-54-213P TL	6-54-213P SL1	3-1/2		

* Grey tread wheels are available (consult factory).

56 Series

Threaded Stem Total Lock • Swivel Lock Capacity to 325 pounds each

FEATURES

- ✓ **Finish:** bright nickel plated for attractive appearance and rust and corrosion resistance.
- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter bolt with lock nut.
- ✓ **King Pin:** 1/2" steel, hydraulically upset.

CASTER OPTIONS

- ✓ **2-position and 4-position Swivel Locks:** available in 90° intervals – consult factory.
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels – consult factory.
- ✓ **Thread Guards:** See page 94 for thread guard availability.
- ✓ **Optional Stem Sizes:** variety of stem sizes available – consult factory.



5-56-213P TL STEM 1
(shown in photo)

MOUNTING OPTIONS

Standard Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 5-56-213G STEM 1).

Stem Code	Threaded Stem Sizes
STEM 1	1/2" diameter -13 x 1" long
STEM 2	1/2" diameter -13 x 1- 1/2" long
STEM 3	3/4" diameter-10 x 1-3/4" long



Total Lock – simultaneously locks swivel and wheel in any position. Thermoplastic brake pedal is maintenance-free and provides positive locking force.

5-56-213P TL STEM 1 (shown in photo)



Swivel Lock (1-position) – swivel locks in trailing position at 180° while wheel spins freely. Thermoplastic brake pedal is maintenance-free and provides positive locking force.

5-56-213GF SL1 STEM 1 (shown in photo)

WHEEL OPTIONS



Cushion or Hard Rubber w/Side Plates
Advantage TPR Round
Advantage TPR Flat
Welded Disc Blue Poly, Black or Grey Rubber
PolyLoc Grey
PolyLoc Blue

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Total Lock Model Number	Swivel Lock Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	1 1/4	WELDED DISC / GREY RUBBER	BALL	200	4-56-113G TL	4-56-113G SL1	2-3/4	5	3 3/4
		ADVANTAGE TPR / ROUND	BALL	250	4-56-213GD TL	4-56-213GD SL1	2-3/4		
		ADVANTAGE TPR / ROUND	DELRIN	250	4-56-314GD TL	4-56-314GD SL1	2-3/4		
		WELDED DISC / POLYURETHANE	BALL	275	4-56-113P TL	4-56-113P SL1	2-3/4		
		POLYLOC / GREY	BALL	275	4-56-213G TL	4-56-213G SL1	2-3/4		
		POLYLOC / BLUE	BALL	275	4-56-213P TL	4-56-213P SL1	2-3/4		
		ADVANTAGE TPR / FLAT	BALL	300	4-56-213GF TL	4-56-213GF SL1	2-3/4		
		ADVANTAGE TPR / FLAT	DELRIN	300	4-56-314GF TL	4-56-314GFSL1	2-3/4		
5	1 1/4	CUSHION RUBBER W/ SIDE PLATES *	BALL	200	5-56-500 TL *	5-56-500 SL1 *	3	6 1/16	4 1/4
		WELDED DISC / GREY RUBBER	BALL	200	5-56-113G TL	5-56-113G SL1	3		
		ADVANTAGE TPR / ROUND	BALL	250	5-56-213GD TL	5-56-213GD SL1	3		
		ADVANTAGE TPR / ROUND	DELRIN	250	5-56-314GD TL	5-56-314GD SL1	3		
		WELDED DISC / POLYURETHANE	BALL	300	5-56-113P TL	5-56-113P SL1	3		
		POLYLOC / GREY	BALL	300	5-56-213G TL	5-56-213G SL1	3		
		POLYLOC / BLUE	BALL	300	5-56-213P TL	5-56-213P SL1	3		
		ADVANTAGE TPR / FLAT	BALL	325	5-56-213GF TL	5-56-213GF SL1	3		
ADVANTAGE TPR / FLAT	DELRIN	325	5-56-314GF TL	5-56-314GF SL1	3				
6	1 1/4	CUSHION RUBBER W/ SIDE PLATES *	BALL	220	6-56-500 TL *	6-56-500 SL1 *	3-1/2	7 1/16	4 3/4
		WELDED DISC / GREY RUBBER	BALL	250	6-56-113G TL	6-56-113G SL1	3-1/2		
		WELDED DISC / POLYURETHANE	BALL	300	6-56-113P TL	6-56-113P SL1	3-1/2		
		ADVANTAGE TPR / ROUND	BALL	300	6-56-213GD TL	6-56-213GD SL1	3-1/2		
		ADVANTAGE TPR / ROUND	DELRIN	300	6-56-314GD TL	6-56-314GD SL1	3-1/2		
		POLYLOC / GREY	BALL	300	6-56-213G TL	6-56-213G SL1	3-1/2		
		POLYLOC / BLUE	BALL	300	6-56-213P TL	6-56-213P SL1	3-1/2		

* Grey tread wheels are available (consult factory).

www.jarviscaster.com • 1-800-995-9876



50N Series

Swivel & Rigid Top Plate
Swivel • Total Lock • Swivel Lock
 Capacity to 300 pounds each

FEATURES

- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Design:** heavy gauge cold rolled steel, formed for strength.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 3/8" diameter riveted nut and bolt.

CASTER OPTIONS

- ✓ **Total Lock** – simultaneously locks swivel and wheel in any position.



- ✓ **Swivel Lock (1-position)** – swivel locks in trailing position at 180° while wheel spins freely.



5-51N-213NF
(shown in photo)

5-50N-213NF
(shown in photo)

WHEEL OPTIONS



TPR Rubber Flat



Polyurethane Grey



Polyolefin

MOUNTING OPTIONS

Top Plate Sizes (swivel & rigid)

Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
2-3/4" x 3-3/4"	1-3/4" x 2-7/8" to 3"	5/16"

Swivel & Rigid Models

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/4	TPR / FLAT	PRECISION BALL	170	3-50N-213NF	3-51N-213NF	1-3/4	4 3/8	2 3/16
		TPR / FLAT	PLAIN	170	3-50N-314NF	3-51N-314NF	1-3/4		
		POLYURETHANE / GREY	PRECISION BALL	250	3-50N-213NG	3-51N-213NG	1-3/4		
		POLYURETHANE / GREY	PLAIN	250	3-50N-314NG	3-51N-314NG	1-3/4		
4	1 1/4	TPR / FLAT	PRECISION BALL	190	4-50N-213NF	4-51N-213NF	2-1/2	5 7/16	3 5/16
		TPR / FLAT	PLAIN	190	4-50N-314NF	4-51N-314NF	2-1/2		
		POLYURETHANE / GREY	PRECISION BALL	300	4-50N-213NG	4-51N-213NG	2-1/2		
		POLYURETHANE / GREY	PLAIN	300	4-50N-314NG	4-51N-314NG	2-1/2		
5	1 1/4	TPR / FLAT	PRECISION BALL	200	5-50N-213NF	5-51N-213NF	3	6 1/2	3 3/16
		TPR / FLAT	PLAIN	200	5-50N-314NF	5-51N-314NF	3		
		POLYOLEFIN	PLAIN	300	5-50N-513	5-51N-513	3		
		POLYURETHANE / GREY	PRECISION BALL	300	5-50N-213NG	5-51N-213NG	3		
		POLYURETHANE / GREY	PLAIN	300	5-50N-314NG	5-51N-314NG	3		

Total Lock & Swivel Lock Models

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Total Lock Model Number	Swivel Lock Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/4	TPR / FLAT	PRECISION BALL	170	3-50N-213NF TL	3-50N-213NF SL1	2	4 3/8	4 1/8
		TPR / FLAT	PLAIN	170	3-50N-314NF TL	3-50N-314NF SL1	2		
		POLYURETHANE / GREY	PRECISION BALL	250	3-50N-213NG TL	3-50N-213NG SL1	2		
		POLYURETHANE / GREY	PLAIN	250	3-50N-314NG TL	3-50N-314NG SL1	2		
4	1 1/4	TPR / FLAT	PRECISION BALL	190	4-50N-213NF TL	4-50N-213NF SL1	2-3/4	5 7/16	4 1/8
		TPR / FLAT	PLAIN	190	4-50N-314NF TL	4-50N-314NF SL1	2-3/4		
		POLYURETHANE / GREY	PRECISION BALL	300	4-50N-213NG TL	4-50N-213NG SL1	2-3/4		
		POLYURETHANE / GREY	PLAIN	300	4-50N-314NG TL	4-50N-314NG SL1	2-3/4		
5	1 1/4	TPR / FLAT	PRECISION BALL	200	5-50N-213NF TL	5-50N-213NF SL1	3-1/4	6 1/2	4 1/8
		TPR / FLAT	PLAIN	200	5-50N-314NF TL	5-50N-314NF SL1	3-1/4		
		POLYOLEFIN	PLAIN	300	5-50N-513 TL	5-50N-513 SL1	3-1/4		
		POLYURETHANE / GREY	PRECISION BALL	300	5-50N-213NG TL	5-50N-213NG SL1	3-1/4		
		POLYURETHANE / GREY	PLAIN	300	5-50N-314NG TL	5-50N-314NG SL1	3-1/4		

50N SERIES

50MG Series

Futura™ Thermoplastic Casters
Swivel • Total Lock • Swivel Lock
Capacity to 250 pounds each

FEATURES

- ✓ **Modern styling** to enhance equipment aesthetics.
- ✓ **Advanced engineered thermoplastic construction** offers maintenance-free operation and rugged durability.
- ✓ **Reinforced fork** is chemical and shock resistant for lasting performance under load.
- ✓ **Ideally suited** for high-end carts and portable equipment.
- ✓ **Steel top plate** is zinc plated for resist rust and corrosion.
- ✓ **Double ball bearing steel raceway** is heat-treated for maximum durability and swiveling ease.
- ✓ **Maximum operating temperature:** +192° F (constant)

CASTER OPTIONS


- ✓ **Stainless steel:** stainless steel top plate or stems, ball bearings, raceways and kingpin. To order, add "S" to beginning of body of model number. (For example, 5-S50MG-314GD).
- ✓ **Plastic Thread Guards:** to order, add "TG" to end of model number.
- ✓ **Axle Caps:** to order, add "A" to end of model number.
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels – consult factory.
- ✓ **Optional Top Plate & Stem Sizes:** variety of top plate sizes available – consult factory.



5-50MG-314GD TL TG A
(shown in photo)

MOUNTING OPTIONS

Top Plate: Optional Top Plate Sizes: variety of top plate sizes available – consult factory.



Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"

Spring Ring Stem Sizes: to order, specify stem code number and add to end of caster model number.



Stem Code	Spring Ring Stem Sizes
STEM 1	.845" diameter round x 2-3/16" long
STEM 2	.865" diameter round x 2-3/16" long
STEM 3	.860" diameter SQUARE x 2-3/16" long

Threaded Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 5-56MG-314GD STEM 1)



Stem Code	Threaded Stem Sizes
STEM 1	1/2" diameter –13 x 3/4" long
STEM 2	1/2" diameter –13 x 1" long
STEM 3	1/2" diameter –13 x 1-1/2" long
STEM 4	1/2" diameter –20 x 3/4" long
STEM 5	1/2" diameter –20 x 2-1/4" long
STEM 6	5/8" diameter –11 x 1-1/4" long
STEM 7	5/8" diameter –18 x 1-3/4" long
STEM 8	3/4" diameter –10 x 1" long

Expanding Adapter Stem Sizes: Rubber bushing expands inside of tubing as 3/4" nut beneath lower raceway is turned with wrench. Plastic bushing on bottom of stem provides stability for stem inside of tubing for tight, permanent fit.



See chart below for adapter sizes and matching tube sizes. To order, add adapter number to end of model number (example: 5-60MG-314GD 9).

Threaded stem size (less adapter): 1/2" diameter x 2- 3/4" long.

Adapter Number	Tubing I.D. (inches)
9	3/4"
11	7/8"
13	1"
15	1-1/8"
17 B	1-3/16"
19 C	1-3/8"
19 A	1-1/2"
21	1-7/8"

WHEEL OPTIONS



Advantage TPR Round

PolyLoc Grey

50MG SERIES



5-50MG-314GD TG A
(shown in photo)



5-50MG-314GD TL TG A
(shown in photo)

Top Plate

Free Swivel • Total Lock • Swivel Lock

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Free Swivel Model Number	Total Lock Model Number	Swivel Lock Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
5	1 1/4	Advantage TPR / Round	Delrin	250	5-50MG-314GD	5-50MG-314GD TL	5-50MG-314GD SL1	1-1/2	6 3/8	4
		Advantage TPR / Round	Ball	250	5-50MG-213GD	5-50MG-213GD TL	5-50MG-213GD SL1	1-1/2		
		PolyLoc / Grey	Delrin	250	5-50MG-314GP	5-50MG-314GP TL	5-50MG-314GP SL1	1-1/2		
		PolyLoc / Grey	Ball	250	5-50MG-213GP	5-50MG-213GP TL	5-50MG-213GP SL1	1-5/8		



5-54MG-314GD TG A STEM 1
(shown in photo)



5-54MG-314GD TL TG A STEM 1
(shown in photo)

Spring Ring Stem

Free Swivel • Total Lock • Swivel Lock

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Free Swivel Model Number	Total Lock Model Number	Swivel Lock Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
5	1 1/4	Advantage TPR / Round	Delrin	250	5-54MG-314GD	5-54MG-314GD TL	5-54MG-314GD SL1	1-7/8	6 3/8	4
		Advantage TPR / Round	Ball	250	5-54MG-213GD	5-54MG-213GD TL	5-54MG-213GD SL1	1-7/8		
		PolyLoc / Grey	Delrin	250	5-54MG-314GP	5-54MG-314GP TL	5-54MG-314GP SL1	1-7/8		
		PolyLoc / Grey	Ball	250	5-54MG-213GP	5-54MG-213GP TL	5-54MG-213GP SL1	2		



5-56MG-314GD TG A STEM 1
(shown in photo)



5-56MG-213GP TL TG A STEM 1
(shown in photo)

Threaded Stem

Free Swivel • Total Lock • Swivel Lock

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Free Swivel Model Number	Total Lock Model Number	Swivel Lock Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
5	1 1/4	Advantage TPR / Round	Delrin	250	5-56MG-314GD	5-56MG-314GD TL	5-56MG-314GD SL1	1-5/8	6 3/8	4
		Advantage TPR / Round	Ball	250	5-56MG-213GD	5-56MG-213GD TL	5-56MG-213GD SL1	1-7/8		
		PolyLoc / Grey	Ball	250	5-56MG-213GP	5-56MG-213GP TL	5-56MG-213GP SL1	1-7/8		
		PolyLoc / Grey	Delrin	250	5-56MG-314GP	5-56MG-314GP TL	5-56MG-314GP SL1	1-5/8		



5-60MG-314GD TG A STEM 1
(shown in photo)



5-60MG-213GD TL TG A STEM 1
(shown in photo)

Expanding Adapter Stem

Free Swivel • Total Lock • Swivel Lock

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Free Swivel Model Number	Total Lock Model Number	Swivel Lock Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
5	1 1/4	Advantage TPR / Round	Delrin	250	5-60MG-314GD	5-60MG-314GD TL	5-60MG-314GD SL1	1-5/8	6 3/8	4
		Advantage TPR / Round	Ball	250	5-60MG-213GD	5-60MG-213GD TL	5-60MG-213GD SL1	1-7/8		
		PolyLoc / Grey	Ball	250	5-60MG-213GP	5-60MG-213GP TL	5-60MG-213GP SL1	1-7/8		
		PolyLoc / Grey	Delrin	250	5-60MG-314GP	5-60MG-314GP TL	5-60MG-314GP SL1	1-5/8		

50MG SERIES

50HN Series

Infinity™ Thermoplastic Casters
Swivel • Total Lock • Swivel Lock
Capacity to 300 pounds each



5-50HN-314GD TG A PLT2
(shown in photo)

FEATURES

- ✓ **Ideally suited** for medical, high-tech and institutional equipment.
- ✓ **Sleek, advanced design** combines corrosion and chemical resistance with silent operation.
- ✓ **Molded from engineered, reinforced thermoplastics** for trouble-free performance even in wash-down applications.
- ✓ **Precision ball bearing** swivel raceway for smooth, effortless swivel action
- ✓ **Non-marking** wheel design.
- ✓ **Steel top plates** and mounting stems are zinc plated to resist rust.
- ✓ **Axle:** 3/8" diameter riveted.

CASTER OPTIONS

- ✓ **Stainless steel:** stainless steel top plate and mounting stems, swivel ball bearings and kingpin available – consult factory.
- ✓ **Plastic Thread Guards:** to order, add "TG" to end of model number.
- ✓ **Axle Caps:** to order, add "A" to end of model number.
- ✓ **Optional Top Plate & Stem Sizes:** variety of top plate sizes available – consult factory.

MOUNTING OPTIONS

Top Plate Sizes (swivel & rigid): to order, add Plate Mounting Code to end of model number. (Example: 5-50HN-314GD TG A PLT2)

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 2	2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"
PLT 3	3-1/8" x 4-1/8"	2-3/8" x 3-7/16"	5/16"
PLT 5	3-3/4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"
PLT 7	3-1/2" x 3-1/2"	2-5/8" x 2-5/8"	9/32"

Spring Ring Stem

Sizes: to order, specify stem code number and add to end of caster model number.



Stem Code	Spring Ring Stem Sizes
STEM 1	.845" diameter round x 2-3/16" long
STEM 2	.865" diameter round x 2-3/16" long
STEM 3	.860" diameter SQUARE x 2-3/16" long

Threaded Stem

Sizes: to order, specify stem code number and add to end of caster model number.



(Example: 5-56HN-314GD STEM 1).

Stem Code	Threaded Stem Sizes
STEM 1	1/2" diameter – 13 x 3/4" long
STEM 2	1/2" diameter – 13 x 1" long
STEM 3	1/2" diameter – 13 x 1-1/2" long
STEM 5	1/2" diameter – 20 x 2-1/4" long
STEM 6	5/8" diameter – 11 x 1-1/4" long
STEM 7	5/8" diameter – 18 x 1-3/4" long
STEM 8	3/4" diameter – 10 x 1" long

WHEEL OPTIONS



Cushion or Rubber Cushion or Hard Rubber w/Side Plates Advantage TPR Round Advantage TPR Flat Welded Disc Blue Poly, Black or Grey Rubber PolyLoc Grey PolyLoc Blue

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Free Swivel Model Number	Total Lock Model Number	Swivel Lock Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
Top Plate										
5	1 1/4	Cushion / Solid Rubber *	Ball	200	5-50HN-500 *	5-50HN-500 TL *	5-50HN-500 SL1 *	2-3/4	6 1/4	4 1/4
		Welded Disc / Grey Rubber	Ball	200	5-50HN-113G	5-50HN-113G TL	5-50HN-113G SL1	2-3/4		
		Advantage TPR / Round	Delrin	250	5-50HN-314GD	5-50HN-314GD TL	5-50HN-314GD SL1	2-3/4		
		Advantage TPR / Round	Ball	250	5-50HN-213GD	5-50HN-213GD TL	5-50HN-213GD SL1	2-3/4		
		Welded Disc / Polyurethane	Ball	300	5-50HN-113P	5-50HN-113P TL	5-50HN-113P SL1	2-3/4		
		Advantage TPR / Flat	Delrin	300	5-50HN-314GF	5-50HN-314GF TL	5-50HN-314GF SL1	2-3/4		
		Advantage TPR / Flat	Ball	300	5-50HN-213GF	5-50HN-213GF TL	5-50HN-213GF SL1	2-3/4		
		PolyLoc / Grey	Ball	300	5-50HN-213G	5-50HN-213G TL	5-50HN-213G SL1	2-3/4		
PolyLoc / Blue	Ball	300	5-50HN-213P	5-50HN-213P TL	5-50HN-213P SL1	2-3/4				
Spring Ring Stem										
5	1 1/4	Cushion Solid Rubber *	Ball	200	5-54HN-500 *	5-54HN-500 TL *	5-54HN-500 SL1 *	2-3/4	6 1/4	4 1/4
		Welded Disc / Grey Rubber	Ball	200	5-54HN-113G	5-54HN-113G TL	5-54HN-113G SL1	2-3/4		
		Advantage TPR / Round	Delrin	250	5-54HN-314GD	5-54HN-314GD TL	5-54HN-314GD SL1	2-3/4		
		Advantage TPR / Round	Ball	250	5-54HN-213GD	5-54HN-213GD TL	5-54HN-213GD SL1	2-3/4		
		Welded Disc / Polyurethane	Ball	300	5-54HN-113P	5-54HN-113P TL	5-54HN-113P SL1	2-3/4		
		Advantage TPR / Flat	Delrin	300	5-54HN-314GF	5-54HN-314GF TL	5-54HN-314GF SL1	2-3/4		
		Advantage TPR / Flat	Ball	300	5-54HN-213GF	5-54HN-213GF TL	5-54HN-213GF SL1	2-3/4		
		PolyLoc / Grey	Ball	300	5-54HN-213G	5-54HN-213G TL	5-54HN-213G SL1	2-3/4		
PolyLoc / Blue	Ball	300	5-54HN-213P	5-54HN-213P TL	5-54HN-213P SL1	2-3/4				
Threaded Stem										
5	1 1/4	Cushion Solid Rubber *	Ball	200	5-56HN-500 *	5-56HN-500 TL *	5-56HN-500 SL1 *	2-3/4	6 1/4	4 1/4
		Welded Disc / Grey Rubber	Ball	200	5-56HN-113G	5-56HN-113G TL	5-56HN-113G SL1	2-3/4		
		Advantage TPR / Round	Delrin	250	5-56HN-314GD	5-56HN-314GD TL	5-56HN-314GD SL1	2-3/4		
		Advantage TPR / Round	Ball	250	5-56HN-213GD	5-56HN-213GD TL	5-56HN-213GD SL1	2-3/4		
		Welded Disc / Polyurethane	Ball	300	5-56HN-113P	5-56HN-113P TL	5-56HN-113P SL1	2-3/4		
		Advantage TPR / Flat	Delrin	300	5-56HN-314GF	5-56HN-314GF TL	5-56HN-314GF SL1	2-3/4		
		Advantage TPR / Flat	Ball	300	5-56HN-213GF	5-56HN-213GF TL	5-56HN-213GF SL1	2-3/4		
		PolyLoc / Grey	Ball	300	5-56HN-213G	5-56HN-213G TL	5-56HN-213G SL1	2-3/4		
PolyLoc / Blue	Ball	300	5-56HN-213P	5-56HN-213P TL	5-56HN-213P SL1	2-3/4				

* Wheels have decorative side plates.

130 Series



Swivel & Rigid Top Plate

Capacity to 400 pounds each

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength and heat treated.
- ✓ **Dust Cap:** protects swivel raceway bearings and improves performance.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** Wheel sizes 3", 4" and 5" use 3/8" dia axle. Wheel sizes 6" and 8" use 1/2" diameter axle.
- ✓ **King Pin:** 1/2" steel rivet
- ✓ **Fork Leg Spacing:** 2"

CASTER OPTIONS


- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number. 
- ✓ **Swivel Grease Seal:** Includes zerk grease fitting in dust cap. To order, add "GS" to end of model number. 
- ✓ **Optional Plate Sizes:** variety of plate sizes available – consult factory.

MOUNTING OPTIONS

Top Plate Sizes (swivel & rigid): to order, add Plate Mounting Code to end of model number. (Example: 5-130-522 PLT 2)

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 1	2-3/8" x 3-5/8"	1-3/4" x 3"	1/4"
PLT 2	2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"
PLT 3	3-1/8" x 4-1/8"	2-3/8" x 3-7/16"	5/16"
PLT 4	4" x 4"	3" x 3"	3/8"
PLT 5	3-3/4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"
PLT 7	3-1/2" x 3-1/2"	2-5/8" x 2-5/8"	9/32"

WHEEL OPTIONS

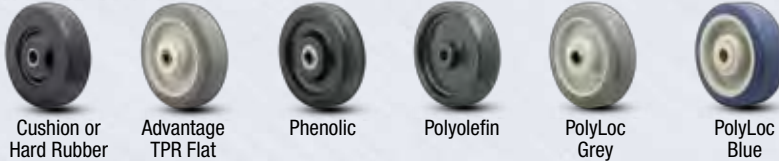

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 13/16	POLYOLEFIN	ROLLER	400	3-130-532	3-131-532	1-3/4	4	2 3/8
4	1 5/8	CUSHION / SOLID RUBBER	PLAIN	225	4-130-109	4-131-109	2-1/8	5 3/8	3 1/2
		CUSHION / SOLID RUBBER	ROLLER	225	4-130-209	4-131-209	2-1/8		
		HARD / SOLID RUBBER	PLAIN	400	4-130-110	4-131-110	2-1/8		
		HARD / SOLID RUBBER	ROLLER	400	4-130-210	4-131-210	2-1/8		
	1 1/2	PHENOLIC	PLAIN	400	4-130-121	4-131-121	2-1/8		
		PHENOLIC	ROLLER	400	4-130-221	4-131-221	2-1/8		
		POLYOLEFIN	PLAIN	400	4-130-521	4-131-521	2-1/8		
		POLYOLEFIN	ROLLER	400	4-130-522	4-131-522	2-1/8		
5	1 5/8	CUSHION / SOLID RUBBER	PLAIN	260	5-130-109	5-131-109	2-3/4	6 1/4	4
		CUSHION / SOLID RUBBER	ROLLER	260	5-130-209	5-131-209	2-3/4		
		HARD / SOLID RUBBER	PLAIN	400	5-130-110	5-131-110	2-1/2		
		HARD / SOLID RUBBER	ROLLER	400	5-130-210	5-131-210	2-1/2		
	1 1/2	PHENOLIC	PLAIN	400	5-130-121	5-131-121	2-1/2		
		PHENOLIC	ROLLER	400	5-130-221	5-131-221	2-1/2		
		POLYOLEFIN	PLAIN	400	5-130-521	5-131-521	2-3/4		
		POLYOLEFIN	ROLLER	400	5-130-522	5-131-522	2-3/4		
		ADVANTAGE TPR / FLAT	ROLLER	400	5-130-215GF	5-131-215GF	2-1/8		
		POLYLOC / GREY	ROLLER	400	5-130-215G	5-131-215G	2-1/8		
POLYLOC / BLUE	ROLLER	400	5-130-215P	5-131-215P	2-1/8				
6	1 1/2	PHENOLIC	PLAIN	400	6-130-121	6-131-121	2-3/4	7 1/2	4 3/4
		PHENOLIC	ROLLER	400	6-130-221	6-131-221	2-3/4		
		POLYOLEFIN	DELTRIN	400	6-130-523	6-131-523	2-3/4		
		POLYOLEFIN	ROLLER	400	6-130-522	6-131-522	2-3/4		
		ADVANTAGE TPR / FLAT	ROLLER	400	6-130-215GF	6-131-215GF	2-3/4		
		POLYLOC / GREY	ROLLER	400	6-130-215G	6-131-215G	2-3/4		
		POLYLOC / BLUE	ROLLER	400	6-130-215P	6-131-215P	2-3/4		
		8	1 1/2	ADVANTAGE TPR / FLAT	ROLLER	250	8-130-215GF		
POLYLOC / GREY	ROLLER			250	8-130-215G	8-131-215G	3		
POLYLOC / BLUE	ROLLER			250	8-130-215P	8-131-215P	3		
POLYOLEFIN	DELTRIN			250	8-130-523	8-131-523	3		
POLYOLEFIN	ROLLER			250	8-130-522	8-131-522	3		

5-131-215GF PLT2
(shown in photo)

5-130-522 PLT2
(shown in photo)

130 SERIES

134 Series



Spring Ring Stem

Capacity to 400 pounds each

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength and heat treated.
- ✓ **Dust Cap:** protects swivel raceway bearings and improves performance.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** Wheel sizes 3", 4" and 5" use 3/8" dia axle. Wheel sizes 6" and 8" use 1/2" diameter axle.
- ✓ **King Pin:** 1/2" steel rivet
- ✓ **Fork Leg Spacing:** 2"

CASTER OPTIONS

- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number. 
- ✓ **Swivel Grease Seal:** Includes zerk grease fitting in dust cap. To order, add "GS" to end of model number. 
- ✓ **Optional Stem Sizes:** variety of stem sizes available – consult factory.



5-134-215G STEM 1
(shown in photo)

MOUNTING OPTIONS

Standard Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 6-134-215G STEM 1).

Stem Code	Stem Sizes
STEM 1	3/4" diameter x 2-3/16" long
STEM 2	13/16" diameter x 2-3/16" long
STEM 3	.845" diameter x 2-3/16" long
STEM 4	.865" diameter x 2-3/16" long
STEM 5	1" diameter x 2-3/16" long
STEM 6	.860" SQUARE x 2-3/16" long

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Ring Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 13/16	POLYOLEFIN	ROLLER	400	3-134-532	1-3/4	3 13/16	2 3/8
4	1 5/8	CUSHION / SOLID RUBBER	PLAIN	225	4-134-109	2-1/8	5 3/16	3 1/2
		CUSHION / SOLID RUBBER	ROLLER	225	4-134-209	2-1/8		
		HARD / SOLID RUBBER	PLAIN	400	4-134-110	2-1/8		
		HARD / SOLID RUBBER	ROLLER	400	4-134-210	2-1/8		
	1 1/2	PHENOLIC	PLAIN	400	4-134-121	2-1/8		
		PHENOLIC	ROLLER	400	4-134-221	2-1/8		
		POLYOLEFIN	PLAIN	400	4-134-521	2-1/8		
		POLYOLEFIN	ROLLER	400	4-134-522	2-1/8		
5	1 5/8	CUSHION / SOLID RUBBER	PLAIN	260	5-134-109	2-3/4	6 1/16	4
		CUSHION / SOLID RUBBER	ROLLER	260	5-134-209	2-3/4		
		HARD / SOLID RUBBER	PLAIN	400	5-134-110	2-1/2		
		HARD / SOLID RUBBER	ROLLER	400	5-134-210	2-1/2		
	1 1/2	PHENOLIC	PLAIN	400	5-134-121	2-1/2		
		PHENOLIC	ROLLER	400	5-134-221	2-1/2		
		POLYOLEFIN	PLAIN	400	5-134-521	2-3/4		
		POLYOLEFIN	ROLLER	400	5-134-522	2-3/4		
		ADVANTAGE TPR / FLAT	ROLLER	400	5-134-215GF	2-1/8		
		POLYLOC / GREY	ROLLER	400	5-134-215G	2-1/8		
POLYLOC / BLUE	ROLLER	400	5-134-215P	2-1/8				
6	1 1/2	PHENOLIC	PLAIN	400	6-134-121	2-3/4	7 5/16	4 3/4
		PHENOLIC	ROLLER	400	6-134-221	2-3/4		
		POLYOLEFIN	DELTRIN	400	6-134-523	2-3/4		
		POLYOLEFIN	ROLLER	400	6-134-522	2-3/4		
		ADVANTAGE TPR / FLAT	ROLLER	400	6-134-215GF	2-3/4		
		POLYLOC / GREY	ROLLER	400	6-134-215G	2-3/4		
		POLYLOC / BLUE	ROLLER	400	6-134-215P	2-3/4		
		8	1 1/2	ADVANTAGE TPR / FLAT	ROLLER	250		
POLYLOC / GREY	ROLLER			250	8-134-215G	3		
POLYLOC / BLUE	ROLLER			250	8-134-215P	3		
POLYOLEFIN	DELTRIN			250	8-134-523	3		
POLYOLEFIN	ROLLER			250	8-134-522	3		



136 Series

Threaded Stem

Capacity to 400 pounds each





5-136-215GF STEM 1
(shown in photo)

FEATURES

- ✓ **Design:** heavy gauge cold rolled steel, formed for strength and heat treated.
- ✓ **Dust Cap:** protects swivel raceway bearings and improves performance.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** Wheel sizes 3", 4" and 5" use 3/8" dia axle. Wheel sizes 6" and 8" use 1/2" diameter axle.
- ✓ **King Pin:** 1/2" steel rivet
- ✓ **Fork Leg Spacing:** 2"

CASTER OPTIONS

- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number. 
- ✓ **Swivel Grease Seal:** Includes zerk grease fitting in dust cap. To order, add "GS" to end of model number. 
- ✓ **Optional Stem Sizes:** variety of stem sizes available – consult factory.

MOUNTING OPTIONS

Standard Stem Sizes: to order, specify stem code number and add to end of caster model number (Example: 6-136-215G **STEM 1**).

Stem Code	Stem Sizes
STEM 1	1/2" diameter – 13 x 3/4" long
STEM 2	1/2" diameter – 13 x 1" long
STEM 3	1/2" diameter – 13 x 1-1/2" long
STEM 4	1/2" diameter – 20 x 3/4" long
STEM 5	1/2" diameter – 20 x 2-1/4" long
STEM 6	5/8" diameter – 11 x 1-1/4" long
STEM 7	5/8" diameter – 18 x 1-3/4" long
STEM 8	3/4" diameter – 10 x 1" long

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 13/16	POLYOLEFIN	ROLLER	400	3-136-532	1-3/4	3 7/8	2 3/8
4	1 5/8	CUSHION / SOLID RUBBER	PLAIN	225	4-136-109	2-1/8	5 3/16	3 1/2
		CUSHION / SOLID RUBBER	ROLLER	225	4-136-209	2-1/8		
		HARD / SOLID RUBBER	PLAIN	400	4-136-110	2-1/8		
		HARD / SOLID RUBBER	ROLLER	400	4-136-210	2-1/8		
	1 1/2	PHENOLIC	PLAIN	400	4-136-121	2-1/8		
		PHENOLIC	ROLLER	400	4-136-221	2-1/8		
		POLYOLEFIN	PLAIN	400	4-136-521	2-1/8		
		POLYOLEFIN	ROLLER	400	4-136-522	2-1/8		
5	1 5/8	CUSHION / SOLID RUBBER	PLAIN	260	5-136-109	2-3/4	6 1/16	4
		CUSHION / SOLID RUBBER	ROLLER	260	5-136-209	2-3/4		
		HARD / SOLID RUBBER	PLAIN	400	5-136-110	2-1/2		
		HARD / SOLID RUBBER	ROLLER	400	5-136-210	2-1/2		
	1 1/2	PHENOLIC	PLAIN	400	5-136-121	2-1/2		
		PHENOLIC	ROLLER	400	5-136-221	2-1/2		
		POLYOLEFIN	PLAIN	400	5-136-521	2-3/4		
		POLYOLEFIN	ROLLER	400	5-136-522	2-3/4		
		ADVANTAGE TPR / FLAT	ROLLER	400	5-136-215GF	2-1/8		
		POLYLOC / GREY	ROLLER	400	5-136-215G	2-1/8		
POLYLOC / BLUE	ROLLER	400	5-136-215P	2-1/8				
6	1 1/2	PHENOLIC	PLAIN	400	6-136-121	2-3/4	7 5/16	4 3/4
		PHENOLIC	ROLLER	400	6-136-221	2-3/4		
		POLYOLEFIN	DELTRIN	400	6-136-523	2-3/4		
		POLYOLEFIN	ROLLER	400	6-136-522	2-3/4		
		ADVANTAGE TPR / FLAT	ROLLER	400	6-136-215GF	2-3/4		
		POLYLOC / GREY	ROLLER	400	6-136-215G	2-3/4		
		POLYLOC / BLUE	ROLLER	400	6-136-215P	2-3/4		
8	1 1/2	ADVANTAGE TPR / FLAT	ROLLER	250	8-136-215GF	3	9 5/16	6 1/2
		POLYLOC / GREY	ROLLER	250	8-136-215G	3		
		POLYLOC / BLUE	ROLLER	250	8-136-215P	3		
		POLYOLEFIN	DELTRIN	250	8-136-523	3		
		POLYOLEFIN	ROLLER	250	8-136-522	3		
		POLYOLEFIN	ROLLER	250	8-136-522	3		

136 SERIES



61 Series

Swivel & Rigid Top Plate

Capacity to 500 pounds each

FEATURES

- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Design:** fork legs formed from 3/16" thick steel.
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 1/2" diameter with zerkl grease fitting.
- ✓ **King Pin:** 5/8" steel rivet, hydraulically upset.
- ✓ **Zerk Grease Fitting:** swivel raceway
- ✓ **Fork Leg Spacing:** 2".

CASTER OPTIONS

- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



- ✓ **Swivel Lock / Bolt-On:** Field installable 4-position swivel lock.



To order specify swivel lock number **3091-22**. See page 92 for details.

- ✓ **Swivel Grease Seal:** To order, add "GS" to end of model number.



6-62-525
(shown in photo)

6-61-215P
(shown in photo)

MOUNTING

Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
4" x 4 -1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

WHEEL OPTIONS



Cushion Rubber



Hard Rubber



Advantage TPR Flat



Moldon Rubber/Aluminum Core



Moldon Polyurethane/Aluminum Core



Phenolic



Polyolefin



PolyLoc Grey



PolyLoc Blue



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	1 5/8	CUSHION / SOLID RUBBER	SINTERED	225	4-61-109	4-62-109	4	5 5/8	3 9/16
		CUSHION / SOLID RUBBER	ROLLER	225	4-61-209	4-62-209	4		
		HARD / SOLID RUBBER	SINTERED	350	4-61-110	4-62-110	4		
		HARD / SOLID RUBBER	ROLLER	350	4-61-210	4-62-210	4		
	1 1/2	MOLDON RUBBER / ALUMINUM CORE	BALL	225	4-61-615	4-62-615	5		
		MOLDON POLYURETHANE / ALUMINUM CORE	BALL	425	4-61-715	4-62-715	5		
		POLYOLEFIN	PLAIN	450	4-61-521	4-62-521	5		
		POLYOLEFIN	ROLLER	450	4-61-522	4-62-522	5		
		PHENOLIC	PLAIN	500	4-61-121	4-62-121	4		
		PHENOLIC	ROLLER	500	4-61-221	4-62-221	4		
5	1 5/8	CUSHION / SOLID RUBBER	SINTERED	260	5-61-109	5-62-109	5	6 1/2	4 5/16
		CUSHION / SOLID RUBBER	ROLLER	260	5-61-209	5-62-209	5		
		HARD / SOLID RUBBER	SINTERED	400	5-61-110	5-62-110	5		
		HARD / SOLID RUBBER	ROLLER	400	5-61-210	5-62-210	5		
	1 1/2	MOLDON RUBBER / ALUMINUM CORE	BALL	250	5-61-615	5-62-615	6		
		ADVANTAGE TPR / FLAT	ROLLER	350	5-61-215GF	5-62-215GF	6		
		POLYOLEFIN	PLAIN	450	5-61-521	5-62-521	5		
		POLYOLEFIN	ROLLER	450	5-61-522	5-62-522	5		
		MOLDON POLYURETHANE / ALUMINUM CORE	BALL	450	5-61-715	5-62-715	6		
		POLYLOC / GREY	ROLLER	500	5-61-215G	5-62-215G	5		
		POLYLOC / BLUE	ROLLER	500	5-61-215P	5-62-215P	5		
		PHENOLIC	PLAIN	500	5-61-121	5-62-121	5		
		PHENOLIC	ROLLER	500	5-61-221	5-62-221	5		
6	1 1/2	POLYLOC / GREY	ROLLER	300	6-61-215G	6-62-215G	6	7 1/2	5 1/16
		MOLDON RUBBER / ALUMINUM CORE	BALL	350	6-61-615	6-62-615	7		
		ADVANTAGE TPR / FLAT	ROLLER	375	6-61-215GF	6-62-215GF	6		
		POLYLOC / BLUE	ROLLER	500	6-61-215P	6-62-215P	6		
		PHENOLIC	PLAIN	500	6-61-121	6-62-121	6		
		PHENOLIC	ROLLER	500	6-61-221	6-62-221	6		
		POLYOLEFIN	DELTRIN	500	6-61-523	6-62-523	6		
		POLYOLEFIN	ROLLER	500	6-61-525	6-62-525	7		
		MOLDON POLYURETHANE / ALUMINUM CORE	BALL	500	6-61-715	6-62-715	7		
		8	1 1/2	ADVANTAGE TPR / FLAT	ROLLER	500	8-61-215GF		
POLYLOC / GREY	ROLLER			500	8-61-215G	8-62-215G	8		
POLYLOC / BLUE	ROLLER			500	8-61-215P	8-62-215P	8		
POLYOLEFIN	DELTRIN			500	8-61-523	8-62-523	8		
POLYOLEFIN	ROLLER			500	8-61-525	8-62-525	8		

61 SERIES

71 Series

Swivel & Rigid Top Plate

Capacity to 900 pounds each

FEATURES

- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Design:** fork legs formed for added strength
- ✓ **Swivel Construction:** double ball bearing
- ✓ **Axle:** 1/2" diameter.
- ✓ **King Pin:** steel rivet, hydraulically upset.
- ✓ **Zerk Grease Fitting:** swivel raceway.
- ✓ **Fork Leg Spacing:** 2-1/2"

NEW

CASTER OPTIONS

✓ **VertiLoc® Brake:** to order, add "VL" to end of model number.



✓ **Swivel Lock / Bolt-On:** Field installable 4-position swivel lock. To order specify swivel lock number



3091-22. See page 92 for details.

✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels—consult factory.

✓ **Swivel Grease Seal:** To order, add "GS" to end of model number.



✓ **Thread Guards:** See page 94 for thread guard availability.



6-72-760 PLT 1
(shown in photo)

6-71-620CI PLT 1
(shown in photo)

MOUNTING

Top Plate Sizes (swivel & rigid)

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 1	4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

WHEEL OPTIONS



Moldon Rubber/
Aluminum Core



Moldon Rubber/
Cast Iron Core



Advantage
TPR Flat



Advantage
TPR Round



High Modulus
Rubber Donut



PolyLoc
Grey



PolyLoc
Blue



Moldon Polyurethane/
Aluminum Core



Moldon Polyurethane/
Cast Iron Core



Phenolic



Polyolefin



Solid
Elastomer



V-Groove



Cast Iron



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	2	MOLDON RUBBER / ALUM. CORE	ROLLER	300	4-71-620	4-72-620	7-1/2	5 5/8	3 9/16
		ADVANTAGE TPR / FLAT	ROLLER	350	4-71-220GF	4-72-220GF	6-1/2		
		MOLDON RUBBER / CAST IRON CORE	ROLLER	400	4-71-620CI	4-72-620CI	7-1/2		
		POLYOLEFIN	PLAIN	500	4-71-531	4-72-531	7-1/2		
		POLYOLEFIN	ROLLER	500	4-71-532	4-72-532	7-1/2		
		POLYLOC / GREY	ROLLER	600	4-71-220G	4-72-220G	6-1/2		
		MOLDON POLYURETHANE / ALUMINUM CORE	ROLLER	600	4-71-720	4-72-720	7-1/2		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	700	4-71-720CI	4-72-720CI	7-1/2		
		CAST IRON	ROLLER	750	4-71-250	4-72-250	7-1/2		
		PHENOLIC	PLAIN	800	4-71-122	4-72-122	6-1/2		
		PHENOLIC	ROLLER	800	4-71-222	4-72-222	6-1/2		
		SOLID ELASTOMER	ROLLER	900	4-71-760	4-72-760	7-1/2		
SOLID ELASTOMER	PRECISION BALL	900	4-71-770	4-72-770	7-1/2				
5	2	MOLDON RUBBER / ALUMINUM CORE	ROLLER	350	5-71-620	5-72-620	8	6 1/2	4 5/16
		ADVANTAGE TPR / FLAT	ROLLER	375	5-71-220GF	5-72-220GF	7		
		MOLDON RUBBER / CAST IRON CORE	ROLLER	400	5-71-620CI	5-72-620CI	8		
		POLYOLEFIN	PLAIN	650	5-71-531	5-72-531	7		
		POLYOLEFIN	ROLLER	650	5-71-532	5-72-532	7		
		POLYLOC / GREY	ROLLER	700	5-71-220G	5-72-220G	7		
		POLYLOC / BLUE	ROLLER	700	5-71-220P	5-72-220P	7		
		CAST IRON	ROLLER	800	5-71-250	5-72-250	8		
		V-GROOVE	ROLLER	800	5-71-250V	5-72-250V	9		
		MOLDON POLYURETHANE / ALUMINUM CORE	ROLLER	900	5-71-720	5-72-720	8		
		PHENOLIC	PLAIN	900	5-71-122	5-72-122	8		
		PHENOLIC	ROLLER	900	5-71-222	5-72-222	8		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	900	5-71-720CI	5-72-720CI	8		
		SOLID ELASTOMER	ROLLER	900	5-71-760	5-72-760	8		
		SOLID ELASTOMER	PRECISION BALL	900	5-71-770	5-72-770	8		
6	2	MOLDON RUBBER / ALUMINUM CORE	ROLLER	410	6-71-620	6-72-620	9	7 1/2	5 1/16
		ADVANTAGE TPR / ROUND	BALL	450	6-71-220GDB	6-72-220GDB	8		
		ADVANTAGE TPR / ROUND	ROLLER	450	6-71-220GD	6-72-220GD	8		
		MOLDON RUBBER / CAST IRON CORE	ROLLER	450	6-71-620CI	6-72-620CI	9		
		ADVANTAGE TPR / FLAT	ROLLER	600	6-71-220GF	6-72-220GF	8		
		POLYOLEFIN	PLAIN	700	6-71-531	6-72-531	8		
		POLYOLEFIN	ROLLER	700	6-71-532	6-72-532	8		
		POLYLOC / GREY	ROLLER	800	6-71-220G	6-72-220G	8		
		POLYLOC / BLUE	ROLLER	800	6-71-220P	6-72-220P	8		
		V-GROOVE	ROLLER	900	6-71-250V	6-72-250V	11		
		MOLDON POLYURETHANE / ALUMINUM CORE	ROLLER	900	6-71-720	6-72-720	9		
		PHENOLIC	PLAIN	900	6-71-122	6-72-122	9		
		PHENOLIC	ROLLER	900	6-71-222	6-72-222	9		
		CAST IRON	ROLLER	900	6-71-250	6-72-250	9		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	900	6-71-720CI	6-72-720CI	9		
		SOLID ELASTOMER	ROLLER	900	6-71-760	6-72-760	9		
	SOLID ELASTOMER	PRECISION BALL	900	6-71-770	6-72-770	9			
2 1/8	HIGH MODULUS RUBBER DONUT	BALL	350	6-71-600	6-72-600	6			
8	2	ADVANTAGE TPR / ROUND	BALL	500	8-71-220GDB	8-72-220GDB	9	9 1/2	6 1/2
		ADVANTAGE TPR / ROUND	ROLLER	500	8-71-220GD	8-72-220GD	9		
		MOLDON RUBBER / ALUMINUM CORE	ROLLER	500	8-71-620	8-72-620	10		
		MOLDON RUBBER / CAST IRON CORE	ROLLER	500	8-71-620CI	8-72-620CI	10		
		ADVANTAGE TPR / FLAT	ROLLER	675	8-71-220GF	8-72-220GF	9		
		POLYOLEFIN	PLAIN	900	8-71-531	8-72-531	9		
		POLYOLEFIN	ROLLER	900	8-71-532	8-72-532	9		
		POLYLOC / GREY	ROLLER	900	8-71-220G	8-72-220G	9		
		POLYLOC / BLUE	ROLLER	900	8-71-220P	8-72-220P	9		
		PHENOLIC	PLAIN	900	8-71-122	8-72-122	9		
		PHENOLIC	ROLLER	900	8-71-222	8-72-222	9		
		CAST IRON	ROLLER	900	8-71-250	8-72-250	10		
		MOLDON POLYURETHANE / ALUMINUM CORE	ROLLER	900	8-71-720	8-72-720	10		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	900	8-71-720CI	8-72-720CI	10		
		SOLID ELASTOMER	ROLLER	900	8-71-760	8-72-760	10		
	SOLID ELASTOMER	PRECISION BALL	900	8-71-770	8-72-770	10			
2 1/4	HIGH MODULUS RUBBER DONUT	BALL	450	8-71-600	8-72-600	7			

71 SERIES

81 Series




Swivel & Rigid Top Plate

Capacity to 1,250 pounds each

FEATURES




- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Design:** fork legs formed from 1/4" thick steel
- ✓ **Swivel Construction:** double ball bearing with hardened raceways.
- ✓ **Axle:** 1/2" diameter.
- ✓ **King Pin:** 5/8" steel rivet, hydraulically upset.
- ✓ **Zerk Grease Fitting:** swivel raceway.
- ✓ **Fork Leg Spacing:** 2-1/2"

CASTER OPTIONS

- ✓ **PosiLoc® Brake:** to order, add "PL" to end of model number.  Stainless steel components.
- ✓ **VertiLoc® Brake:** to order, add "VL" to end of model number. 
- ✓ **SideLock Brake:** to order, add "SLB" to end of model number. Right side brake optionally available – consult factory. 

CASTER OPTIONS

(Continued)

- ✓  **Swivel Lock / Bolt-On:** Field installable 4-position swivel lock. To order specify swivel lock number **3091-22**. See page 92 for details.
- ✓  **Swivel Lock / Welded:** Factory installed only. Spring loaded plunger locks swivel in 4-positions at 90° intervals. To order add "SL4" to end of model number. See page 92 for details.
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels –consult factory.
- ✓ **Swivel Grease Seal:**  To order, add "GS" to end of model number.
- ✓ **Thread Guards:** See page 94 for thread guard availability.



MOUNTING OPTIONS

Top Plate Sizes (swivel & rigid): to order, add Plate Mounting Code to end of model number. (Example: 5-81-220GF **PLT 1**)

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 1	4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"
PLT 2	5 x 5-1/2"	4-1/8" x 4-1/2" to 4" x 4"	3/8"
PLT 3	3-3/4" x 4-3/4"	3" x 3-7/8"	2 Holes 9/16", 2 Holes 25/64"
PLT 4	4-1/2" x 6-1/4"	2-7/16" x 4-15/16" to 3-3/8" x 5-1/4"	1/2"

WHEEL OPTIONS



Moldon Rubber/ Aluminum Core

Moldon Rubber/ Cast Iron Core

Advantage TPR Flat

Advantage TPR Round

High Modulus Rubber Donut

PolyLoc Grey

PolyLoc Blue

Moldon Polyurethane/ Aluminum Core

Moldon Polyurethane/ Cast Iron Core

Phenolic

Polyolefin

Solid Elastomer

V-Groove

Cast Iron



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	2	MOLDON RUBBER / ALUM. CORE	ROLLER	300	4-81-620	4-82-620	7-1/2	5 5/8	3 9/16
		ADVANTAGE TPR / FLAT	ROLLER	350	4-81-220GF	4-82-220GF	6-1/2		
		MOLDON RUBBER / CAST IRON CORE	ROLLER	400	4-81-620CI	4-82-620CI	7		
		POLYOLEFIN	PLAIN	500	4-81-531	4-82-531	7		
		POLYOLEFIN	ROLLER	500	4-81-532	4-82-532	7-1/2		
		POLYLOC / GREY	ROLLER	600	4-81-220G	4-82-220G	6-1/2		
		MOLDON POLYURETHANE / ALUMINUM CORE	ROLLER	600	4-81-720	4-82-720	7-1/2		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	700	4-81-720CI	4-82-720CI	7-1/2		
		CAST IRON	ROLLER	750	4-81-250	4-82-250	7-1/2		
		PHENOLIC	PLAIN	800	4-81-122	4-82-122	6-1/2		
		PHENOLIC	ROLLER	800	4-81-222	4-82-222	6-1/2		
		SOLID ELASTOMER	ROLLER	1,250	4-81-760	4-82-760	7-1/2		
SOLID ELASTOMER	PRECISION BALL	1,250	4-81-770	4-82-770	7-1/2				
5	2	MOLDON RUBBER / ALUMINUM CORE	ROLLER	350	5-81-620	5-82-620	8	6 1/2	4 5/16
		ADVANTAGE TPR / FLAT	ROLLER	375	5-81-220GF	5-82-220GF	7		
		MOLDON RUBBER / CAST IRON CORE	ROLLER	400	5-81-620CI	5-82-620CI	8		
		POLYOLEFIN	PLAIN	650	5-81-531	5-82-531	7-1/2		
		POLYOLEFIN	ROLLER	650	5-81-532	5-82-532	7-1/2		
		POLYLOC / GREY	ROLLER	700	5-81-220G	5-82-220G	7		
		POLYLOC / BLUE	ROLLER	700	5-81-220P	5-82-220P	7		
		CAST IRON	ROLLER	800	5-81-250	5-82-250	8		
		V-GROOVE	ROLLER	800	5-81-250V	5-82-250V	9		
		MOLDON POLYURETHANE / ALUMINUM CORE	ROLLER	900	5-81-720	5-82-720	8		
		PHENOLIC	PLAIN	1,000	5-81-122	5-82-122	8		
		PHENOLIC	ROLLER	1,000	5-81-222	5-82-222	8		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	1,050	5-81-720CI	5-82-720CI	8		
		SOLID ELASTOMER	ROLLER	1,250	5-81-760	5-82-760	8		
		SOLID ELASTOMER	PRECISION BALL	1,250	5-81-770	5-82-770	8		
6	2	MOLDON RUBBER / ALUMINUM CORE	ROLLER	410	6-81-620	6-82-620	9	7 1/2	5 1/16
		ADVANTAGE TPR / ROUND	BALL	450	6-81-220GDB	6-82-220GDB	8		
		ADVANTAGE TPR / ROUND	ROLLER	450	6-81-220GD	6-82-220GD	8		
		MOLDON RUBBER / CAST IRON CORE	ROLLER	450	6-81-620CI	6-82-620CI	9		
		ADVANTAGE TPR / FLAT	ROLLER	600	6-81-220GF	6-82-220GF	8		
		POLYOLEFIN	PLAIN	700	6-81-531	6-82-531	8		
		POLYOLEFIN	ROLLER	700	6-81-532	6-82-532	8		
		POLYLOC / GREY	ROLLER	800	6-81-220G	6-82-220G	8		
		POLYLOC / BLUE	ROLLER	800	6-81-220P	6-82-220P	8		
		V-GROOVE	ROLLER	900	6-81-250V	6-82-250V	11		
		MOLDON POLYURETHANE / ALUMINUM CORE	ROLLER	1,000	6-81-720	6-82-720	9		
		PHENOLIC	PLAIN	1,200	6-81-122	6-82-122	9		
		PHENOLIC	ROLLER	1,200	6-81-222	6-82-222	9		
		CAST IRON	ROLLER	1,200	6-81-250	6-82-250	9		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	1,200	6-81-720CI	6-82-720CI	9		
		SOLID ELASTOMER	ROLLER	1,250	6-81-760	6-82-760	9		
		SOLID ELASTOMER	PRECISION BALL	1,250	6-81-770	6-82-770	9		
	2 1/8	HIGH MODULUS RUBBER DONUT	BALL	350	6-81-600	6-82-600	6		
8	2	ADVANTAGE TPR / ROUND	BALL	500	8-81-220GDB	8-82-220GDB	9	9 1/2	6 1/2
		ADVANTAGE TPR / ROUND	ROLLER	500	8-81-220GD	8-82-220GD	9		
		MOLDON RUBBER / ALUMINUM CORE	ROLLER	500	8-81-620	8-82-620	10		
		MOLDON RUBBER / CAST IRON CORE	ROLLER	500	8-81-620CI	8-82-620CI	10		
		ADVANTAGE TPR / FLAT	ROLLER	675	8-81-220GF	8-82-220GF	9		
		POLYOLEFIN	PLAIN	900	8-81-531	8-82-531	9		
		POLYOLEFIN	ROLLER	900	8-81-532	8-82-532	9		
		POLYLOC / GREY	ROLLER	1,000	8-81-220G	8-82-220G	9		
		POLYLOC / BLUE	ROLLER	1,000	8-81-220P	8-82-220P	9		
		PHENOLIC	PLAIN	1,250	8-81-122	8-82-122	9		
		PHENOLIC	ROLLER	1,250	8-81-222	8-82-222	9		
		CAST IRON	ROLLER	1,250	8-81-250	8-82-250	10		
		MOLDON POLYURETHANE / ALUMINUM CORE	ROLLER	1,250	8-81-720	8-82-720	10		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	1,250	8-81-720CI	8-82-720CI	10		
		SOLID ELASTOMER	ROLLER	1,250	8-81-760	8-82-760	10		
		SOLID ELASTOMER	PRECISION BALL	1,250	8-81-770	8-82-770	10		
	2 1/4	HIGH MODULUS RUBBER DONUT*	BALL	450	8-81-600	8-82-600	7		

81 SERIES

Available in Grey (consult factory).



81SB Series

Kingpinless Style Swivel & Rigid Top Plate
Capacity to 1,500 pounds each





6-81SB-220P
(shown in photo)

FEATURES

- ✓ **Design:** Kingpinless style swivel raceway
- ✓ **Swivel Construction:** precision machined and induction hardened swivel raceway. Sealing cap welded to outer race assures protection from foreign material and keeps grease in raceway.
- ✓ **Finish:** bright zinc plating to resist rust and corrosion.
- ✓ **Axle:** 1/2" diameter.
- ✓ **Fork Legs:** 1/4" thick, 2" wide formed steel welded inside and out.
- ✓ **Zerk Grease Fitting:** swivel raceway.
- ✓ **Fork Leg Spacing:** 2-1/2"

CASTER OPTIONS

- ✓ **Side Lock Brake:** to order, add "SLB" to end of model number.  Right side brake optionally available – consult factory.
- ✓ **Swivel Lock / Bolt-On:**  Field installable 4-position swivel lock. To order specify swivel lock number **3091-22**. See page 92 for details.
- ✓ **Precision Ball Wheel Bearing:** Sealed precision ball bearing available for most wheels – consult factory.
- ✓ **Thread Guards:** See page 94 for thread guard availability.

Kingpinless Design

Features forged swivel section with 3/8" diameter carbon steel balls locked into a 2-3/8" diameter swivel raceway. Top plate and fork base are hot forged steel that has been induction hardened to ensure uniform depth of hardness in swivel raceways. They are forged from one piece of steel providing a superior raceway construction for side thrust, impact and shock conditions.

MOUNTING

Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	2	ADVANTAGE TPR / FLAT	ROLLER	350	4-81SB-220GF	4-82-220GF	6	5 5/8	3 9/16
		POLYOLEFIN	ROLLER	500	4-81SB-532	4-82-532	5		
		POLYLOC / BLUE	ROLLER	600	4-81SB-220P	4-82-720	6		
		MOLDON POLYURETHANE / ALUM. CORE	ROLLER	600	4-81SB-720	4-82-220P	6		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	700	4-81SB-720CI	4-82-720CI	8		
		CAST IRON	ROLLER	750	4-81SB-250	4-82-250	8		
		PHENOLIC	ROLLER	800	4-81SB-222	4-82-222	6		
		SOLID ELASTOMER	PRECISION BALL	1,250	4-81SB-770	4-82-770	6		
5	2	ADVANTAGE TPR / FLAT	ROLLER	375	5-81SB-220GF	5-82-220GF	6	6 1/2	3 7/8
		POLYOLEFIN	ROLLER	650	5-81SB-532	5-82-532	5		
		POLYLOC / BLUE	ROLLER	700	5-81SB-220P	5-82-220P	5		
		CAST IRON	ROLLER	800	5-81SB-250	5-82-250	9		
		MOLDON POLYURETHANE / ALUM. CORE	ROLLER	900	5-81SB-720	5-82-720	6		
		PHENOLIC	ROLLER	1,000	5-81SB-222	5-82-222	6		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	1,050	5-81SB-720CI	5-82-720CI	6		
		SOLID ELASTOMER	PRECISION BALL	1,250	5-81SB-770	5-82-770	6		
6	2	ADVANTAGE TPR / FLAT	ROLLER	600	6-81SB-220GF	6-82-220GF	6	7 1/2	4 9/16
		POLYOLEFIN	ROLLER	700	6-81SB-532	6-82-532	6		
		POLYLOC / BLUE	ROLLER	800	6-81SB-220P	6-82-220P	6		
		MOLDON POLYURETHANE / ALUM. CORE	ROLLER	1,000	6-81SB-720	6-82-720	7		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	1,200	6-81SB-720CI	6-82-720CI	9		
		CAST IRON	ROLLER	1,200	6-81SB-250	6-82-250	9		
		PHENOLIC	ROLLER	1,200	6-81SB-222	6-82-222	7		
		SOLID ELASTOMER	PRECISION BALL	1,250	6-81SB-770	6-82-770	7		
8	2	ADVANTAGE TPR / FLAT	ROLLER	675	8-81SB-220GF	8-82-220GF	7	9 1/2	6
		POLYOLEFIN	ROLLER	900	8-81SB-532	8-82-532	7		
		POLYLOC / BLUE	ROLLER	1,000	8-81SB-220P	8-82-220P	7		
		MOLDON POLYURETHANE / ALUM. CORE	ROLLER	1,200	8-81SB-720	8-82-720	9		
		SOLID ELASTOMER	PRECISION BALL	1,250	8-81SB-770	8-82-770	9		
		PHENOLIC	ROLLER	1,400	8-81SB-222	8-82-222	9		
		MOLDON POLYURETHANE / CAST IRON CORE	ROLLER	1,500	8-81SB-720CI	8-82-720CI	12		
		CAST IRON	ROLLER	1,500	8-81SB-250	8-82-250	12		

Pneumatic

Swivel & Rigid Top Plate

Capacity to 470 pounds each

FEATURES

- ✓ **Wheel:** premium quality designed to eliminate lobe and wobble while rolling.
- ✓ **Finish:** bright zinc, brass or chrome plating to resist rust and corrosion.
- ✓ **Swivel Grease Seal:** standard on polished brass models.
- ✓ **Swivel Construction:** double ball bearing.
- ✓ **Axle:** 1/2" diameter.
- ✓ **King Pin:** 5/8" steel rivet, hydraulically upset.
- ✓ **Zerk Grease Fitting:** swivel raceway.
- ✓ **Fork Leg Spacing:**
 - 8" wheel 3".
 - 10" wheel 4".

CASTER OPTIONS

- ✓ **VertiLoc Brake:** to order, add "VL" to end of model number.



8-W82-940G
(shown in photo)

8-W81-940
(shown in photo)

NEW

MOUNTING

Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
4" x 4-1/2"	2-5/8" x 3-5/8" or 3" x 3"	3/8"

Zinc Plated

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
8	2.80/4	BLACK PNEUMATIC RUBBER	BALL	310	8-W81-940	8-W82-940	8	9 1/2	6 1/8
		GREY PNEUMATIC RUBBER	BALL	310	8-W81-940G	8-W82-940G	8	9 1/2	6 1/8
10	4.10/4	BLACK PNEUMATIC RUBBER	BALL	470	10-W87-940	10-W88-940	9	13	7 5/8



8-W81-940-GSPB
(shown in photo)

NEW

Polished Brass

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
8	2.80/4	BLACK PNEUMATIC RUBBER	BALL	310	8-W81-940-1GSPB	8-W82-940-1GSPB	8	9 1/2	6 1/8



8-W81-940-1PC
(shown in photo)

NEW

Polished Chrome

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
8	2.80/4	BLACK PNEUMATIC RUBBER	BALL	310	8-W81-940-1PC	8-W82-940-1PC	8	9 1/2	6 1/8

Pneumatic Casters

S30 Series

Stainless Steel Top Plate





Capacity to 325 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including ball bearings, axle, nut, spanner bushing and dust cap are stainless steel.

FEATURES

- ✓ **Finish:** Stainless steel
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 3/8" diameter stainless steel axle with lock nut.
- ✓ **King Pin:** 1/2" stainless steel rivet, hydraulically upset.
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS

- ✓ **PosiLoc® Brake:** stainless steel construction; to order, add "PL" to end of model number. 
- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Lock:** Locks caster in trailing position at 180° while wheel spins freely. To order specify "1PSL". 
- ✓ **Swivel Grease Seal:** Includes zerk in the dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.
- ✓ **Optional Top Plate Sizes:** variety of top plate sizes available – consult factory.



5-S31-121 PLT 2
(shown in photo)

5-S30-213GD PLT 2
(shown in photo)

MOUNTING OPTIONS

Top Plate Sizes (swivel & rigid): to order, add Plate Mounting Code to end of model number (Example: 5-S30-314G PLT 2).

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 2	2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"
PLT 3	3-1/8" x 4-1/8"	2-3/8" x 3-7/16"	5/16"
PLT 5	3-3/4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

WHEEL OPTIONS



Advantage TPR Round Advantage TPR Flat Welded Disc Polyurethane Polyolefin Phenolic PolyLoc Grey Hi-Temp Resin

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	250	4-S30-314GD	4-S31-314GD	2-1/4	5 1/16	3 1/2
		ADVANTAGE TPR / FLAT	DELRIN	300	4-S30-314GF	4-S31-314GF	2-1/4		
		POLYOLEFIN	SS SLEEVE	300	4-S30-513	4-S31-513	2-1/4		
		POLYLOC / GREY	DELRIN	300	4-S30-314G	4-S31-314G	2-1/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	4-S30-121	4-S31-121	2-1/4		
		HI-TEMP RESIN	PLAIN	300	4-S30-521HT	4-S31-121HT	2-1/4		
5	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	250	5-S30-314GD	5-S31-314GD	2-3/4	6 1/8	4
		ADVANTAGE TPR / ROUND	SS BALL	250	5-S30-213GD	5-S31-213GD	2-3/4		
		POLYOLEFIN	SS SLEEVE	300	5-S30-513	5-S31-513	2-3/4		
		WELDED DISC / POLYURETHANE	SS SLEEVE	300	5-S30-113P	5-S31-113P	2-3/4		
		POLYLOC / GREY	DELRIN	300	5-S30-314G	5-S31-314G	2-3/4		
		POLYLOC / GREY	SS BALL	300	5-S30-213G	5-S31-213G	2-3/4		
	ADVANTAGE TPR / FLAT	DELRIN	325	5-S30-314GF	5-S31-314GF	2-3/4			
	1 1/2	PHENOLIC	SS SLEEVE	300	5-S30-121	5-S31-121	2-3/4		
		HI-TEMP RESIN	PLAIN	325	5-S30-521NHT	5-S31-NHT	2-3/4		
6	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	300	6-S30-314GD	6-S31-314GD	3-1/4	7 3/16	4 1/2
		POLYOLEFIN	SS SLEEVE	300	6-S30-521	6-S31-521	3-1/4		
		POLYLOC / GREY	SS BALL	300	6-S30-213G	6-S31-213G	3-1/4		
		POLYLOC / GREY	DELRIN	300	6-S30-314G	6-S31-314G	3-1/4		
	PHENOLIC	SS SLEEVE	300	6-S30-121	6-S31-121	3-1/4			
1 1/2									



S32 Series

Stainless Steel Round Stem

Capacity to 325 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including top plate or stems ball bearings, axle, nut, spanner bushing and dust cap are stainless steel.






5-S32-113P
(shown in photo)

FEATURES


- ✓ **Finish:** Stainless steel
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 3/8" diameter stainless steel axle with lock nut.
- ✓ **King Pin:** 1/2" stainless steel rivet, hydraulically upset.
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS

- ✓ **PosiLoc® Brake:** stainless steel construction; to order, add "PL" to end of model number. 
- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Grease Seal:** Includes zerk in the dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.

MOUNTING

Standard Round Stem Size: 3/4" diameter x 2" long with three drilled holes 1/4" diameter.

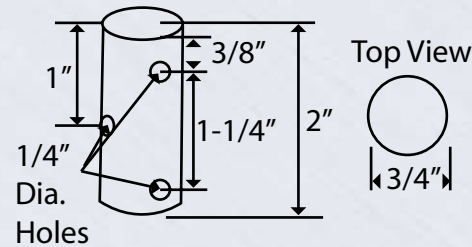

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Round Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	250	4-S32-314GD	2-1/4	4 15/16	3 1/2
		ADVANTAGE TPR / FLAT	DELRIN	300	4-S32-314GF	2-1/4		
		POLYOLEFIN	SS SLEEVE	300	4-S32-513	2-1/4		
		POLYLOC / GREY	DELRIN	300	4-S32-314G	2-1/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	4-S32-121	2-1/4		
		HI-TEMP RESIN	PLAIN	300	4-S32-521HT	2-1/4		
5	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	250	5-S32-314GD	2-3/4	6	4
		ADVANTAGE TPR / ROUND	SS BALL	250	5-S32-214GD	2-3/4		
		POLYOLEFIN	SS SLEEVE	300	5-S32-513	2-3/4		
		WELDED DISC / POLYURETHANE	SS SLEEVE	300	5-S32-113P	2-3/4		
		POLYLOC / GREY	DELRIN	300	5-S32-314G	2-3/4		
		POLYLOC / GREY	SS BALL	300	5-S32-214G	2-3/4		
		ADVANTAGE TPR / FLAT	DELRIN	325	5-S32-314GF	2-3/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	5-S32-121	2-3/4		
		HI-TEMP RESIN	PLAIN	325	5-S32-521NHT	2-3/4		
		6	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	300		
POLYOLEFIN	SS SLEEVE			300	6-S32-521	3-1/4		
POLYLOC / GREY	SS BALL			300	6-S32-213G	3-1/4		
POLYLOC / GREY	DELRIN			300	6-S32-314G	3-1/4		
1 1/2	PHENOLIC		SS SLEEVE	300	6-S32-121	3-1/4		

S32 STAINLESS SERIES



S34 Series

Stainless Steel Spring Ring Stem


Capacity to 325 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including ball bearings, axle, nut, spanner bushing and dust cap are stainless steel.

FEATURES

- ✓ **Finish:** Stainless steel
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 3/8" diameter stainless steel axle with lock nut.
- ✓ **King Pin:** 1/2" stainless steel rivet, hydraulically upset.
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS

- ✓ **PosiLoc® Brake:** stainless steel construction; to order, add "PL" to end of model number. 
- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Grease Seal:** Includes zerk in the dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.
- ✓ **Optional Stem Sizes:** variety of stem sizes available – consult factory



5-S34-214G
(shown in photo)

MOUNTING

Standard Spring Ring Stem Size:
.845" diameter x 2-3/16" long

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Ring Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	250	4-S34-314GD	2-1/4	4 15/16	3 1/2
		ADVANTAGE TPR / FLAT	DELRIN	300	4-S34-314GF	2-1/4		
		POLYOLEFIN	SS SLEEVE	300	4-S34-513	2-1/4		
		POLYLOC / GREY	DELRIN	300	4-S34-314G	2-1/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	4-S34-121	2-1/4		
		HI-TEMP RESIN	PLAIN	300	4-S34-521HT	2-1/4		
5	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	250	5-S34-314GD	2-3/4	6	4
		ADVANTAGE TPR / ROUND	SS BALL	250	5-S34-214GD	2-3/4		
		POLYOLEFIN	SS SLEEVE	300	5-S34-513	2-3/4		
		WELDED DISC / POLYURETHANE	SS SLEEVE	300	5-S34-113P	2-3/4		
		POLYLOC / GREY	DELRIN	300	5-S34-314G	2-3/4		
		POLYLOC / GREY	SS BALL	300	5-S34-214G	2-3/4		
		ADVANTAGE TPR / FLAT	DELRIN	325	5-S34-314GF	2-3/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	5-S34-121	2-3/4		
		HI-TEMP RESIN	PLAIN	325	5-S34-521NHT	2-3/4		
6	1 1/4	ADVANTAGE TPR / ROUND	DELRIN	300	6-S34-314GD	3-1/4	7 1/16	4 1/2
		POLYOLEFIN	SS SLEEVE	300	6-S34-521	3-1/4		
		POLYLOC / GREY	SS BALL	300	6-S34-213G	3-1/4		
		POLYLOC / GREY	DELRIN	300	6-S34-314G	3-1/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	6-S34-121	3-1/4		



S36 Series

Stainless Steel Threaded Stem




Capacity to 325 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including ball bearings, axle, nut, spanner bushing and dust cap are stainless steel.

FEATURES

- ✓ **Finish:** Stainless steel
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 3/8" diameter stainless steel axle with lock nut.
- ✓ **King Pin:** 1/2" stainless steel rivet, hydraulically upset.
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS

- ✓ **PosiLoc® Brake:** stainless steel construction; to order, add "PL" to end of model number. 
- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Grease Seal:** Includes zerk in the dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.
- ✓ **Optional Stem Sizes:** variety of stem sizes available – consult factory



5-S36-513
(shown in photo)

MOUNTING

Standard Threaded Stem Size:
1/2" diameter – 13 x 1-1/2" long

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	1 1/4	ADVANTAGE TPR / ROUND	DELTRIN	250	4-S36-314GD	2-1/4	4 15/16	3 1/2
		ADVANTAGE TPR / FLAT	DELTRIN	300	4-S36-314GF	2-1/4		
		POLYOLEFIN	SS SLEEVE	300	4-S36-513	2-1/4		
		POLYLOC / GREY	DELTRIN	300	4-S36-314G	2-1/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	4-S36-121	2-1/4		
		HI-TEMP RESIN	PLAIN	300	4-S36-521HT	2-1/4		
5	1 1/4	ADVANTAGE TPR / ROUND	DELTRIN	250	5-S36-314GD	2-3/4	6	4
		ADVANTAGE TPR / ROUND	SS BALL	250	5-S36-214GD	2-3/4		
		POLYOLEFIN	SS SLEEVE	300	5-S36-513	2-3/4		
		WELDED DISC / POLYURETHANE	SS SLEEVE	300	5-S36-113P	2-3/4		
		POLYLOC / GREY	DELTRIN	300	5-S36-314G	2-3/4		
		POLYLOC / GREY	SS BALL	300	5-S36-214G	2-3/4		
	1 1/2	ADVANTAGE TPR / FLAT	DELTRIN	325	5-S36-314GF	2-3/4		
		PHENOLIC	SS SLEEVE	300	5-S36-121	2-3/4		
		HI-TEMP RESIN	PLAIN	325	5-S36-521NHT	2-3/4		
6	1 1/4	ADVANTAGE TPR / ROUND	DELTRIN	300	6-S36-314GD	3-1/4	7 1/16	4 1/2
		POLYOLEFIN	SS SLEEVE	300	6-S36-521	3-1/4		
		POLYLOC / GREY	SS BALL	300	6-S36-213G	3-1/4		
		POLYLOC / GREY	DELTRIN	300	6-S36-314G	3-1/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	6-S36-121	3-1/4		

S36 STAINLESS SERIES

S40 Series

Stainless Steel Expanding Adapter




Capacity to 325 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including ball bearings, axle, nut, spanner bushing and dust cap are stainless steel.

FEATURES

- ✓ **Finish:** Stainless steel
- ✓ **Dust Cap:** all swivel models feature dust cap which protects swivel raceway bearings and improves performance.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 3/8" diameter stainless steel axle with lock nut.
- ✓ **King Pin:** 1/2" stainless steel, hydraulically upset.
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS

- ✓ **PosiLoc® Brake:** stainless steel construction; to order, add "PL" to end of model number. 
- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Grease Seal:** Includes zerk in the dust cap. To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.
- ✓ **Optional Stem Sizes:** variety of stem sizes available – consult factory



5-S40-214GD 19A
(shown in photo)

MOUNTING

Rubber bushing expands inside of tubing as 3/4" nut beneath lower raceway is turned with wrench. Plastic bushing on bottom of stem provides stability for stem inside of tubing for tight, permanent fit.

See chart at right for adapter sizes and matching tube sizes. To order, add adapter number to end of model number (example: 5-S40-214GD 19A).

Threaded stem size (less adapter): 1/2" diameter x 2- 3/4" long.

Adapter Number	Tubing I.D. (inches)
9	3/4"
11*	7/8"
13	1"
15	1-1/8"
17 B	1-3/16"
19 C	1-3/8"
19 A*	1-1/2"
21	1-7/8"

* Features stainless steel stem, washer and knurled nut. All other adapters feature zinc plated washer and knurled nut.

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Expanding Adapter Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	1 1/4	ADVANTAGE TPR / ROUND	DELRLIN	250	4-S40-314GD	2-1/4	4 15/16	3 1/2
		ADVANTAGE TPR / FLAT	DELRLIN	300	4-S40-314GF	2-1/4		
		POLYOLEFIN	SS SLEEVE	300	4-S40-513	2-1/4		
		POLYLOC / GREY	DELRLIN	300	4-S40-314G	2-1/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	4-S40-121	2-1/4		
		HI-TEMP RESIN	PLAIN	300	4-S40-521HT	2-1/4		
5	1 1/4	ADVANTAGE TPR / ROUND	DELRLIN	250	5-S40-314GD	2-3/4	6	4
		ADVANTAGE TPR / ROUND	SS BALL	250	5-S40-214GD	2-3/4		
		POLYOLEFIN	SS SLEEVE	300	5-S40-513	2-3/4		
		WELDED DISC / POLYURETHANE	SS SLEEVE	300	5-S40-113P	2-3/4		
		POLYLOC / GREY	DELRLIN	300	5-S40-314G	2-3/4		
		POLYLOC / GREY	SS BALL	300	5-S40-214G	2-3/4		
		ADVANTAGE TPR / FLAT	DELRLIN	325	5-S40-314GF	2-3/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	5-S40-121	2-3/4		
		HI-TEMP RESIN	PLAIN	325	5-S40-521NHT	2-3/4		
6	1 1/4	ADVANTAGE TPR / ROUND	DELRLIN	300	6-S40-314GD	3-1/4	7 1/16	4 1/2
		POLYOLEFIN	SS SLEEVE	300	6-S40-521	3-1/4		
		POLYLOC / GREY	SS BALL	300	6-S40-213G	3-1/4		
		POLYLOC / GREY	DELRLIN	300	6-S40-314G	3-1/4		
	1 1/2	PHENOLIC	SS SLEEVE	300	6-S40-121	3-1/4		



S81 Series

Stainless Steel Top Plate

Capacity to 1,250 pounds each

Polished grade 304 stainless steel designed to prevent rust and corrosion in the most demanding wet, damp and corrosive environments. Stainless steel is impervious to repeated washings, thereby reducing maintenance and providing longer caster life. All component metal parts including ball bearings, axle, nut, and spanner bushing are stainless steel.

FEATURES

- ✓ **Finish:** Stainless steel
- ✓ **Design:** Stainless steel top plate and fork legs, case hardened for strength.
- ✓ **Swivel Construction:** stainless steel grade 440 ball bearings with hardened double raceway construction. Bearings are magnetic.
- ✓ **Axle:** 1/2" diameter stainless steel bolt with lock nut with zerk in raceway.
- ✓ **King Pin:** 5/8" stainless steel rivet, hydraulically upset.
- ✓ **Fork Leg Spacing:** 2-1/2"
- ✓ **Grease Temperature Range:** -45°F to +260°F

CASTER OPTIONS

- ✓ **VertiLoc® Brake:** stainless steel construction; to order, add "VL" to end of model number. 
- ✓ **Swivel Lock / Bolt-On:** Field installable 4- position stainless steel swivel lock. 
- To order specify swivel lock number **3091-17**. See page 92 for details.
- ✓ **Stainless Steel Roller Bearing:** to order, add "SRB" to end of model number (Example: 6-S81-320GF SRB).
- ✓ **Swivel Grease Seal:** To order, add "GS" to end of model number. 
- ✓ **Thread Guards:** See page 94 for thread guard availability.



6-S82-531
(shown in photo)

6-S81-320GF
(shown in photo)

MOUNTING

Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
4" x 4 -1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

WHEEL OPTIONS



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number	Rigid Caster Model Number	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
5	2	ADVANTAGE TPR / FLAT	DELRLN	375	5-S81-320GF	5-S82-320GF	5-1/2	6 1/2	4 5/16
		POLYOLEFIN	PLAIN	650	5-S81-531	5-S82-531	5-1/2		
		POLYLOC / BLUE	DELRLN	700	5-S81-320P	5-S82-320P	5-1/2		
		MOLDON POLYURETHANE / ALUM. CORE	DELRLN	900	5-S81-721	5-S82-721	5-1/2		
		SOLID ELASTOMER	DELRLN	1,000	5-S81-761	5-S82-761	5-1/2		
		PHENOLIC	PLAIN	1,000	5-S81-122	5-S82-122	5-1/2		
		ADVANTAGE TPR / ROUND	DELRLN	450	6-S81-320GD	6-S82-320GD	6-1/2		
ADVANTAGE TPR / FLAT	DELRLN	600	6-S81-320GF	6-S82-320GF	6-1/2				
6	2	POLYOLEFIN	PLAIN	700	6-S81-531	6-S82-531	6-1/2	7-1/2	5-1/16
		POLYLOC / BLUE	DELRLN	800	6-S81-320P	6-S82-320P	6-1/2		
		MOLDON POLYURETHANE / ALUM. CORE	DELRLN	900	6-S81-721	6-S82-721	6-1/2		
		SOLID ELASTOMER	DELRLN	1,100	6-S81-761	6-S82-761	6-1/2		
		PHENOLIC	PLAIN	1,200	6-S81-122	6-S82-122	6-1/2		
		ADVANTAGE TPR / ROUND	DELRLN	450	8-S81-320GD	8-S82-320GD	8		
		ADVANTAGE TPR / FLAT	DELRLN	675	8-S81-320GF	8-S82-320GF	8		
POLYOLEFIN	PLAIN	900	8-S81-531	8-S82-531	8				
8	2	POLYLOC / BLUE	DELRLN	1,000	8-S81-320P	8-S82-320P	8	9-1/2	6-1/2
		SOLID ELASTOMER	DELRLN	1,200	8-S81-761	8-S82-761	8		
		MOLDON POLYURETHANE / ALUM. CORE	DELRLN	1,200	8-S81-721	8-S82-721	8		
		PHENOLIC	PLAIN	1,250	8-S81-122	8-S82-122	8		
		PHENOLIC	PLAIN	1,250	8-S81-122	8-S82-122	8		

S81 STAINLESS SERIES

Cushion / Solid Rubber Wheels

Capacity up to 260 lbs. each



5-105
(shown in photo)

FEATURES

Cushion rubber is non-marking and permanently bonded to a hard rubber wheel core. This economical wheel is recommended for light to medium duty loads where noise reduction, floor protection and durability are required.

- ✓ **Standard Color / Finish:** Black
- ✓ **Optional Color / Finish:** Grey-consult factory
- ✓ **Neoprene:** Consult factory
- ✓ **Tread Hardness:** 75 (± 5) Shore A Scale
- ✓ **Temperature Range:** -30° F to + 160° F

Grey Cushion Rubber Wheels

All black rubber wheels shown in chart above are optionally available in grey. Please consult factory for minimum order quantities and delivery information.



5-105G
(shown in photo)



5-105C
(shown in photo)

FEATURES

Conductive wheels are designed to dissipate static build-up in rolling carts in the computer, electronics and medical industries. Jarvis conductive wheels feature a cushion ride combined with tested durability in a wide variety of operating conditions.

- ✓ **Standard Color / Finish:** Black
- ✓ **Tread Hardness:** 75 (± 5) Shore A Scale
- ✓ **Temperature Range:** -30° F to + 160° F

Black Rubber Wheels

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
1 5/8	13/16	DELRIN	75	1-101	1/4	15/16	1/16
2	13/16	DELRIN	75	2-101	1/4	15/16	1/16
2 1/2	13/16	DELRIN	80	2-1/2 -101	1/4	15/16	1/8
	1 1/4	DELRIN	140	2-1/2 -105	1/2	1-1/2	3/8
3	13/16	DELRIN	75	3 -101	1/4	15/16	1/4
	15/16	DELRIN	125	3 -103	5/16	1-1/4	5/16
	15/16	BALL	125	3 -132	5/16	1-1/4	5/16
	1 1/4	DELRIN	150	3 -105	1/2	1-1/2	9/16
1 1/4	BALL	150	3 -152	1/2	1-1/2	9/16	
3 1/2	1 1/4	DELRIN	160	3-1/2 -105	1/2	1-1/2	3/4
4	15/16	DELRIN	125	4-103	5/16	1-1/4	9/16
	1 1/4	DELRIN	170	4-105	1/2	1-1/2	7/8
	1 5/8	SINTERED	225	4-109	5/8	1-15/16	1-1/4
	1 5/8	ROLLER	225	4-209	5/8	1-15/16	1-1/4
5	15/16	DELRIN	125	5-103	5/16	1-1/4	1
	1 1/4	DELRIN	200	5-105	1/2	1-1/2	1-1/4
	1 1/4	BALL	200	5-152	1/2	1-1/2	1-1/4
	1 5/8	SINTERED	260	5-109	5/8	1-15/16	1-3/4
	1 5/8	ROLLER	260	5-209	5/8	1-15/16	1-3/4
	1 5/8	DELRIN	260	5-309	5/8	2-1/16	1-3/4
6	1 9/32	DELRIN	220	6-105	1/2	1-1/2	1-3/4
	1 1/4	BALL	220	6-152	1/2	1-1/2	1-3/4

Conductive Black Rubber Wheels

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
2	13/16	SINTERED	75	2-101C	1/4	15/16	1/16
2 1/2	13/16	SINTERED	80	2-1/2 -101C	1/4	15/16	1/8
3	13/16	SINTERED	75	3 -101C	1/4	15/16	1/4
5	1 1/4	SINTERED	200	5-105C	1/2	1-1/2	1-1/4
6	1 9/32	SINTERED	220	6-105C	1/2	1-1/2	1-3/4



Cushion / Solid Rubber Wheels

With Decorative Side Plates

Capacity up to 220 lbs. each



FEATURES

These cushion rubber wheels feature metal decorative side plates that make most any cart or mobile equipment more attractive.

- ✓ **Standard Color / Finish:** Black or Grey
- ✓ **Tread Hardness:** 75 (± 5) Shore A Scale
- ✓ **Temperature Range:** -30° F to + 160° F

Black / Flat Tread

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
3 1/2	1 1/4	BALL	160	3-1/2 -452	1/2	1-1/2	3/4
4	1 1/8	BALL	165	4-452	1/2	1-1/2	7/8
5	1 1/8	BALL	200	5-452	1/2	1-1/2	1-1/4
	1 1/8	BALL	200	5-452C *	1/2	1-1/2	1-1/4

Grey / Flat Tread

4	1 1/8	BALL	165	4-452G	1/2	1-1/2	7/8
5	1 1/8	BALL	200	5-452G	1/2	1-1/2	1-1/4

Black / Round Tread

4	15/16	DELRIN	125	4-433	5/16	1-1/4	9/16
5	15/16	DELRIN	125	5-433	5/16	1-1/4	1
	1 1/4	BALL	200	5-500	1/2	1-1/2	1-1/4
6	1 1/4	BALL	220	6-500	1/2	1-1/2	1-3/4

Grey / Round Tread

3	15/16	DELRIN	125	3-433G	5/16	1-1/4	5/16
5	1 1/4	BALL	200	5-500G	1/2	1-1/2	1-1/4
6	1 1/4	BALL	220	6-500G	1/2	1-1/2	1-3/4

*Conductive Wheel.

Hard / Solid Rubber Wheels

Capacity up to 400 lbs. each



FEATURES

Hard rubber tread wheels feature one-piece molded construction. These wheels have a higher load capacity than cushion rubber wheels and will not flat-spot while sitting under load (compression set). They are non-marking and offer proven performance under a wide variety of institutional and industrial uses.

- ✓ **Standard Color / Finish:** Black
- ✓ **Tread Hardness:** 75 (± 5) Shore D Scale
- ✓ **Temperature Range:** -30° F to + 160° F

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
1 5/8	13/16	DELRIN	100	1-102	1/4	15/16	1/16
2	13/16	DELRIN	100	2-102	1/4	15/16	1/16
2 1/2	13/16	DELRIN	100	2-1/2 -102	1/4	15/16	1/8
	1 1/4	DELRIN	210	2-1/2 -106	1/2	1-1/2	3/8
3	13/16	DELRIN	100	3 -102	1/4	15/16	1/4
	15/16	DELRIN	150	3 -104	5/16	1-1/4	5/16
	15/16	BALL	150	3 -142	5/16	1-1/4	5/16
	1 1/4	DELRIN	220	3 -106	1/2	1-1/2	9/16
3 1/2	1 1/4	DELRIN	230	3-1/2 -106	1/2	1-1/2	3/4
	1 1/4	BALL	230	3-1/2 -462 *	1/2	1-1/2	3/4
4	15/16	DELRIN	150	4-104	5/16	1-1/4	9/16
	1 1/4	DELRIN	250	4-106	1/2	1-1/2	7/8
	1 5/8	SINTERED	300	4-110	5/8	1-15/16	1-1/4
	1 5/8	ROLLER	300	4-210	5/8	1-15/16	1-1/4
5	15/16	DELRIN	150	5-104	5/16	1-1/4	1
	1 1/8	BALL	280	5-462*	1/2	1-1/2	1-1/4
	1 1/8	BALL	280	5-462*	1/2	1-1/2	1-1/4
	1 1/4	DELRIN	280	5-106	1/2	1-1/2	1-1/4
	1 1/4	BALL	280	5-162	1/2	1-1/2	1-1/4
	1 5/8	SINTERED	400	5-110	5/8	1-15/16	1-3/4
	1 5/8	ROLLER	400	5-210	5/8	1-15/16	1-3/4
	1 5/8	DELRIN	400	5-310	5/8	2-1/16	1-3/4
6	1 9/32	DELRIN	300	6-106	1/2	1-1/2	1-3/4
	1 1/4	BALL	300	6-162	1/2	1-1/2	1-3/4

*Wheel has Decorative Side Plates

WHEELS

Welded Disc Rubber Wheels

Capacity up to 250 lbs. each



5-113
(shown in photo)



5-113G
(shown in photo)

FEATURES

Jarvis welded disc rubber wheels offer designers an attractive alternative for foodservice equipment, medical products, point-of-purchase displays and other institutional applications. These wheels feature a black or grey neoprene rubber tread permanently compressed between two steel discs which are welded together. For improved appearance, the center wheel discs

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
-------------------------	----------------------	---------	-------------------	--------------	-----------------------	---------------------	-----------------------------

Black Tread Models

3 1/2	1 1/4	BALL	200	3-1/2-113	3/8	1-5/8	1
4	1 1/4	BALL	200	4-113	3/8	1-5/8	1-1/8
5	1 1/4	BALL	200	5-113	3/8	1-5/8	1-1/2
6	1 1/4	BALL	250	6-113	3/4	1-1/2	2-3/8

Grey Tread Models

3 1/2	1 1/4	BALL	200	3-1/2-113G	3/8	1-5/8	1
4	1 1/4	BALL	200	4-113G	3/8	1-5/8	1-1/8
5	1 1/4	BALL	200	5-113G	3/8	1-5/8	1-1/2
6	1 1/4	BALL	250	6-113G	3/4	1-1/2	2-3/8

are plated with a durable bright nickel plating. Welded disc rubber wheels are quiet rolling and offer excellent floor protection.

- ✓ **Standard Color / Finish:** Black or grey tread on bright nickel plated wheel core
- ✓ **Tread Hardness:** 75 (± 5) Shore A Scale
- ✓ **Temperature Range:** -40° F to + 160° F

Stainless Steel Wheel Discs

To order, add "SS" to suffix of model number (Example: 5-113GSS).

Welded Disc Polyurethane Wheels

Capacity up to 300 lbs. each



5-113P
(shown in photo)

FEATURES

Welded Disc Polyurethane wheels feature a dark blue polyurethane tire molded to fit permanently between two bright nickel plated steel discs which are welded together. They provide greater load capacity than similar style rubber tread models and are able to withstand impacts while offering maximum floor protection. Polyurethane tread wheels are known for their long service life and durability in a wide range of applications from institutional equipment to retail applications.

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
-------------------------	----------------------	---------	-------------------	--------------	-----------------------	---------------------	-----------------------------

3 1/2	1 1/4	BALL	250	3-1/2-113P	3/8	1-5/8	1
4	1 1/4	BALL	275	4-113P	3/8	1-5/8	1-1/8
5	1 1/4	BALL	300	5-113P	3/8	1-5/8	1-1/2
6	1 1/4	BALL	300	6-113P	3/4	1-1/2	2

- ✓ **Standard Color / Finish:** Blue tread on bright nickel plated wheel core
- ✓ **Tread Hardness:** 95 (± 5) Shore A Scale
- ✓ **Temperature Range:** -40° F to + 180° F

Stainless Steel Wheel Discs

To order, add "SS" to suffix of model number (Example: 5-113PSS).



PolyLoc™ / Blue Polyurethane Wheels

Capacity up to 350 lbs. each



5-213P
(shown in photo)

FEATURES

For those looking for a brighter, more eye-appealing wheel, Jarvis PolyLoc blue tread wheels are a natural choice. These models feature a durable dark blue polyurethane crowned tread mechanically locked to a solid polyolefin wheel core. Tread is molded in, around and through a ribbed wheel core to prevent tread separation when exposed to conditions of water and solvents.

These models are equipped with single row precision ball bearings for rolling ease. Built in hub caps are color coordinated to match the wheel tread for a very attractive, yet functional and durable wheel.

- ✓ **Standard Color / Finish:** Dark blue tread on light grey wheel core
- ✓ **Tread Hardness:** 95 (± 5) Shore A Scale
- ✓ **Temperature Range:** -30° F to + 180° F

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
3 1/2	1 1/4	Ball	250	3-1/2-213P	3/8	1-5/8	1/2
	1	Ball	150	4-212P	5/16	1-1/4	1/2
4	1 1/4	Ball	275	4-213P	3/8	1-5/8	3/4
	1	Ball	160	5-212P	5/16	1-1/4	3/4
5	1 1/4	Ball	300	5-213P	3/8	1-5/8	1-1/8
	1 1/4	Ball	350	6-213P	3/8	1-5/8	1-1/4

PolyLoc™ / Grey Polyurethane Wheels

Capacity up to 350 lbs. each



5-213G
(shown in photo)

FEATURES

PolyLoc wheels feature a durable grey polyurethane tread mechanically locked to a solid polyolefin wheel core. Tread is molded in, around and through a ribbed wheel core to prevent tread separation (de-bonding) when exposed to conditions of water and solvents.

PolyLoc wheels are virtually indestructible and offer a long service life. These models are equipped with single row precision ball bearings for rolling ease. Built in hub caps are color coordinated to match the wheel tread for a very attractive, yet functional wheel.

These models are equipped with single row precision ball bearings for rolling ease. Built in hub caps are color coordinated to match the wheel tread for a very attractive, yet functional and durable wheel.

- ✓ **Standard Color / Finish:** Dark grey tread on light grey wheel core
- ✓ **Tread Hardness:** 95 (± 5) Shore A Scale
- ✓ **Temperature Range:** -30° F to + 180° F

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
3 1/2	1 1/4	Ball	250	3-1/2-213G	3/8	1-5/8	1/2
	1 1/4	Delrin	250	3-1/2-314G	1/2	1-1/2	1/2
4	1	Delrin	150	4-211G	5/16	1-1/4	1/2
		Ball	150	4-212G	5/16	1-1/4	1/2
	1 1/4	Ball	275	4-213G	3/8	1-5/8	3/4
		Delrin	275	4-314G	1/2	1-1/2	3/4
5	1	Delrin	160	5-211G	5/16	1-1/4	3/4
		Ball	160	5-212G	5/16	1-1/4	3/4
	1 1/4	Ball	300	5-213G	3/8	1-5/8	1-1/8
		Delrin	300	5-314G	1/2	1-1/2	1-1/8
6	1 1/4	Ball	350	6-213G	3/8	1-5/8	1-1/4
		Delrin	350	6-314G	1/2	1-1/2	1-1/4

- ✓ **Standard Color / Finish:** Dark grey tread on light grey wheel core
- ✓ **Tread Hardness:** 95 (± 5) Shore A Scale
- ✓ **Temperature Range:** -30° F to + 180° F

WHEELS

PolyLoc™ / Blue Polyurethane Wheels

Capacity up to 1,000 lbs. each



6-220P
(shown in photo)

FEATURES

Attractive blue polyurethane is mechanically locked to grey polyolefin wheel core for lasting performance in demanding applications. The tread will not separate or de-bond under extreme water or liquid conditions, and it offers excellent abrasion resistance. Sealed roller bearings are designed to keep water and contaminants out and lubrication in for long service life.

- ✓ **Standard Color / Finish:** Dark blue tread on light grey wheel core
- ✓ **Tread Hardness:** 95 (± 5) Shore A Scale
- ✓ **Temperature Range:** -30° F to + 180° F

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
4	2	Roller	600	4-220P	3/4	2-3/8	1
5	1 1/2	Roller	500	5-215P	3/4	2	1-1/4
	2	Roller	750	5-220P	3/4	2-3/8	1-1/2
		Delrin	750	5-320P	3/4	2-3/8	1-1/2
6	1 1/2	Roller	600	6-215P	3/4	2	1-3/4
	2	Roller	900	6-220P	3/4	2-3/8	2-3/4
		Delrin	900	6-320P	3/4	2-3/8	2-3/4
8	1 1/2	Roller	800	8-215P	3/4	2	2-1/4
	2	Roller	1,000	8-220P	3/4	2-3/8	2-3/4
		Delrin	1,000	8-320P	3/4	2-3/8	2-3/4

PolyLoc™ / Grey Polyurethane Wheels

Capacity up to 1,000 lbs. each



6-220G
(shown in photo)

FEATURES

Designed for a variety of institutional and industrial uses, this PolyLoc wheel features a grey polyurethane tread mechanically locked to a polyolefin wheel core. The thick, heavy duty wheel hub makes this model ideal for applications where shock and heavy loading are factors.

- ✓ **Standard Color / Finish:** Dark grey tread on light grey wheel core
- ✓ **Tread Hardness:** 95 (± 5) Shore A Scale
- ✓ **Temperature Range:** -30° F to + 180° F

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
4	2	Roller	600	4-220G	3/4	2-3/8	1-1/4
		Delrin	600	4-320G	3/4	2-3/8	1-1/4
5	1 1/2	Roller	500	5-215G	3/4	2	1-1/4
		Delrin	500	5-315G	3/4	2	1-1/4
	2	Roller	700	5-220G	3/4	2-3/8	1-1/2
		Delrin	700	5-320G	3/4	2-3/8	1-1/2
6	1 1/2	Roller	600	6-215G	3/4	2	1-3/4
		Delrin	600	6-315G	3/4	2	1-3/4
	2	Roller	800	6-220G	3/4	2-3/8	1-3/4
		Delrin	800	6-320G	3/4	2-3/8	1-3/4
8	1 1/2	Roller	800	8-215G	3/4	2	2-1/4
		Ball	800	8-215BG	3/4	2-1/4	2-1/4
		Delrin	800	8-315G	3/4	2	2-1/4
	2	Roller	1,000	8-220G	3/4	2-3/8	2-3/4
		Delrin	1,000	8-320G	3/4	2-3/8	2-3/4

WHEELS



Advantage™ TPR / Round Tread Wheels

Capacity up to 300 lbs. each



5-213GD
(shown in photo)

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
3 1/2	1 1/4	BALL	225	3-1/2-213GD	3/8	1-5/8	1/2
		DELTRIN	225	3-1/2-314GD	1/2	1-1/2	1/2
4	1 1/4	BALL	250	4-213GD	3/8	1-5/8	5/8
		DELTRIN	250	4-314GD	1/2	1-1/2	5/8
5	1 1/4	BALL	250	5-213GD	3/8	1-5/8	3/4
		DELTRIN	250	5-314GD	1/2	1-1/2	3/4
6	1 1/4	BALL	300	6-213GD	3/8	1-5/8	1
		DELTRIN	300	6-314GD	1/2	1-1/2	1

FEATURES

Advantage wheels feature a grey, special modulus TPR (Thermoplastic Rubber) round tread permanently bonded to a rugged polyolefin wheel core. These attractive crowned tread wheels offer superior rolling and maneuvering ease with high performance levels that exceed other tread materials. Thanks to their cushion ride, they are ideally suited for a wide variety of foodservice, healthcare and institutional applications. All Advantage wheels are non-marking which reduces unsightly marking and scuffing of floors. They are a good choice for use in wet or damp environments.

- ✓ **Standard Color / Finish:** Dark grey tread on light grey wheel core
- ✓ **Tread Hardness:** 65 (± 5) Shore A Scale
- ✓ **Temperature Range:** -40° F to + 180° F

CONDUCTIVE OPTION

Above wheel models optionally available with conductive non-marking grey tread. Consult factory.

Advantage™ TPR / Flat Tread Wheels

Capacity up to 325 lbs. each



5-213GF
(shown in photo)

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
3 1/2	1 1/4	BALL	225	3-1/2-213GF	3/8	1-5/8	1/2
		DELTRIN	225	3-1/2-314GF	1/2	1-1/2	1/2
4	1 1/4	BALL	300	4-213GF	3/8	1-5/8	5/8
		DELTRIN	300	4-314GF	1/2	1-1/2	5/8
5	1 1/4	BALL	325	5-213GF	3/8	1-5/8	3/4
		DELTRIN	325	5-314GF	1/2	1-1/2	3/4

FEATURES

Flat tread Advantage wheels offer the same outstanding performance characteristics with the added bonus of greater load capacity. They carry heavier loads while maintaining their non-marking and easy rolling abilities. A flat, grey special modulus TPR (Thermoplastic Rubber) tread is permanently bonded to a solid polyolefin wheel core. This unique tread is formulated to resist "chunking" and rejects floor debris. Advantage flat tread models are well suited for institutional uses as well as warehouse, industrial and wet environments.

- ✓ **Standard Color / Finish:** Dark grey tread on light grey wheel core
- ✓ **Tread Hardness:** 65 (± 5) Shore A Scale
- ✓ **Temperature Range:** -40° F to + 180° F

CONDUCTIVE OPTION

Above wheel models optionally available with conductive non-marking grey tread. Consult factory.

WHEELS

Advantage™ TPR HD Round Tread Wheels

Capacity up to 500 lbs. each



6-220GD
(shown in photo)

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
6	2	BALL	450	6-220GDB	3/4	2-3/8	1-3/4
		ROLLER	450	6-220GD	3/4	2-3/8	1-3/4
		DELRIN	450	6-320GD	3/4	2-3/8	1-3/4
8	2	BALL	500	8-220GDB	3/4	2-3/8	2-1/2
		ROLLER	500	8-220GD	3/4	2-3/8	2-1/2
		DELRIN	500	8-320GD	3/4	2-3/8	2-1/2

FEATURES

For added capacity and maneuverability, Advantage HD round tread wheels offer greater capacity with non-marking floor protection and a resistance to harsh environments and frequent wash cycles. The unique Advantage crowned tread composition offers lower coefficient of friction for effortless starts and swiveling ease.

Each Jarvis Advantage wheel features a special grey modulus TPR (Thermoplastic Rubber) tread permanently bonded to a rugged polyolefin wheel core. This combination of materials equals a cushion ride over rough or uneven floors.

- ✓ **Standard Color / Finish:** Dark grey tread on light grey wheel core
- ✓ **Tread Hardness:** 65 (± 5) Shore A Scale
- ✓ **Temperature Range:** -40° F to + 180° F

CONDUCTIVE OPTION

Above wheel models optionally available with conductive non-marking grey tread. Consult factory.

Advantage™ TPR HD Flat Tread Wheels

Capacity up to 675 lbs. each



6-220GF
(shown in photo)

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
4	2	ROLLER	350	4-220GF	3/4	2-3/8	1-3/8
		DELRIN	350	4-320GF	3/4	2-3/8	1-3/8
5	1 1/2	ROLLER	350	5-215GF	3/4	2	1-3/8
		DELRIN	350	5-315GF	3/4	2	1-3/8
	2	ROLLER	375	5-220GF	3/4	2-3/8	1-1/2
		DELRIN	375	5-320GF	3/4	2-3/8	1-1/2
6	1 1/2	ROLLER	375	6-215GF	3/4	2	1-5/8
		DELRIN	375	6-315GF	3/4	2	1-5/8
	2	ROLLER	600	6-220GF	3/4	2-3/8	1-3/4
		DELRIN	600	6-320GF	3/4	2-3/8	1-3/4
8	1 1/2	ROLLER	500	8-215GF	3/4	2	2-1/4
		BALL	500	8-215GFB	3/4	2-1/4	2-1/4
		DELRIN	500	8-315GF	3/4	2	2-1/4
	2	ROLLER	675	8-220GF	3/4	2-3/8	2-1/2
		DELRIN	675	8-320GF	3/4	2-3/8	2-1/2

FEATURES

Advantage HD flat tread wheels protect your cargo from shock loading and harsh impacts. Like all Jarvis Advantage wheels, these flat tread models feature a special grey modulus TPR (Thermoplastic Rubber) tread permanently bonded to a solid polyolefin wheel core. They feature a specially blended tread compound that rejects floor debris and metal shavings while providing rolling and swiveling ease. Each Advantage wheel

is designed to withstand harsh environments such as water, oil and grease, solvents, chemicals and harsh cleaning compounds.

- ✓ **Standard Color / Finish:** Dark grey tread on light grey wheel core
- ✓ **Tread Hardness:** 65 (± 5) Shore A Scale
- ✓ **Temperature Range:** -40° F to + 180° F

CONDUCTIVE OPTION

Above wheel models optionally available with conductive non-marking grey tread. Consult factory.



Solid Elastomer Wheels

Capacity up to 1,250 lbs. each



6-760
(shown in photo)

FEATURES

Solid Elastomer wheels are the best choice for moving heavy loads with ease. They are the ergonomic solution to many heavy duty applications and outperform any conventional caster wheel on the market.

Solid Elastomer wheels are recommended for tow-line applications and are popular in automotive environments. They also offer a superior resistance to chipping, flat spotting, cracking and most chemicals, acids and water.

- ✓ **Standard Color / Finish:** Grey
- ✓ **Tread Hardness:** 80 (± 5) Shore D Scale
- ✓ **Temperature Range:** -40° F to + 230°

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
3	1 3/8	Precision Ball	300	3-750	1/2	1-9/16	1/2
		Precision Ball	300	3-755	3/8	1-9/16	1/2
4	1 3/8	Precision Ball	500	4-755	3/8	1-9/16	3/4
	2	Delrin Roller	1,250	4-761	3/4	2-3/8	1-1/2
		Precision Ball	1,250	4-760	3/4	2-3/8	1-1/2
5	1 3/8	Flanged Ball	700	5-750	1/2	1-9/16	1
		Precision Ball	700	5-755	3/8	1-9/16	1
	2	Delrin Roller	1,250	5-761	3/4	2-3/8	2
6	2	Delrin Roller	1,250	6-761	3/4	2-3/8	2-1/4
		Precision Ball	1,250	6-760	3/4	2-3/8	2-1/4
	Precision Ball	1,250	6-770	1/2	2-7/16	2-1/4	
8	2	Delrin Roller	1,250	8-761	3/4	2-3/8	3-1/2
		Precision Ball	1,250	8-760	3/4	2-3/8	3-1/2
	Precision Ball	1,250	8-770	1/2	2-7/16	3-1/2	

TPR / Polyolefin

Capacity up to 125 lbs. each



5-201G
(shown in photo)

FEATURES

Cushion thermoplastic rubber (TPR) tread bonded to a light-weight yet extremely durable polyolefin wheel core. An economical wheel designed for moving light loads with non-marking floor protection. Ideally suited for point-of-purchase displays, audio-visual carts, janitorial equipment and light assembly stands. Plain bearing is standard.

- ✓ **Standard Color / Finish:** Grey tread on black polyolefin wheel core.
- ✓ **Tread Hardness:** 75 (± 5) Shore A Scale
- ✓ **Temperature Range:** -40° F to + 180°

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
3	15/16	Plain	125	3-201G	5/16	1-1/4	5/16
4	15/16	Plain	125	4-201G	5/16	1-1/4	9/16
5	15/16	Plain	125	5-201G	5/16	1-1/4	1

WHEELS

Moldon Rubber Aluminum Core Wheels

Capacity up to 500 lbs. each



6-620
(shown in photo)

FEATURES

Moldon Rubber wheels feature a cushion rubber tread permanently vulcanized to a die-cast aluminum wheel core. These wheels are a good choice when a light weight wheel is needed with good load capacity and shock absorbing capability. They offer maximum floor protection and quiet operation on a variety of floor surfaces.

- ✓ **Standard Color / Finish:** Black tread on die-cast aluminum wheel core
- ✓ **Tread Hardness:** 75 (± 5)
Shore A Scale
- ✓ **Temperature Range:** -40° F to + 160° F

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Bore Less Bearing (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
4	1 1/2	BALL	200	4-615B	1/2, 5/8, 3/4	1-3/8	1-3/4	1-3/8
	2	ROLLER	300	4-620	3/4	1-3/16	2-3/8	1-1/2
5	1 1/2	BALL	250	5-615B	1/2, 5/8, 3/4	1-3/8	1-3/4	1-3/4
	2	BALL	350	5-620B	1/2, 5/8, 3/4	1-3/8	2-1/4	2
		ROLLER	350	5-620	3/4	1-5/8	2-3/8	2
6	1 1/2	BALL	300	6-615B	1/2, 5/8, 3/4	1-3/8	1-3/4	2-1/2
	2	BALL	410	6-620B	1/2, 5/8, 3/4	1-3/8	2-1/4	2-1/2
		ROLLER	410	6-620	3/4	1-5/8	2-3/8	2-1/2
8	1 5/8	BALL	450	8-615B2	1/2, 5/8, 3/4	1-3/8	2	3
		BALL	450	8-615B	1/2, 5/8, 3/4	1-3/8	2-1/4	3
		BALL	450	8-615B0	1/2, 5/8, 3/4	1-3/8	1-3/4 OFFSET	3
	2	BALL	500	8-620B	1/2, 5/8, 3/4	1-3/8	2-1/4	3-1/2
		ROLLER	500	8-620	3/4	1-3/16	2-3/8	3-1/2
10	1 5/8	BALL	500	10-615B0	1/2, 5/8, 3/4	1-3/8	1-5/8 OFFSET	7



Moldon Polyurethane Aluminum Core Wheels

Capacity up to 1,200 lbs. each



6-720
(shown in photo)

FEATURES

Moldon Polyurethane wheels feature a blue polyurethane tread permanently vulcanized to a die-cast aluminum wheel core. Polyurethane typically outlasts rubber treads five-to-one while resisting most oils, acids and other chemicals.

Their aluminum wheel core allows for a light weight wheel without loss of load capacity. They provide maximum floor protection while under heavy loads and will not take a compression set (flat spot) when left standing for long periods of time.

- ✓ **Standard Color / Finish:** Blue tread on die-cast aluminum wheel core
- ✓ **Tread Hardness:** 55 (± 5) Shore D Scale
- ✓ **Temperature Range:** -40° F to + 160° F

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Bore Less Bearing (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
4	1 1/2	BALL	425	4-715B	1/2, 5/8, 3/4	1-3/8	1-3/4	1-1/2
	2	ROLLER	600	4-720	3/4	1-3/16	2-3/8	2-3/8
5	1 1/2	BALL	600	5-715B	1/2, 5/8, 3/4	1-3/8	1-3/4	1-3/4
		ROLLER	600	5-715	5/8	1-3/16	1-5/8	1-3/4
	2	ROLLER	900	5-720	3/4	1-3/16	2-3/8	2-3/8
		BALL	900	5-720B	1/2, 5/8, 3/4	1-3/8	2-3/16	2-3/8
6	1 1/2	BALL	800	6-715B	1/2, 5/8, 3/4	1-3/8	1-3/4	2
		ROLLER	1,000	6-720B	1/2, 5/8, 3/4	1-3/8	2-1/4	2-5/8
	2	ROLLER	1,000	6-720	3/4	1-3/16	2-3/8	2-5/8
		DELRIN	1,000	6-721	3/4	1-3/16	2-3/8	2-5/8
8	1 5/8	BALL	900	8-715B	1/2, 5/8, 3/4	1-3/8	2-1/4	3
		BALL	1,200	8-720B	1/2, 5/8, 3/4	1-3/8	2-1/4	4-1/4
	2	ROLLER	1,200	8-720	3/4	1-3/16	2-5/8	4-1/4
		DELRIN	1,200	8-721	3/4	1-3/16	2-5/8	4-1/4

WHEELS

Moldon Rubber Cast Iron Core Wheels

Capacity up to 500 lbs. each



6-620CI
(shown in photo)

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Bore Less Bearing (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
4	2	ROLLER	400	4-620CI	3/4	1-3/16	2-3/8	4-1/2
5	2	ROLLER	400	5-620CI	3/4	1-3/16	2-3/8	5
6	2	ROLLER	450	6-620CI	3/4	1-3/16	2-3/8	2-1/2
8	2	ROLLER	500	8-620CI	3/4	1-3/16	2-3/8	8-1/2

FEATURES

For heavy duty industrial applications, Moldon Rubber wheels are an all-purpose industry standard. They are recommended for heavy loads where high strength and maximum shock absorption are important. These models are an economical choice for tough, abusive conditions. Special bore and

keyway sizes are available. Please consult factory.

- ✓ **Standard Color / Finish:** Black rubber on black spoke wheel core
- ✓ **Tread Hardness:** 75 (± 5) Shore A Scale
- ✓ **Temperature Range:** -40° F to + 160° F

Moldon Polyurethane Cast Iron Core Wheels

Capacity up to 1,500 lbs. each



6-720CI
(shown in photo)

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Bore Less Bearing (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
4	2	ROLLER	700	4-720CI	3/4	1-3/16	2-3/8	4-1/2
5	2	ROLLER	1,050	5-720CI	3/4	1-3/16	2-3/8	5
6	2	ROLLER	1,200	6-720CI	3/4	1-3/16	2-3/8	5-3/4
8	2	ROLLER	1,500	8-720CI	3/4	1-3/16	2-3/8	8-1/2

FEATURES

Moldon polyurethane tread wheels offer the high load capacity of steel wheels combined with added floor protection and shock absorbing capability. These wheels are designed for heavy duty service under punishing shock load and side thrust applications.

Like rubber tread wheels, they protect floors and are quiet in operation. They provide maximum floor protection while under

heavy loads and will not take a compression set (flat spot) when left standing for long periods of time. Special bore and keyway sizes are available. Please consult factory.

- ✓ **Standard Color / Finish:** Blue polyurethane on silver wheel core
- ✓ **Tread Hardness:** 55 (± 5) Shore D Scale
- ✓ **Temperature Range:** -30° F to + 180° F



High Modulus Rubber Wheels

Capacity up to 550 lbs. each



6-600
(shown in photo)



NEW

8-600G
(shown in photo)

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
-------------------------	----------------------	---------	-------------------	--------------	-----------------------	---------------------	-----------------------------

Black Rubber

6	2 1/8	Ball	350	6-600	5/8	2-1/4	3
8	2 1/4	Ball	450	8-600	5/8	2-1/4	4-1/2
10	2 1/4	Ball	550	10-600	5/8	2-1/4	6
		Ball	550	10-600HD	1	2-1/2	7

Grey Rubber

6	2 1/8	Ball	350	6-600G	5/8	2-1/4	3
8	2 1/4	Ball	450	8-600G	5/8	2-1/4	4-1/2
10	2 1/4	Ball	550	10-600G	5/8	2-1/4	6

FEATURES

High Modulus Donut wheels offer extreme resiliency and mobility. These attractive soft tread wheels deliver a quiet, cushion ride even on rough or uneven floor surfaces. The crowned "donut" tread design offers swiveling ease and

rollability with minimum friction. Special blended modulus rubber compound is permanently bonded to a solid aluminum core which results in a strong but light weight wheel.

- ✓ **Standard Color / Finish:** black or grey rubber on aluminum wheel core
- ✓ **Tread Hardness:** 65 (± 5) Shore A Scale
- ✓ **Temperature Range:** -40° F to + 160° F

Full-Pneumatic Wheels

Capacity up to 470 lbs. each



8-940
(shown in photo)

NEW



8-940G
(shown in photo)

NEW



8-940BLKBRASS
(shown in photo)

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Inflation Pressure (PSI)
-------------------------	----------------------	---------	-------------------	--------------	-----------------------	---------------------	--------------------------

Black Tread / Zinc Hub

8	2.80 / 4	Ball	310	8-940	1/2	3	50
10	4.10 / 4	Ball	470	10-940	1/2	4	50

Grey Tread / Zinc Hub

8	2.80 / 4	Ball	310	8-940G	1/2	3	50
---	----------	------	-----	--------	-----	---	----

Black Tread / Polished Brass

8	2.80 / 4	Ball	310	8-940BLKBRASS	1/2	3	50
---	----------	------	-----	---------------	-----	---	----

FEATURES

Pneumatic wheels are similar to automotive tires and provide the ultimate in cushion ride and shock absorption. They are well suited for moving fragile loads quietly over a variety of floor surfaces, both inside and out. Pneumatic tires have inner tubes and require air inflation.

Jarvis pneumatic wheels are premium quality and are designed to eliminate lops and wobble while rolling.

- ✓ **Standard Color / Finish:** black rubber tire on steel wheel discs
- ✓ **Temperature Range:** -20° F to + 160° F

WHEELS



Polyolefin Wheels

Capacity up to 900 lbs. each



5-513
(shown in photo)

FEATURES

Polyolefin wheels are a lightweight, economical, hard tread wheel that withstands hard impacts and abusive conditions. These injection molded thermoplastic models are well suited to a wide variety of institutional and industrial applications.

Despite their light weight, their impact strength is superior to hard rubber wheels. Polyolefin wheels are impervious to water, oils, grease, solvents, acids and many chemicals.

- ✓ **Standard Color / Finish:** black
- ✓ **Tread Hardness:** 65 (± 5) Shore D Scale
- ✓ **Temperature Range:** -20° F to + 180° F

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
2	13/16	PLAIN	100	2-501	1/4	7/8	1/8
2 1/2	13/16	PLAIN	100	2-1/2-501	1/4	7/8	3/16
	1 1/8	PLAIN	180	2-1/2-511	5/16	1-1/4	1/4
	1 1/4	PLAIN	200	2-1/2-513	1/2	1-1/2	3/8
	1 3/8	BALL	350	2-1/2-522	1/2	1-1/2	1/2
	1 13/16	PLAIN ROLLER	400 400	2-1/2-531 2-1/2-532	5/8 3/4	1-15/16 1-15/16	5/8 5/8
3	13/16	PLAIN	150	3-501	1/4	7/8	1/8
	1 1/8	PLAIN	200	3-511	5/16	1-1/4	1/4
	1 1/4	PLAIN	250	3-521	1/2	1-1/2	1/2
	1 13/16	PLAIN ROLLER	500 500	3-531 3-532	5/8 3/4	1-15/16 1-15/16	5/8 5/8
3 1/2	1 1/4	PLAIN	250	3-1/2 - 513	1/2	1-1/2	7/8
4	1	PLAIN	150	4-511	5/16	1-1/4	1/2
	1 1/4	PLAIN	275	4-513	1/2	1-1/2	1
	1 1/2	PLAIN	375	4-521	3/4	1-5/8	3/4
		ROLLER	375	4-522	3/4	1-5/8	3/4
	2	PLAIN ROLLER	500 500	4-531 4-532	3/4 3/4	2-3/16 2-3/8	3/4 3/4
5	1	PLAIN	150	5-511	5/16	1-1/4	5/8
	1 1/4	PLAIN	300	5-513	3/8	1-1/2	1
		BALL	300	5-514	3/8	1-1/2	1
	1 1/2	PLAIN	450	5-521	3/4	1-5/8	1
		ROLLER	450	5-522	3/4	1-5/8	1
	2	PLAIN ROLLER	650 650	5-531 5-532	3/4 3/4	2-3/16 2-3/8	1-1/8 1-1/8
6	1 3/8	PLAIN	450	6-521	1/2	1-1/2	3/4
	1 1/2	DELTRIN ROLLER	500 500	6-523 6-522	3/4 3/4	2 1-7/8	1 1
		2	PLAIN ROLLER	700 700	6-531 6-532	3/4 3/4	2-3/16 2-3/8
	8	1 1/2	ROLLER	600	8-522	3/4	2
2		PLAIN ROLLER	900 900	8-531 8-532	3/4 3/4	2-3/16 2-3/8	1-1/2 1-1/2

Hi-Temp Resin Wheels

Capacity up to 600 lbs. each



5-521 NHT
(shown in photo)

NEW

FEATURES

Exclusive blended resin compound is designed to withstand the extreme high-temperatures required by certain industries and applications. These easy rolling wheels will not absorb moisture and offer high load ratings and long service life. In addition, they are resistant to most solvents, salts,

alkalines, cooking oils, cleaning chemicals, steam cleaning and water immersion.

They are ideally suited for high temperature applications such as bakeries, food processing plants and industrial parts heating operations.

- ✓ **Standard Color / Finish:** Brown (3 1/2" model)
Black (4" and 5" models)
- ✓ **Tread Hardness:** 75 (± 5) Shore D Scale
- ✓ **Temperature Range:**
(Continuous) -20° F to + 475° F
(Intermittent) -20° F to + 575° F

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
3 1/2	1 1/4	PLAIN	600	3-1/2-521 HTN	1/2	1-3/4	1/2
4	1 1/2	PLAIN	375	4-521 HT	1/2	1-5/8	3/4
5	1 1/2	PLAIN	450	5-521 NHT	1/2	1-5/8	1



Phenolic Wheels

Capacity up to 1,400 lbs. each



6-222
(shown in photo)

FEATURES

Phenolic wheels are an industry-standard performer with proven service over many decades. These economical wheels are well suited to a wide variety of industrial and commercial uses. Phenolic wheels are constructed of compression molded phenolic resin filled with macerated canvas.

They are a hard tread wheel with high load capacity and are resistant to most oils and other chemicals. Phenolic wheels roll easier and more quietly than steel or cast iron, providing greater floor protection.

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Bore Less Bearing (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
3	1 1/2	PLAIN ROLLER	600	3-121	1/2	1/2	1-5/8	1/2
	1 13/16	ROLLER	600	3-221	3/4	1-3/16	1-5/8	1/2
		ROLLER	700	3-222	9/16	1-1/8	1-15/16	3/4
3 1/4	2	ROLLER	700	3-1/4-222	3/4	1-3/16	2-3/8	1-1/4
4	1 1/2	PLAIN ROLLER	600	4-121	1/2	1/2	1-5/8	1
	2	ROLLER	600	4-221	3/4	1-3/16	1-5/8	1
		PLAIN ROLLER	800	4-122	3/4	3/4	2-3/16	1-1/2
5	1 1/2	PLAIN ROLLER	600	5-121	1/2	1/2	1-5/8	1-1/2
		ROLLER	600	5-221	3/4	1-3/16	1-5/8	1-1/2
	2	PLAIN ROLLER	1,000	5-122	3/4	3/4	2-3/16	1-3/4
6	1 1/2	PLAIN ROLLER	800	6-121	1/2	1/2	1-5/8	1-1/2
		ROLLER	800	6-221	3/4	1-3/16	1-5/8	1-1/2
	2	PLAIN ROLLER	1,200	6-122	3/4	3/4	2-3/16	2-1/2
8	2	PLAIN ROLLER	1,400	8-122	3/4	3/4	2-3/16	4
		ROLLER	1,400	8-222	3/4	1-3/16	2-3/8	4

- ✓ **Standard Color / Finish:** black
- ✓ **Tread Hardness:** 90 (± 5) Shore D Scale
Rockwell 102E
- ✓ **Temperature Range:** -45° F to + 250° F

Hi-Temp Phenolic

Capacity up to 1,400 lbs. each



8-222HT
(shown in photo)

FEATURES

With a maximum operating temperature range of +525° F (intermittent service), these durable wheels are designed to perform in conditions that will destroy ordinary caster wheels. Their high load capacity enables them to move heavy loads under extreme heat conditions. All Jarvis high-temp Phenolic wheels are equipped with stainless steel roller bearings with stainless steel raceways for maximum service life and rolling ease.

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Bore Less Bearing (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
4	1 1/2	PLAIN	600	4-121HT	1/2	-	1-5/8	1/2
	2	STAINLESS STEEL ROLLER	800	4-222HT	3/4	1-3/16	2-3/8	2
5	1 1/2	PLAIN	600	5-121HT	1/2	-	1-5/8	1/2
	2	STAINLESS STEEL ROLLER	1,000	5-222HT	3/4	1-3/16	2-3/8	2-1/2
6	2	STAINLESS STEEL ROLLER	1,200	6-222HT	3/4	1-3/16	2-3/8	3
8	2	STAINLESS STEEL ROLLER	1,400	8-222HT	3/4	1-3/16	2-3/8	3-1/2

- ✓ **Standard Color / Finish:** brown
- ✓ **Tread Hardness:** 90 (± 5) Shore D Scale
Rockwell 102E
- ✓ **Temperature Range:**
-45° F to + 475° F (Continuous operation)
-45° F to + 525° F (Intermittent service)
Consult factory.

WHEELS

Cast Iron Wheels

Capacity up to 1,500 lbs. each



6-250
(shown in photo)

FEATURES

Cast Iron wheels are recommended for heavy loads or for applications where floor protection and noise reduction are not important. These wheels have exceptionally long wear life and are fully machined for concentricity. Cast iron wheels are ideal for warehousing, manufacturing and general material handling. In addition, they can be used in temperature extremes

- ✓ **Standard Color / Finish:** Silver
- ✓ **Temperature Range:** -45° F to + 250° F

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Bore Less Bearing (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
2	1	PLAIN	150	2-120	1/4		1-1/8	3/4
2 1/2	15/16	PLAIN	200	2-1/2-120	5/16		1-3/8	1
3	1 1/4	PLAIN	250	3-120	1/2		1-1/2	1-1/4
3 1/2	1 1/4	PLAIN	300	3-1/2-120	1/2		1-1/2	1-3/4
4	1 1/4	PLAIN	400	4-120	1/2		1-1/2	2
	1 1/2	PLAIN	550	4-130	5/8		1-15/16	2-1/4
		ROLLER	550	4-230	3/4	1-3/16	1-15/16	2-1/4
	2	ROLLER	750	4-250	3/4	1-3/16	2-3/8	3-1/2
5	1 1/4	PLAIN	500	5-120	1/2		1-1/2	2-12
	1 1/2	ROLLER	650	5-230	3/4	1-3/16	1-15/16	3-1/2
	2	ROLLER	800	5-250	3/4	1-3/16	2-3/8	4-1/2
6	1 1/2	ROLLER	600	6-230	3/4	1-3/16	1-3/4	4
	2	ROLLER	1,200	6-250	3/4	1-3/16	2-3/8	6-1/2
8	2	ROLLER	1,500	8-250	3/4	1-3/16	2-3/8	8-1/2

V-Groove Wheels

Capacity up to 1,000 lbs. each



6-250V
(shown in photo)

FEATURES

V-Groove wheels are designed for use on inverted angle iron tracks to control direction, protect floors and provide ease of movement in production lines or assembly areas. These wheels are machine finished across wheel face and "V" groove.

- ✓ **Standard Color / Finish:** Silver
- ✓ **Temperature Range:** -45° F to + 250° F

Wheel Diameter (Inches)	Tread Width (Inches)	Bearing	Capacity (Pounds)	Model Number	Bearing Bore (Inches)	Bore Less Bearing (Inches)	Hub Length (Inches)	Approximate Weight (Pounds)
4	2	ROLLER	800	4-250V	3/4	1-3/16	2-3/16	4
5	2	ROLLER	800	5-250V	3/4	1-3/16	2-3/16	5
6	2	ROLLER	1,000	6-250V	3/4	1-3/16	2-3/16	8

Brakes



VertiLoc® Brake

A popular side-operated brake that employs cam action to lock brake pad across entire surface of wheel tread. Brake locks wheel only, and the swivel radius of the caster is not affected by this brake design. All steel construction provides positive, reliable braking under a variety of operating conditions and wheel tread types.

To order as factory installed swivel caster option, add "VL" to end of caster model number. To field install brake, see Brake Kit Number chart below.

Caster Wheel Diameter	Brake Kit Number					
	13-28 Series Zinc	135-285 Series Nickel	W13-W28 Series Zinc	30-40 Series Zinc	305-405 Series Nickel	S30-S40 Series Stainless
3"	E 53	E 30	E 63	E 63	E 69	
3-1/2"				E 64	E 62	
4"	E 54	E 31	E68	E 68	E 61	SS E 64
5"	E 55	E 32	E67	E 67	E 77	SS E 65
6"				E 66	E 6	SS E 66

VertiLoc Brake Kit includes brake axle & nut, brake pedal and shoe lever.



Vinyl brake contact available. Consult factory.



VertiLoc HD® Brake

This brake features the same basic design as the VertiLoc brake shown above except that this model is designed for use on heavier duty casters and wheels. It also employs a cam action to lock brake pad across entire surface of wheel tread. Brake locks wheel only, and the swivel radius of the caster is not affected by this brake design. All steel construction provides positive, reliable braking under a variety of operating conditions and wheel tread types.

To order as factory installed swivel caster option, add "VL" to end of caster model number. To field install brake, see Brake Kit Number chart below.

Caster Wheel Dia.	Brake Kit Number				81 Series Stainless Steel Brake Kits		
	130-136 Series Zinc	61 Series Zinc	81 Series Zinc	81KPL Series Zinc	Caster Wheel Dia.	Metal Brake Contact	Vinyl Brake Contact
3"	E 46				4"	SSE 84	SSE 84VY
4"	E 50	E 90	E 84	E 84	5"	SSE 85	SSE 85VY
5"	E 51	E 89	E 85	E 85	6"	SSE 86	SSE 86VY
6"	E 99	E 94	E 86	E 86	8"	SSE 88	SSE 88VY
8"	E 79*	E 95	E 88	E 88			



Vinyl brake contact available. Consult factory.



PosiLoc® Brake

A simple, effective toe-activated wheel brake that provides excellent braking action on a variety of wheel types and tread surfaces. Brake locks wheel only. Thermoplastic black brake pedal offers easy engagement and disengagement of brake. Stainless steel construction.

To order as factory installed swivel caster option, add "PL" to end of caster model number.

Note: Melting point of brake pedal is +421° F.

To field install brake, see Brake Kit Number chart above.

Caster Wheel Diameter	Kit Number	
	W13-W28 Series Zinc	30-40 Series Zinc
3"	3005-27	3005-27
3-1/2"		3005-37
4"	3005-47	3005-47
5"	3005-57	3005-57
6"		3005-67

Brake kit includes brake housing and pedal as one unit. Existing caster axle & nut will work with this design.



Taupe and red brake pedals optionally available, consult factory.



PosiLoc HD® Brake

A heavy duty version of the PosiLoc brake shown above specially designed for larger casters and heavier loads. A simple, effective toe-activated wheel brake that provides excellent braking action on a variety of wheel types and tread surfaces. Brake locks wheel only. Thermoplastic black brake pedal offers easy engagement and disengagement of brake.

To order as factory installed swivel caster option, add "PL" to end of caster model number.

Note: Melting point of brake pedal is +421° F

To field install brake, see Brake Kit Number chart above.

Caster Wheel Dia.	Brake Kit Number	
	81 Series Zinc	81SB Series Zinc
4"	TI 481 PLB	TI 481 PLB
5"	TI 581 PLB	TI 581 PLB
6"	TI 681 PLB	TI 681 PLB
8"	TI 881 PLB	TI 881 PLB

Brake kit includes brake housing and pedal as one unit. Existing caster axle & nut will fit this design.

Brakes



SideLock Brake

Cam activated brake exerts pressure on side of wheel hub for solid braking power. Large wing-shaped foot pedal is easily accessed, and brake can be locked from either end of the pedal for operator ease. A proven industrial brake design that locks wheel only.

To order as factory installed swivel caster option,

Caster Wheel Dia.	Kit. No.
	81 Series Zinc
4"	000 E81 HD
5"	000 E81 HD
6"	000 E81 HD
8"	000 E81 HD


add "SLB" to end of caster model number.

To field install brake, see kit numbers above.



Hex Head Brake

Threaded bolt activates pressure directly to the side of the wheel when turned by wrench. Locking action is positive and secure for those applications where equipment must remain stationary for long periods of time. This style brake is commonly used on Jarvis low profile Business Machine casters. To order add "HHBRK" to end of caster model.



Thumb Screw Brake

Threaded bolt activates pressure directly to the side of the wheel when turned by thumb pressure. Locking action is positive and secure for those applications where equipment must remain stationary for long periods of time. This style brake is commonly used on Jarvis low profile Business Machine casters. To order add "TSBRK" to end of caster model.

Swivel Locks



Swivel Lock (Welded)

Available on: 30 Series top plate casters (zinc, nickel plated & stainless steel)

1-Position swivel lock that is factory installed only. Hand operated plunger locks caster swivel in trailing position at 180° while wheel spins freely. Spring-loaded plunger mechanism is welded to top plate and features a clip that automatically locks in top of fork base when activated.

To order as factory installed swivel caster option, add "1PSL" to end of caster model number.



Swivel Lock (Welded)

Available on: Jarvis 81 Series casters.

Designed for heavier loads and industrial applications, these 4-position swivel locks are welded to the bottom of the top plate and can convert swivel casters into rigid casters.

The spring loaded plunger is hand operated and fits into notches cut in 90° intervals in the swivel raceway. Plunger locks out of way when not in use for free swiveling action. Factory installed only.

To order as factory installed swivel lock, add "SL4" to end of caster model number.



Swivel Lock (Bolt-On)

Available on: 71, 81 and S81 Series casters

4-Position, bolt-on swivel lock is installed as the caster is mounted on the equipment. A spring-loaded, hand-operated plunger is engaged to fit into slots on the swivel raceway at 90° intervals while wheel spins freely.

To disengage, simply pull out on the plunger pull ring and twist and lock so that it will not contact the swivel raceway.


The caster fork base must be equipped with notches for this swivel lock to function.

To order, specify swivel lock part number "3091-22". For stainless steel swivel lock order part number "3091-17".





Accessories / Parts

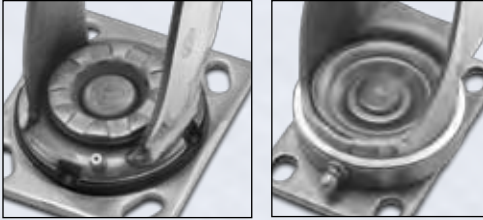

Swivel Grease Seals

Swivel seals are designed to keep dirt and moisture out of the swivel raceway and lubricant in for easier swiveling and longer caster life.

They are recommended for equipment exposed to frequent washings or sterilization cycles in hospitals, food processing plants and bakeries. They offer a high resistance to grease, oils, chemicals and detergents.

Swivel Grease Seals are available on:
Series 30 – 40, 61, 71, 81, 130-136 Series Casters.

To order as factory installed swivel caster option, add "GS" to end of caster model number.



Floor Locks

Floor locks are designed to lock mobile equipment in a desired location. Often used on platform trucks, laundry carts and postal equipment, this unique locking system locks equipment in place with a simple press of the foot. Another press of the foot releases the lock for complete mobility.

Floor locks are recommended for use on level surfaces and are not recommended for inclined surfaces. Non-slip rubber brake pad on bottom of floor lock holds securely on a variety of floor surfaces.

Jarvis floor locks feature a 4" x 4-1/2" top plate with slotted mounting holes for 2-5/8" x 3-5/8" or 3" x 3". Mounting bolt size: 3/8".

To order, specify Model Number from chart below:

Wheel Diameter (Inches)	Caster Series	Overall Extended Height	Retracted Height	Model Number
4"	61, 81	5-3/4"	4-3/4"	FL4
5"	61, 81	6-5/8"	5-5/8"	FL5
6"	61, 81	7-5/8"	6-5/8"	FL6
8"	61, 81	9-5/8"	8-5/8"	FL8

Axles

All Jarvis Axles are Grade 2.

Series	Description	Specifications	Part Number
13 - 28 SERIES	PLAIN AXLE	5/16" DIAMETER X 1-7/16" LONG	902-02
	BRAKE AXLE	5/16" DIAMETER X 1-11/16" LONG	957-02
30 - 40 SERIES / SWIVELS	PLAIN AXLE	3/8" DIAMETER X 2-1/8" LONG	927-02
	ZERK AXLE	3/8" DIAMETER X 2-1/8" LONG	928-12
	PLAIN BRAKE AXLE	3/8" DIAMETER X 2-1/4" LONG	964-02
	ZERK BRAKE AXLE	3/8" DIAMETER X 2-1/4" LONG	965-12
31 SERIES / RIGIDS	PLAIN AXLE	3/8" DIAMETER X 2-1/4" LONG	932-22
	ZERK AXLE	3/8" DIAMETER X 2-1/4" LONG	932-12
130 SERIES (3", 4", 5" WHEEL DIA.)	PLAIN AXLE	3/8" DIAMETER X 2-5/8" LONG	966-02
	ZERK AXLE	3/8" DIAMETER X 2-5/8" LONG	966-12
	PLAIN BRAKE AXLE	3/8" DIAMETER X 2-7/8" LONG	961-02
	ZERK BRAKE AXLE	3/8" DIAMETER X 2-7/8" LONG	961-12
130 SERIES (6" & 8" WHEEL DIA.)	PLAIN AXLE	1/2" DIAMETER X 2-3/4" LONG	942-22
	ZERK AXLE	1/2" DIAMETER X 2-3/4" LONG	942-12
	PLAIN BRAKE AXLE	1/2" DIAMETER X 3" LONG	982-42
	ZERK BRAKE AXLE	1/2" DIAMETER X 3" LONG	982-52
61-62 SERIES	PLAIN AXLE	1/2" DIAMETER X 2-3/4" LONG	942-22
	ZERK AXLE	1/2" DIAMETER X 2-3/4" LONG	942-12
	PLAIN BRAKE AXLE	1/2" DIAMETER X 3" LONG	982-42
	ZERK BRAKE AXLE	1/2" DIAMETER X 3" LONG	982-52
81-82 SERIES	PLAIN AXLE	1/2" DIAMETER X 3-3/8" LONG	941-22
81SB SERIES	ZERK AXLE	1/2" DIAMETER X 3-3/8" LONG	941-12
W81, W82, W87, W88, PNEUMATIC CASTERS	PLAIN AXLE	1/2" DIAMETER X 4" LONG	980-22
	ZERK AXLE	1/2" DIAMETER X 4" LONG	980-22
S30 - 40 SERIES	ZERK AXLE	3/8" DIAMETER X 2.170 LONG	928-37
	BRAKE ZERK AXLE	3/8" DIAMETER X 2.22 LONG	940-17
S81 - 82 SERIES	ZERK AXLE	1/2" DIAMETER X 3-3/8" LONG	941-17

Spanner Bushings

Series	Specifications	Part Number
13 - 28 SERIES	3/8" OD X 5/16" ID X 1.300" LONG	4405-01
S30 - S40 SERIES (STAINLESS STEEL)	1/2" OD X 3/8" ID X 1.600" LONG	4425-17
	1/2" OD X 3/8" ID X 1.687" LONG	4428-17
W13-W28 SERIES 30-40 SERIES	1/2" OD X 3/8" ID X 1.600" LONG	4425-17
	1/2" OD X 3/8" ID X 1.575" LONG	4426-12
	1/2" OD X 3/8" ID X 1.600" LONG	4434-01
	1/2" OD X 3/8" ID X 1.610" LONG	4425-02
	1/2" OD X 3/8" ID X 1.687" LONG	4428-01
	9/16" OD X 3/8" ID X 2" LONG	4478-01
130-136 SERIES	5/8" OD X 3/8" ID X 2.031" LONG	4433-11
	3/4" OD X 3/8" ID X 2" LONG	4487-01
	3/4" OD X 3/8" ID X 2" LONG	4465-01
	9/16" OD X 3/8" ID X 2" LONG (3" WHEEL DIAMETER ONLY)	4478-01
61- 62 SERIES	3/4" OD X 3/8" ID X 2" LONG	4465-01
	3/4" OD X 1/2" ID X 2.031" LONG	4441-01
	3/4" OD X 1/2" ID X 2.120" LONG	4423-01
	3/4" OD X 1/2" ID X 2.260" LONG	4494-17
S81 - 82 SERIES (STAINLESS STEEL)	3/4" OD X 1/2" ID X 2.437" LONG	4498-17
	5/8" OD X 1/2" ID X 2.437" LONG	4448-17
	5/8" OD X 1/2" ID X 2.280" LONG	4467-01
81 - 82 SERIES	5/8" OD X 1/2" ID X 2.437" LONG	4431-01
	3/4" OD X 1/2" ID X 2.260" LONG	4460-01
	3/4" OD X 1/2" ID X 2.437" LONG	4458-01

ACCESSORIES / PARTS



Thread Guards

Thread guards are designed to protect wheel bearings from thread and other floor debris that can bind wheels thereby creating flat spots. They provide longer caster life and less maintenance of wheels. They are available as an option on many Jarvis models. See thread guard chart below for specific thread guard – wheel availability.



Plastic thread guard
1140-20
(shown in photo)

Wheel Model	Wheel Description	Wheel Size: Diameter x Tread Width	Thread Guard Part Number & Inside Diameter	Thread Guard Finish/ Material
2-1/2-105	Cushion Tread / Solid Rubber	2-1/2" x 1-1/4"	1132-02 (3/8" ID)	Zinc
3-105		3" x 1-1/4"	1132-02 (3/8" ID)	Zinc
4-105		4" x 1-1/4"	1132-02 (3/8" ID)	Zinc
5-452		5" x 1-1/8"	1164-06 (3/8" ID)	Nickel
5-452		5" x 1-1/8"	1164-BR (3/8" ID)	Brass
5-152		5" x 1-1/4"	1148-12 (3/8" ID)	Zinc
6-105		6" x 9/32"	1162-02 (3/8" ID)	Zinc
6-105		6" x 9/32"	1160-02 (3/8" ID)	Zinc
3-103	Cushion Tread / Solid Rubber	3" x 15/16"	1121-16 (5/16" ID)	Nickel
4-103		4" x 15/16"	1121-16 (5/16" ID)	Nickel
4-452		4" x 1-1/8"	1163-06 (3/8" ID)	Nickel
5-103		5" x 15/16"	1121-16 (5/16" ID)	Nickel
5-109		5" x 1-5/8"	1148-02 (7/16" ID)	Zinc
5-105		5" x 1-1/4"	1135-35 (3/8" ID)	Copper Nickel
5-105		5" x 1-1/4"	1135-06 (3/8" ID)	Nickel
5-105		5" x 1-1/4"	1135-02 (3/8" ID)	Zinc
5-110	Hard Tread / Solid Rubber	5" x 1-5/8"	1148-02 (7/16" ID)	Zinc
3-1/2-513	Polyolefin	3-1/2" x 1-1/4"	1170-02 (3/8" ID)	Zinc
4-513		4" x 1-1/4"	1170-02 (3/8" ID)	Zinc
5-513		5" x 1-1/4"	1170-02 (3/8" ID)	Zinc
5-532		5" x 2"	1135-12 (1/2" ID)	Zinc
3-1/2-13G	PolyLoc / Grey / Round Tread	3-1/2" x 1-1/4"	1143-02 (3/8" ID)	Zinc
4-213G *		4" x 1-1/4"	1148-12 (3/8" ID)	Zinc
4-314G		4" x 1-1/4"	1148-12 (3/8" ID)	Zinc
5-213G *	PolyLoc / Grey / Round Tread	5" x 1-1/4"	1139-20 (3/8" ID)	Spacer Combo /Plastic Grey
5-213G *		5" x 1-1/4"	1141-50 (5/16" ID)	Spacer Combo /Plastic Red
5-213G *		5" x 1-1/4"	1140-PC (3/8" ID)	Black Powder Coat
5-215G	PolyLoc / Grey / Flat Tread	5" x 1-1/2"	1135-06 (3/8" ID)	Nickel
5-215G		5" x 1-1/2"	1135-02 (3/8" ID)	Zinc
6-215G		6" x 1-1/2"	1153-17 (1/2" ID)	Stainless Steel
6-220G		6" x 2"	1153-17 (1/2" ID)	Stainless Steel
6-215G		6" x 1-1/2"	1153-02 (1/2" ID)	Zinc
6-220G		6" x 2"	1153-02 (1/2" ID)	Zinc
6-220G		6" x 2"	1153-00 (1/2" ID)	Plastic
6-320G		6" x 2"	1153-00 (1/2" ID)	Plastic
4-213P *	PolyLoc / Blue / Round Tread	4" x 1-1/4"	1148-12 (3/8" ID)	Zinc
5-213P *		5" x 1-1/4"	1139-20 (3/8" ID)	Spacer Combo /Plastic Grey
5-213P *		5" x 1-1/4"	1141-50 (5/16" ID)	Spacer Combo /Plastic Red
5-213P *		5" x 1-1/4"	1140-PC (3/8" ID)	Black Powder Coat

(Continues next column)

Wheel Model	Wheel Description	Wheel Size: Diameter x Tread Width	Thread Guard Part Number & Inside Diameter	Thread Guard Finish/ Material	
5-215P	PolyLoc / Blue / Flat Tread	5" x 1-1/2"	1135-06 (3/8" ID)	Nickel	
5-215P		5" x 1-1/2"	1135-02 (3/8" ID)	Zinc	
6-215P		6" x 1-1/2"	1153-17 (1/2" ID)	Stainless Steel	
6-220P		6" x 2"	1153-17 (1/2" ID)	Stainless Steel	
6-215P		6" x 1-1/2"	1153-02 (1/2" ID)	Zinc	
6-220P		6" x 2"	1153-02 (1/2" ID)	Zinc	
6-220P		6" x 2"	1153-00 (1/2" ID)	Black Plastic	
5-213GD *		Advantage / Round Tread	5" x 1-1/4"	1140-20 (3/8" ID)	Plastic / Grey
5-213GD *	5" x 1-1/4"		1140-02 (3/8" ID)	Zinc	
5-213GD *	5" x 1-1/4"		1140-06 (3/8" ID)	Nickel	
5-314GD	5" x 1-1/4"		1140-20 (3/8" ID)	Plastic / Grey	
6-213GD *	6" x 1-1/4"		1160-02 (3/8" ID)	Zinc	
6-314GD	6" x 1-1/4"		1160-02 (3/8" ID)	Zinc	
6-220GD	Advantage / Flat Tread	6" x 2"	1153-00 (1/2" ID)	Black Plastic	
5-213GF		5" x 1-1/4"	1140-20 (3/8" ID)	Plastic / Grey	
5-213GF		5" x 1-1/4"	1140-06 (3/8" ID)	Nickel	
5-314GF		5" x 1-1/4"	1140-20 (3/8" ID)	Plastic / Grey	
6-220GF		6" x 2"	1153-00 (1/2" ID)	Black Plastic	
6-320GF		6" x 2"	1153-00 (1/2" ID)	Black Plastic	
4-121	Phenolic	4" x 1-1/2"	1148-12 (3/8" ID)	Zinc	
4-221		4" x 1-1/2"	1148-12 (3/8" ID)	Zinc	
5-122		5" x 2"	1135-12 (1/2" ID)	Zinc	
6-222		6" x 2"	1153-17 (1/2" ID)	Stainless Steel	
6-222		6" x 2"	1153-02 (1/2" ID)	Zinc	
6-222		6" x 2"	1153-BL (1/2" ID)	Black Powder Coat	
4-755		Solid Elastomer	4" x 1-3/8"	1148-32 (3/8" ID)	Yellow Chromate
4-760			4" x 2"	1148-22 (1/2" ID)	Zinc
5-770	5" x 2"		1153-E7 (1/2" ID)	Electro Polished	
4-120	Cast Iron	4" x 1-1/4"	1135-02 (3/8" ID)	Zinc	
5-113	Welded Disc / Rubber Tread	5" x 1-1/4"	1141-19 (3/8" ID)	Black Polane	
5-113		5" x 1-1/4"	1141-15 (3/8" ID)	Grey Polane	
5-113		5" x 1-1/4"	1141-06 (3/8" ID)	Nickel	
6-113		6" x 1-1/4"	1157-19 (3/8" ID)	Black Polane	
6-113		6" x 1-1/4"	1157-15 (3/8" ID)	Grey Polane	

* All 213 model wheels come standard with plastic thread guards covering the hub area. The thread guard shown in the chart above mount over this small thread guard.



Bumpers




4714-00
(Grey)



4714-01
(Black)



B-3-1/2 R
(Round Stem)



B-3-1/2 S
(Square Stem)



End Bumper B-1

Grey or black end bumper generally used on the ends of tubular handles on carts and platform trucks. Designed to help protect equipment as well as walls and door facings. Bumper Dimensions: 3-1/4" diameter with steel insert for 5/16" mounting bolt.


Tubing Bumper B-3-1/2

Designed to fit over 1" OD round or square tubing on carts and a variety of rolling equipment. Please specify round or square tubing when ordering. Specify **B-3-1/2 R** for round ID and **B-3-1/2 S** for square ID.


Rolling Bumper B-5

5" diameter rolling bumper; tapered grey rubber bonded to zinc plated insert with removable center bushings to fit stem diameters from 3/8" to 1-1/8". Specify bumper **B-5**.

4718-00
(Grey)



4719-00
(Black)



4720-01
(Grey)



4721-01
(Black)



4722-01
(Grey)



4724-01
(Black)



Corner Bumper B-8

Grey or black corner bumper for mounting on the corners of equipment, carts or any flat surfaces. Absorbs shock to protect equipment and walls, doors and furniture. Bumper Dimensions: 7/8" thick x 1" high x 2-5/8" long from inside corner on each side.

Corner Bumper B-10

A heavy duty bumper with reinforced, rounded corner to protect equipment from shocks and bumps. Steel inserts inside bumper assures permanent mounting to equipment. Ends are tapered and rounded for added design appeal. Bumper Dimensions: 1" thick x 1-1/16" high x 3-1/16" long from inside corner on each side. Mounting holes are 13/64" diameter.

Corner Bumper B-12

A common bumper used to protect a wide variety of mobile equipment and the surrounding environment from bumps and scrapes. This bumper is equipped with steel inserts and can be mounted on any flat surface. The ends of the bumper legs may be cut at notched area to make square ends. Bumper features steel inserts. Bumper Dimensions: 7/8" thick x 1" high x 3-1/8" long from inside corner on each side. **Grey bumper with no steel insert, order model number 4724-30.**

Tubing Adapters

Plastic adapters accepts 7/16" diameter spring ring stem. Metal adapter accepts 7/16" diameter straight stem.



Rubber Expanding Adapters

for Series 27, W27, 40, S40 and 60MG casters



Tubing OD (Inches)	Plastic Round	Plastic Square	Metal
3/4-16 ga.	1085	1086	-
7/8-16 ga.	1087	1088	-
1-16 ga.	1089	1090	1070
1-18 ga.	1084	1091	1071
1-1/2-18 ga.	-	1082	-

Adapter Number	ID of Round or Square Tube (Inches)	Tube Size Range (Inches)	Adapter Kit Parts			
			Rubber Bushing	Top Knurled Nut	Plastic Bushing	Base Washer
9	3/4	0.720-0.851	1644-00	1421-02	1429-02	1709-02
11*	7/8	0.852-0.927	1645-00	1435-02	1432-02	1709-02
13	1	0.928-1.029	1646-00	1435-02	1432-02	1709-02
15	1-1/8	1.030-1.140	1647-00	1436-02	1431-02	1709-02
17B	1-3/16	1.178-1.303	1651-00	1441-02	1430-02	1709-02
19C*	1-3/8	1.360-1.425	1648-00	1438-02	1433-02	1709-02
19A	1-1/2	1.426-1.589	1649-00	1437-02	1434-02	1709-02
21	1-7/8	1.790-1.850	1650-00	1422-02	1440-02	1473-02

















*Stainless Steel knurled nut and base washer.












Stem Dimensions

STEM OPTIONS


Threaded Stems

Drawing	Caster Series	Stem Size
	L4 (Stem 1)	5/16" dia. - 18 x 3/4" long
	L4 (Stem 2)	3/8" dia. - 16 x 1" long
	L4 (Stem 3) 13 (Stem 1) W13 (Stem 1)	3/8" dia. - 16 x 1-1/2" long
	Bus. Mach. Single Wheel 13 (Stem 4) W13 (Stem 4)	1/2" - 13 x 1-1/2" long
	13 (Stem 2) W13 (Stem 2)	7/16 dia. - 14 x 1-1/2" long
	13 (Stem 5) W13 (Stem 5)	1/2" dia. - 13 x 2-3/4" long
	36 (Stem 1) 56MG (Stem 1) 56HN (Stem 1) 136 (Stem 1)	1/2" dia. - 13 x 3/4" long
	13 (Stem 3) W13 (Stem 3) 36 (Stem 2) 56 (Stem 1)	1/2" dia. - 13 x 1" long
	36 (Stem 2) 56MG (Stem 2) 56HN (Stem 3) 136 (Stem 2)	1/2" dia. - 13 x 1" long
	36 (Stem 3) 56 (Stem 3) 56MG (Stem 3) 56HN (Stem 3) 136 (Stem 3) S36 (Stem 3)	1/2" dia. - 13 x 1-1/2" long
	36 (Stem 4) 56MG (Stem 4) 136 (Stem 4)	1/2" dia. - 20 x 3/4" long
	36 (Stem 5) 56MG (Stem 5) 56HN (Stem 5) 136 (Stem 5)	1/2" dia. - 20 x 2-1/4" long
	36 (Stem 6) 56MG (Stem 6) 56HN (Stem 6) 136 (Stem 6)	5/8" dia. - 11 x 1-1/4" long
	36 (Stem 7) 56MG (Stem 7) 56HN (Stem 7) 136 (Stem 7)	5/8" dia. - 18 x 1-3/4" long
	36 (Stem 8) 56MG (Stem 8) 56HN (Stem 8) 136 (Stem 8)	3/4" dia. - 10 x 1" long
	56 (Stem 3)	3/4" dia. - 10 x 1-3/4" long


Spring Ring Stems

Drawing	Caster Series	Stem Size
	L3 Bus. Mach. Dual / Single Wheel 14 (Stem 1) W14 (Stem 1)	7/16" dia. x 1-3/8" long
	Business Machine Single Wide Wheel	7/8" dia. x 2-3/16"
	14 (Stem 2) W14 (Stem 2)	7/16" dia. x 1-15/16" long
	34 (Stem 1) 134 (Stem 1)	3/4" dia. x 2-3/16" long
	34 (Stem 2) 134 (Stem 2)	13/16" dia. x 2-3/16" long
	34 (Stem 3) 54MG (Stem 1) 54HN (Stem 1) 134 (Stem 3)	.845" dia. x 2-3/16" long
	34 (Stem 4) 54MG (Stem 2) 54HN (Stem 2) 134 (Stem 4) S34 (Stem 4)	.865" dia. x 2-3/16" long
	34 (Stem 5) 134 (Stem 5)	1" dia. x 2-3/16" long
	34 134 (Stem 6) 54 MG (Stem 3) 54 HN (Stem 3)	.860" Square x 2-3/16" long




Octagon Stem

	19 W19 32	3/4" dia. by 2" long
---	-----------------	----------------------





Ladder Stem

	L5	5/16" dia. - 18 x 4-3/4" long with 5/8" thread length at top of stem; bottom stem flange is 9/16" dia. x 1-13/16" long
---	----	--

Pipe Thread Stem

	17 (Stem 2) 38 (Stem 2)	3/4" Pipe Thread (1" actual stem dia.)
	38 (Stem 3)	1" Pipe Thread (1-1/4" actual stem dia.)
	38 (Stem 4)	1-1/4" dia. (1-1/2" actual stem dia.)








Round Stem

	L2	For metal sockets 7/16" dia. x 1-29/32" long
	54MG (Stem 1)	.845" dia. round x 2-3/16"
	54MG (Stem 2)	.865" dia. round x 2-3/16"
	54 (Stem 3)	1" dia. round x 2-3/16"



Top Plate Dimensions







Drawings are 40% scale reduction.

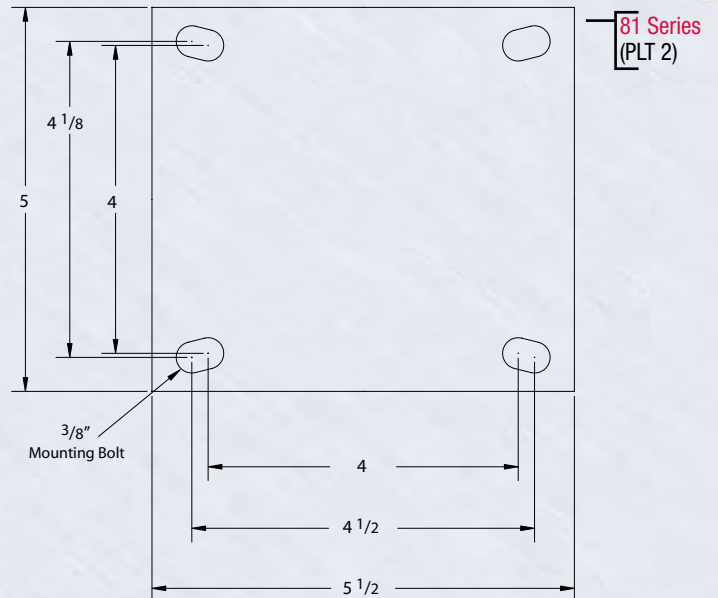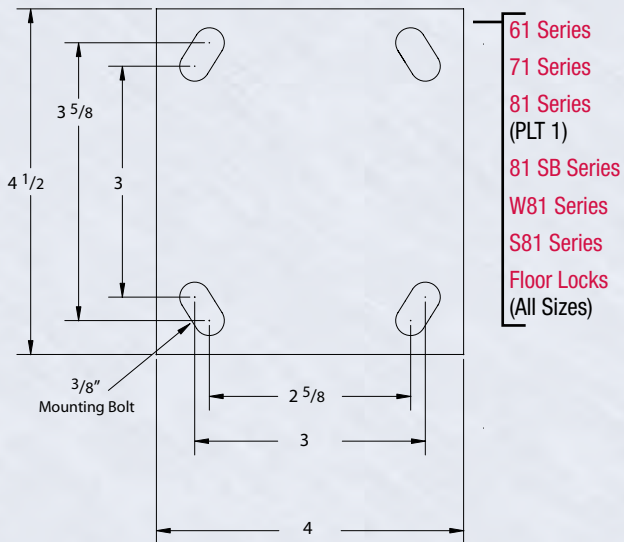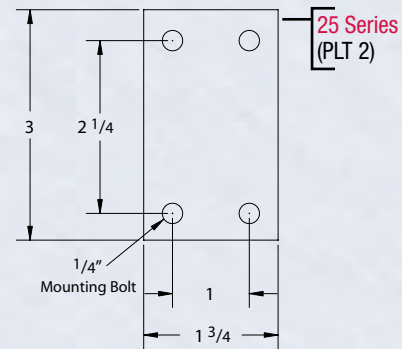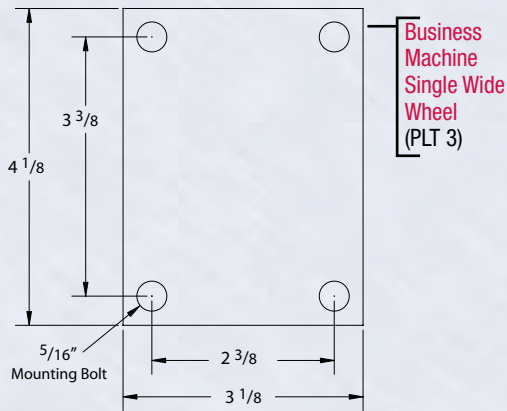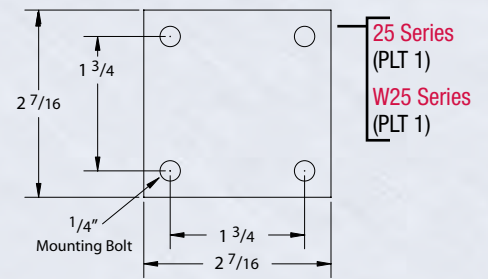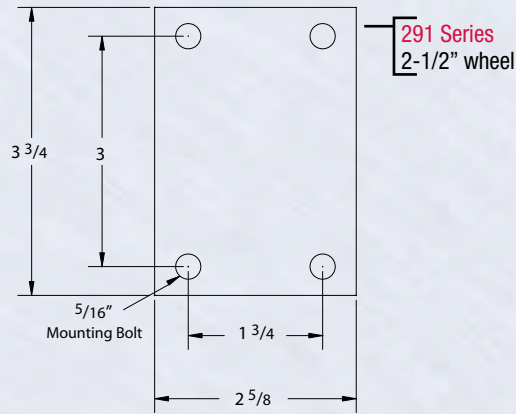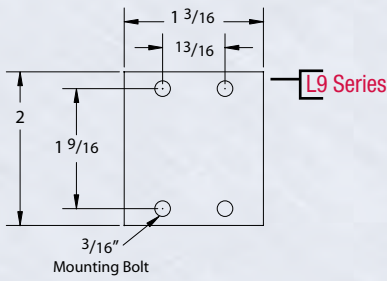

TOP PLATE OPTIONS

Top Plate Dimensions

Drawings are 40% scale reduction.


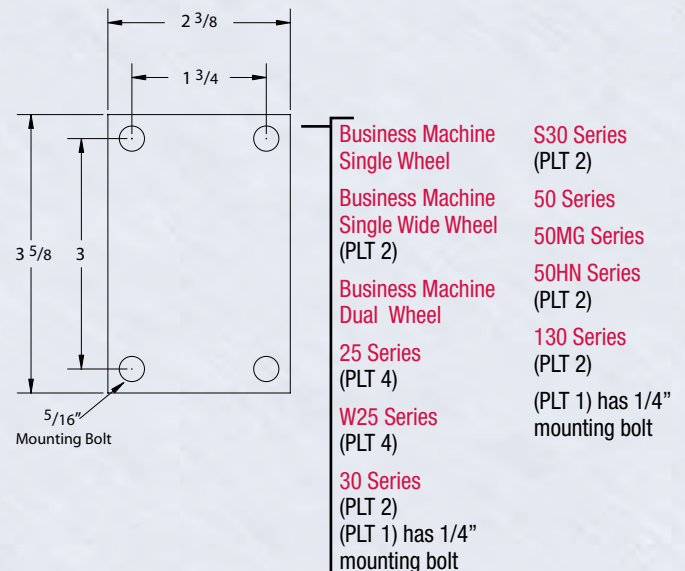
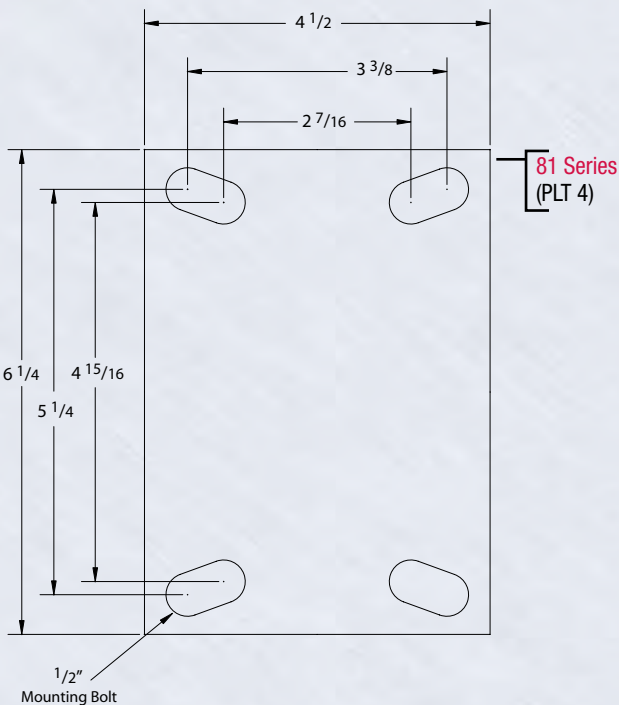
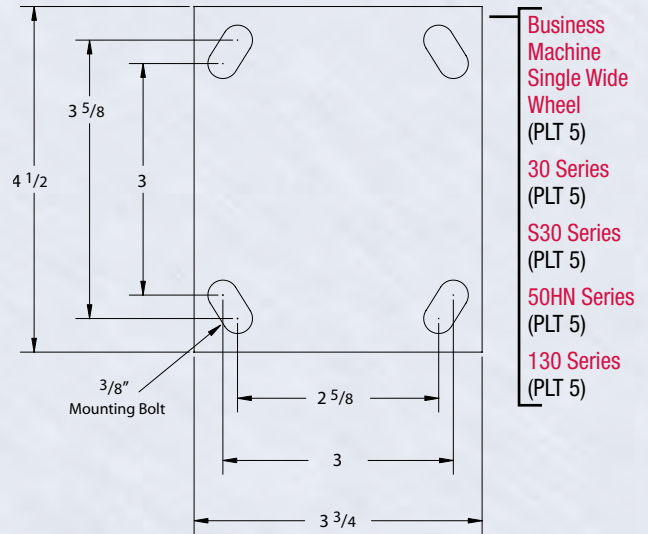
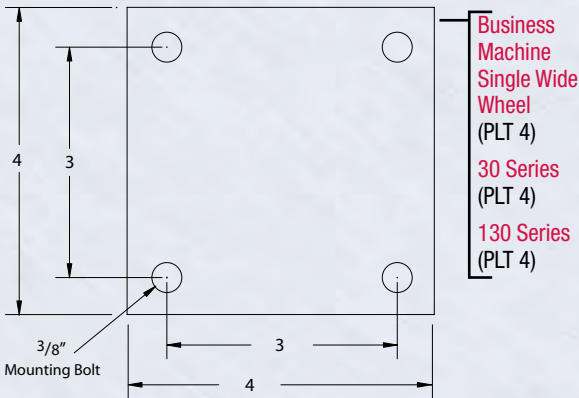
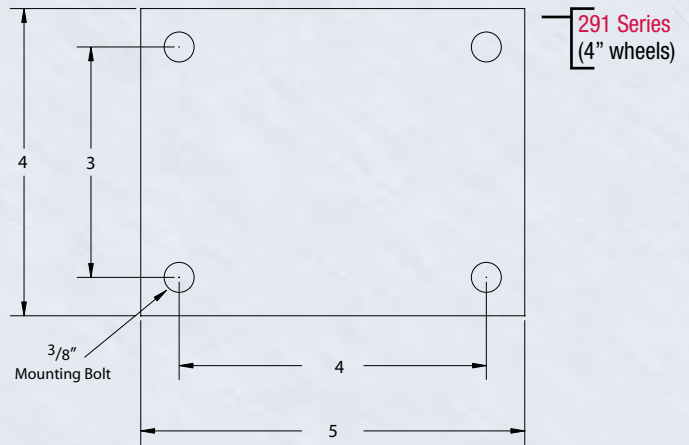
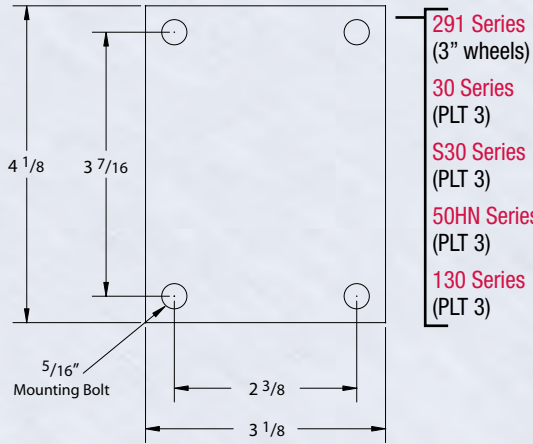


TOP PLATE OPTIONS



Top Plate Dimensions

Drawings are 40% scale reduction.

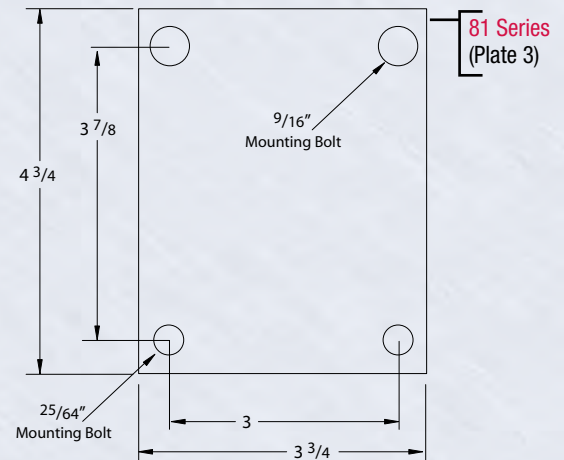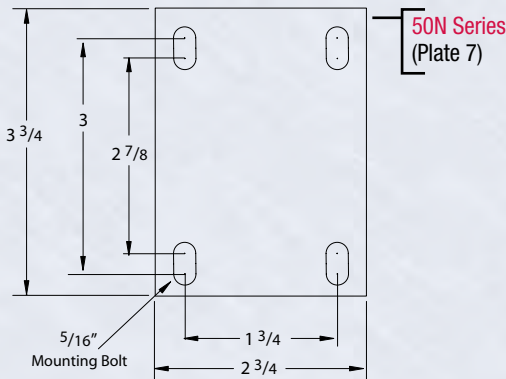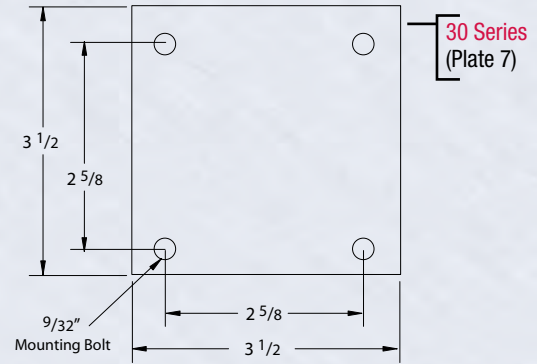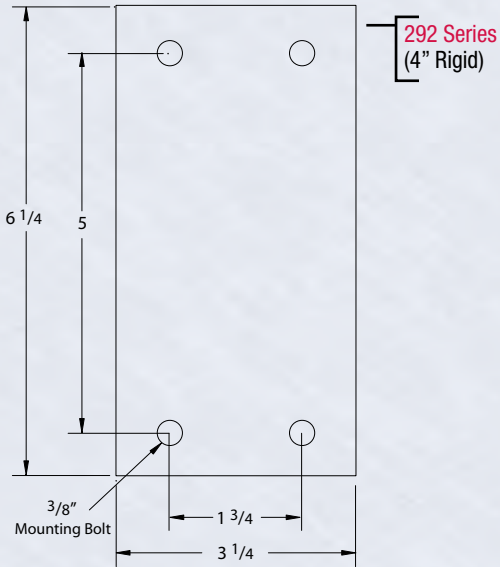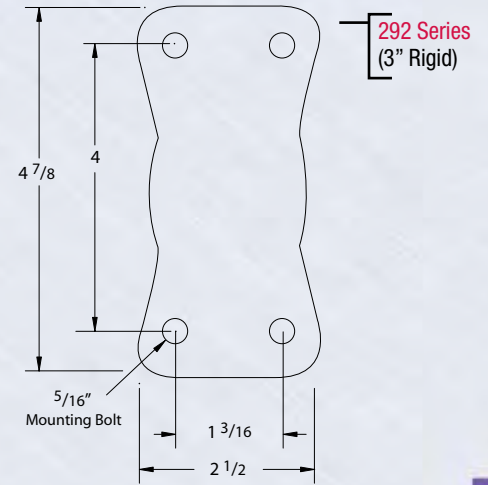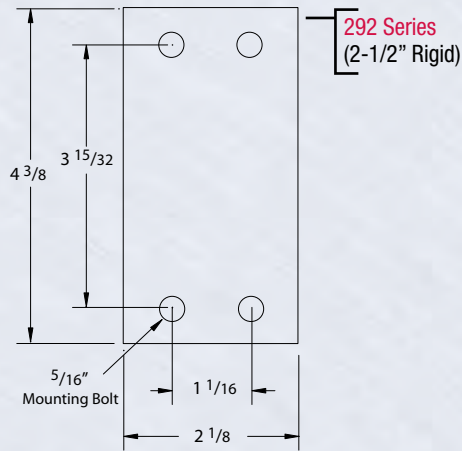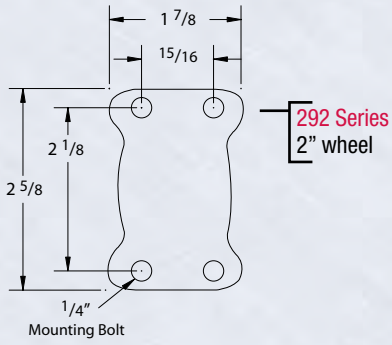

TOP PLATE OPTIONS



Jarvis Caster Company

881 Lower Brownsville Road • Jackson, TN 38301 • Phone: 800-995-9876 • Fax: 800-259-7188
info@jarviscaster.com • www.jarviscaster.com