12 — Liberator Convertible Hand — **Trucks**

600 lb. Capacity Hand Truck **1200 lb.** Capacity Platform Truck

Choose one of these popular models or build your own from components on page 13



"Senior"

Model A13-B81-C6-D5

- •Loop Handle with Comfort Sleeve
- •Heavy-Duty Frame with 5 Crossmembers
- •18" x 9" Solid Extruded Aluminum Nose Plate
- •High Quality 10" x 3.5" 4 Ply Pneumatic Tires with **Precision Bearings**
- Crossbar with Comfort Sleeve





Model B70-C6-D5

- •Double Grip Swing Arm •Heavy-Duty Frame with 4 Crossmembers
- •18" x 9" Solid Extruded Aluminum Nose Plate
- •High Quality 10" x 3.5" 4 Ply Pneumatic Tires with Precision Bearings



Guaranteed to be the best convertible you've ever used or send it back

Liberator Convertible Features:

- •Thicker and stronger frame with heavy duty side channel reinforcements.
- •Crossbars are four-sided tube with two sides ribbed for added strength.
- •Crossbars are attached with individual aircraft-grade rivets at each corner providing better frame integrity.
- •Heavy duty high tensile steel axle will not bow under maximum loads.
- Balloon cushion caster wheels provide better rollability (wing brake standard on one wheel).
- •Our components can be used to upgrade other leading brands of hand trucks.

Two year warranty!!



- •One piece solid release bar
- •Simple design with minimal moving parts for maximum reliability
- •Smoothest release action in the industry



<u>SPECIFICATIONS</u>	<u>SR</u>	<u>JR</u>
Overall width	20"	20"
Frame width	12"	12"
Overall length (platform mode)	56"	43"
Height as hand truck	61.5"	52"
Height as platform truck	46"	41"
Platform bed length	51.5"	38.25"
Platform height from floor	11"	11"
Balloon cushion swivel casters	5"x1.25"	5"x1.25"



A Handles — B Frames

For Senior Models Only



Standard Loop



Standard Loop w/ Comfort Sleeve



A26 Double Grip w/ U Brace



B70Jr. Double Grip



Jr. Double Grip 2 Crossbars



Standard



High Capacity

C Noses



C1, C19
14" x 7.5"
Recessed Heel
C1 w/ Cutouts
C19 w/o Cutouts



CA1
14" x 7.5"
Cast, Recessed Heel
w/ Cutouts
500 lb. Capacity



14" x 10.5" Recessed Heel w/ Cutouts Extruded Aluminum



CA3
14" x 12"
Cast, Recessed Heel
w/ Cutouts
500 lb. Capacity



C2, C20
18" x 7.5"
Recessed Heel
C2 w/ cutouts
C20 w/o cutouts
Extruded Aluminum



18" x 7.5"
Cast, Recessed heel
w/ cutouts
500 lb. Capacity



C15
18" x 10.5"
Recessed Heel
w/ Cutouts
Extruded Aluminum



C16, C12
14" x 7.5"
Front Mount
Extruded Aluminum
C16- w/o Cutouts
C12- w/ Cutouts



C4 14" x 9" Front Mount Extruded Aluminum



16" x 12" Front Mount Extruded Aluminum



C17, C13

18" x 7.5"
Front Mount
Extruded Aluminum
C17- w/o Cutouts
C13- w/ Cutouts



C6, C26
18" x 9"
Front Mount
Extruded Aluminum
C6- w/o Cutouts



C14 18" x 12" Front Mount struded Aluminun



C10 20" x 9" Front Mount Extruded Aluminum



C9
20" x 12"
Front Mount
Extruded Aluminum



(C28 & C29 standard as rear mount, can be front mounted upon request)

C28, C29 C28 18" x 9" C29 14" x 9" Rear Mount

-E Accessories —





Removable Snap-On or Permanent

E23L SR Snap On E25L SR Permanent

E22L JR Snap On E24L JR Permanent

E49 SR 18" Wide Permanent Deck

D Wheels



D10 10" x 2 1/8" Balloon Cushion Polyolefin Hub 600 lb. Capacity



10" x 3"
Carefree
Solid Foam
600 lb. Capacity



10" x 3.5" 4 Ply Pneumatic 2 pc. Steel Hub 600 lb. Capacity



D2 10" x 2.5" Semi-pneumatic 1 pc. Plastic Hub 500 lb Capacity



Folding Nose Extensions

Tubular E5F, E5R 36" **E6F, E6R** 30" Full Channel Extruded E2F, E2R 20" E3F, E3R 30"

F-for use with Front Mount Nose Plates **R**-for use with Recessed Heel and Rear Mount Nose Plates



E32 Fixed Wings (Senior Only)

14 — General Purpose Hand Trucks —

S-SERIES DIRECT REPLACEMENT HAND TRUCKS

500 lb Capacity - Two Year Warranty



S-500

- Loop handle
- •Straight frame with standard crossmembers
- •14" x 7.5" cast noseplate, recessed heel with cutouts
- •8" balloon cushion wheels with precision bearings



S-502

- Loop handle
- •Straight frame with standard crossmembers
- •14" x 7.5" cast noseplate, recessed heel with cutouts
- •10" balloon cushion wheels with precision bearings



S-503

- •Double grip handle
- •Straight frame with standard crossmembers
- •18" x 7.5" extruded aluminum, solid front mount noseplate
- •10" x 3.5" 4 ply pneumatic wheels with precision bearings

500 lb. Capacity Hand Truck 1,000 lb. Capacity Platform Truck **Two Year Warranty**



SJR

- Convertible Junior
- •18" x 7.5" extruded aluminum, solid front mount noseplate
- •10" x 3.5" 4 ply pneumatic wheels with precision bearings



SSR

- Convertible Senior
- •18" x 7.5" extruded aluminum, solid front mount noseplate
- •10" x 3.5" 4 ply pneumatic wheels with precision bearings

Direct Replacement Series Components

HANDLES

A1 Single Loop A11 Double Grip

FRAMES

Straight Back, No Logo

Crossmember

Junior Frame, Double Grip

No Logo Crossmember

Senior Frame, Standard

No Logo Crossmember

CA1 14" x 7.5" Cast, Recessed Heel 18" x 7.5" Extruded Aluminum C17

WHEELS

10" x 3.5" Pneumatic, 4 Ply, D5

Precision Bearings

D10 10" Balloon Cushion, Poly Core

D11 8" Balloon Cushion, Poly Core

Add Optional Stairclimbers



Extruded Aluminum



ElC Cast Aluminum



Narrow Aisle Hand Trucks



A12-B10-CA1-D12-NA
-NA Indicates Narrow Aisle



14" Wide and 18 lbs!

- •Specially designed brackets move each wheel in 1.5" only 14" wide with D11 wheels
- •Fits all standard Liberator hand trucks, including curved back frames, front mount noses, cast noses, C28 & C29 rear mount steel noses, and all handles.
- •Fits all 8" & 10" wheels, including short axle wheels (see below).
- •Parts are interchangeable with most competitors.
- •Optional stairclimbers are engineered from steel for long life (also available in extruded aluminum)
- •Coke OFS compatible!
- •Ideal for beverage distributors, provisions companies, liquor distributors- anyone delivering in tight areas.



C23 Coke OFS Compatible



-E40 Steel Stairclimber for Narrow Aisle Hand Truck



-E44 Extruded Aluminum Stairclimber for Narrow Aisle Hand Truck

Part Description (NA Indicates Narrow Aisle Component)	Part #
LH Wheel Bracket NA RH Wheel Bracket NA Long Axle, Narrow Aisle Short Axle, Narrow Aisle Stairclimber (Pair), Narrow Aisle Steel Stairclimber, Extruded Aluminum, Narrow Aisle Completion Pack, Long Axle NA Completion Pack, Short Axle NA	7507-001 7507-002 2002-272 2002-273 2002-E40 2002-E44 2002-333 2002-334



Developed for the Snack Food Delivery Professional



- •Reduce your number of trips
- •Lightweight aluminum construction reduce fatigue
- •Modular design allows perfect fit for individual drivers
- •Extra long skids allow truck to slide easily out of the delivery vehicle
- •Optional Folding nose for bulky packages (44" shown)
- Two Year Warranty



Tubular Folding Nose Extension

36" **E5F/E5R** 44" **E4F/E4R**

F for use with Front Mount Nose

R for use with Rear Mount or Recessed Nose

110 lb. Capacity

Shown with optional 51" skids







A8-B8-CA1-D11-E19-E4R (Height with A8 Handle As Shown 75 1/2")

If adding skids order -E19 for use with 8" wheels

- -E20 for use with 10" wheels

Most popular models and handle styles are shown here, but our modular design allows your choice of any B&P handles, noseplates or wheels



10" x 2 1/8" **Balloon Cushion** Polyolefin Hub 600 lb Capacity



8" x 2 1/8" Balloon Cushion Polyolefin Hub 600 lb. Capacity



10" x 3.5" 4 Ply Pneumatic 2 pc. Steel Hub 600 lb. Capacity



Carefree 10" x 3" No Flat Solid Foam 600 lb. Capacity



Carefree 8" x 3" No Flat Solid Foam 600 lb. Capacity



8" x 2" High Performance Dark Gray Non-Marking 600 lb. Capacity



8" x 2.5" Pneumatic 2 pc. Steel Hub 500 lb. Capacity



— Snack Truck —



SPECIFICATIONS

Overall Height 73" Width (at nose plate CA1) 14" Bed Length 66" Handle Height 38" Folding Nose Length 36" Folding Nose Height 46" Weight (w/D11) 35 lb Capacity (folding nose) 80 lb Capacity (4 wheel) 200 lb

•Lightweight, high capacity design

•66" bed length allows you to carry large boxes of chips, pretzels, etc.

•36" folding nose keeps boxes in place, yet folds up for transportation and storage

•Latches keep both the handle and folding nose in the upright position Standard with 14" x 7 1/2" cast noseplate (CA1) and 8" balloon cushion wheels (D11)

•5" x 1 1/4" swivel stem casters provide a smooth ride and long life

Nosep	late	$\mathbf{O}_{\mathbf{I}}$	ptions
-------	------	---------------------------	--------

14" x 7 1/2" Cast/Recessed Heel Nose Standard	CAI
18" x 7 1/2" Cast/Recessed Heel	CA2
14" x 12" Cast/Recessed Heel	CA3
14" x 7 1/2" Extruded Aluminum/Recessed Heel	C1
18" x 7 1/2" Extruded Aluminum/Recessed Heel	C2

Wheel Options

8" Balloon Cushion Standard D11 8" Aluminum Core Mold on Rubber D12 8" Pneumatic D9



APRON HAND TRUCK DOCKBOARDS

- •A lightweight solution for dock to truck/truck to truck applications
- •Features our exclusive punched design providing excellent traction while preventing buildup of mud, slush, ice or debris
- •Curbs provide an increased margin of safety

Steel bolt-on legs



Model #	Size W x L	Capacity	Leg Length	Max Height Diff	Weight
AHTD-3036	30"x 36"	800 lbs	7"	5"	27 lbs
AHTD-3048	30" x 48"	800 lbs	9"	7"	35 lbs



4th Wheel Attachment =

- •4th wheel attachment takes the load off the operator
- •Latch keeps the 4th wheel up and out of the way when not in use
- •Lightweight design weighs only 8 lbs!
- •600 lb capacity
- •Attaches to Liberator and S-Series Trucks
- •Optional latch system locks the 4th wheel to prevent accidental closing (2002-E37L)
- •Smooth rolling TPR casters


(Not compatible with stair climbers or convertible trucks.)





Optional wings provide additional support for large boxes.(2002-E30)





Latch and pin system keeps the 4th wheel extended (2002-E37L)

— "Three Way" Liberator Hand Truck— 19

Engineered for Bottled Water, Ice and Other Delivery Professionals





Truck Locks Securely in Any of the Three Positions for Safety

- •Standard with 18" x 7.5" cast noseplate and 10" pneumatic tires with precision bearings
- •Integral 27" folding nose for large loads stores out of the way when not in use

Other noseplates and wheels available Consult factory for details

Specifications

Height in 2 wheel position	52"
Height in 4 wheel position	42"
Deck Area	51" x 12"
Deck Height	11"
Capacity in 2 wheel position	600 lb.
Capacity in 4 wheel position	900 lb.
Weight (as shown)	48 lb.





New Design!

IC-1

- **Riveted construction for durability**
- 8" balloon cushion wheel (D11) standard
- 18" slatted nose standard
- Aircraft grade cables support nose
- Engineered housing supports axle and allows use of stairclimbers





Wheel Options

D11 8" balloon cushion standard 8" tpr, dark gray non-marking D1

D9 8" pneumatic

8" mold-on rubber, aluminum core D12

Noseplate Options

18" slatted nose standard

18" solid nose 18S 24SL 24" slatted nose

24S 24" solid

Shown with optional stairclimbers Model # IC-1-E1L

Bakery Cart



- •Solid back and large noseplate to handle bulky baked goods, trays and boxes
- •Skids allow cart to slide easily up and down truck beds and loading ramps

20" Width 52" Height

Noseplate (C10) 20"W x 9"D

Wheel Options

D5 shown 10" Pneumatic 10" Balloon Cushion D10 8" Balloon Cushion D11

Shown with D5 wheels and optional Frame Extension (E15) and E18 skids for 10" wheels B9-C10-D5-E15-E18 (Note: Use E14 skids with 8" wheels, E18 skids with 10" wheels)



— Aluminum Curb Ramps —

Totally New Curb Ramp Design Makes All Other Curb Ramps OBSOLETE!

Part #	Capacity	W" x L"	Weight
CRP2618	750 lb	26 x 18	8 lb
CRP2727	750 lb	27 x 27	13 lb
CRP2736	750 lb	27 x 36	17.5 lb
CRP3030	750 lb	30 x 30	15 lb
CRP2745	500 lb	27 x 45	22 lb



- •Our exclusive process punches holes in the material, then raises the edges of the cutouts for superior traction
- •Exceptionally lightweight
- •Won't collect ice, mud, snow, or debris
- •Handle slot doubles as a stop



- •Wedge design curb ramp features the same punched design for traction
- •Sides folded down keep the ramp in place and allows more usable width
- •600 lb. capacity in a curb ramp weighing only 6 lb (22x24)

Part #	Capacity	W" x L"	Weight
CRW2224	600 lb	22 x 24	6 lb
CRW2724	750 lb	27 x 24	12 lb

WALKBOARDS

- •Lightweight, one piece design is resistant to bending and fatigue
- •Ideal for spanning between truck and loading dock
- •Punched design won't collect ice, mud, snow, or debris

Part #	Capacity	W" x L"	Weight
LWB2448	750 lb	24 x 48	39 lb



Formed profile provides strength without adding weight

Bolt on hooks secure walkboard to truck bed



Heavy Duty Food Service Trucks

- •Automotive style, dual disc brakes provide the ultimate in driver control and safety
- •Total stopping power for the heaviest loads
- •Braking is not affected by rain, snow, mud, or slush
- •New cable actuated design is virtually maintenance free and provides equal stopping power to both wheels for consistent braking action with no pulling left or right
- •Available with pneumatic tires, foam tires, and our slime treated pneumatic tires for the ultimate in flatfree performance

Available in most handle styles

Order trucks complete, or kits are available to install on Liberator hand trucks.









E29 Pull Bar Gets the hand truck out from under loads and makes it easier to lift into trailer

E13 Kick Bar Make easy work of kicking loads back



A8-B1-C6-D5-E1L-E13-E29-E31-BDC



A43-B2-C6-D5-E1L-E13-BDC



A6-B1-C6-D5-E1L-E13-BDC


See complete list of components to build your own hand truck on page 7-10



Double Disc Brake Kits ———

Add Our Double Disc Brake Kit to Liberator Hand Trucks

- •Our kits have everything you need to upgrade your Liberator hand truck to the ultimate brake truck - Kits include handles where necessary, all levers, cables, hardware, and a detailed installation guide
- •Choose your kit below based on your specific handle and wheel combinatioin
- •New lever/cable system eliminates T-rods and provides excellent leverage in an ergonomic design
- Double disc design provides load control while allowing wheels to turn independently





Fits A1, A2, A13 and A14 (Handle sold separately)

D5 Tire 2005-BDCA1D5 **D5S** Tire 2005-BDCA1D5S **D6** Tire 2005-BDCA1D6



A3,A4,A5 and A6

(Includes Handle)

D5 Tire 2005-BDCA3D5 **D5S** Tire 2005-BDCA3D5S **D6** Tire 2005-BDCA3D6

D5 Tire 2005-BDCA4D5 **D5S** Tire 2005-BDCA4D5S **D6** Tire 2005-BDCA4D6

D5 Tire 2005-BDCA5D5 **D5S** Tire 2005-BDCA5D5S **D6** Tire 2005-BDCA5D6

D5 Tire 2005-BDCA6D5 **D5S** Tire 2005-BDCA6D5S **D6** Tire 2005-BDCA6D6



Fits A11, A40, A41, A42, A43, A44

(Handle sold separately)

D5 Tire 2005-BDCA11D5 **D5S** Tire 2005-BDCA11D5S **D6** Tire 2005-BDCA11D6

D5 Tire 2005-BDCA21D5

D5S Tire 2005-BDCA21D5S

D6 Tire 2005-BDCA21D6





A7, A8 and A9 (Includes Handle)

D5 Tire 2005-BDCA7D5 **D5S** Tire 2005-BDCA7D5S **D6** Tire 2005-BDCA7D6

D5 Tire 2005-BDCA7D5 **D5S** Tire 2005-BDCA7D5S **D6** Tire 2005-BDCA7D6

D5 Tire 2005-BDCA7D5 **D5S** Tire 2005-BDCA7D5S **D6** Tire 2005-BDCA7D6



Reduce risk of fatigue and injury!

- •600 lb. capacity (with specified wheels)
- •4 sided frame crossmembers for rigidity
- •Attached with 700 pound rated aircraft rivets
- •Exclusive logo channel Provides identity and unsurpassed fatigue resistance
- •Non cracking, high strength extruded aluminum noseplates
- •High tensile steel axle standard
- •Extruded axle brackets for strength and impact resistance
- •Extruded not cast stairclimbers

BACKED BY A TWO YEAR WARRANTY!



"We have sold and serviced brake trucks for years and find that B&P works the best and requires virtually no maintenance"

Pull hand truck out from under load with ease

-Southern Distributor



Brake shoes contact the front of the wheel, not the top or back. This prevents the possibility of locking up due to low tire pressure. Angled raking surface provides more friction on the tire than paddle designs, increasing stopping power.



Our unique lightweight tread brake design applies even pressure to both wheels assuring load control even in wet conditions. New cable design eliminates T rods and provides excellent leverage in an ergonomically correct design. Modular design allows for easy repair of damaged components.







A8-B1-C8-D5-BTC

A1-B1-C8-D5-BTC

We Have Taken Our Proven Tread Brake System and Made it Better!

- •We have engineered a lever and cable system for the handles which provides more leverage than previous systems and offers a more ergonomically correct design.
- •The lower pull bar has been upgraded to eliminate the clevis. The eye bolt goes directly through the pull bar, allowing more adjustment than before.
- •Previous tread brake systems are easily upgraded.





Fits A1, A2, A13 and A14 (Handle sold separately) Part #2005-BTCA1



Fits A11, A40, A41, A42, A43, (Handle sold separately) Part #2005-BTCA11



A3,A4,A5 and A6 (Includes Handle) Part #2005-BTCA3 Part #2005-BTCA4 Part #2005-BTCA5 Part #2005-BTCA6



(Includes Handle) Part #2005-BTCA12 Part #2005-BTCA21

A12 and A21



(Includes handle) Part #2005-BTCA7 Part #2005-BTCA8 Part #2005-BTCA9



— Bulk Delivery System –



- Pre-load by account at the warehouse carry only what you need, reducing fuel costs
- •Eliminate picking on the street Keeps product out of the elements and reduces the risk of injuries associated with bay trucks
- •Average 40 cases per cart vs 10 for a hand truck Reduce the number of trips by up to 400%
- •Straight trucks instead of bay trucks lower initial cost and lower maintenance costs
- •Faster check-in time Reduce account service times by up to 50% increasing customer satisfaction

•Increase Efficiency

- •Reduce Risk of Injuries
- •Lower Maintenance Costs
 - •Better Driver Retention

INCREASED BOTTOM LINE!



TWO YEAR WARRANTY

THE BEST BUILT, BEST BACKED CART!



- •Heavy duty deck with double bracing is a full 1/8" thick
- •Formed, one piece deck won't curl like welded deck designs
- •Monolithic design virtually eliminates deck twisting and failure due to fatigue



- •Fully welded handle pockets Stronger and longer lasting
- •Handles are round, heavy wall aluminum for excellent resistance to bending and breaking
- •Handles stay in place while in use, yet easily removable for loading/unloading

EXCLUSIVE CENTER BRAKE SYSTEM





- •Brake system locks both center wheels for loading/unloading and transportation
- •Actuated from either end or either side
- •No unexpected cart movement

*Free Freight Program does not apply to Bulk Delivery Carts.



—Bulk Delivery Carts——



- •Two handles with 2 crossbars, 1 vertical strap, and buttons for containment curtain (part # each handle 2025-134)
- •8" x 2" Urethane center wheels (part #8057-114)
- •6" x 2" TPR square tread swivel casters (part #8057-038)
- •1200 lbs capacity
- •Weight 90 lbs

TO ORDER WITH BRAKE OPTION ORDER **FHE-1B** Weight 97 lbs




- •18" x 60" deck
- Allows 2 carts to sit side by side on walkie riders or forklifts
- •Steel Understructure
- •Accepts forks up to 10 1/2" wide
- •Requires only 7" between forks
- •1200 lbs capacity
- •Weight 90 lbs

*Walkie Rider Not available with brake


Pictured with

#207 Handles

Standard Understructure



Walkie Rider Understructure

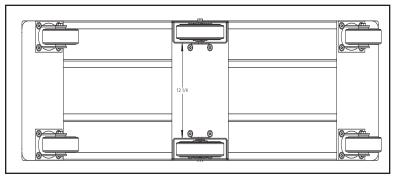


HANDLE OPTIONS/REPLACEMENT HANDLES

2 STANDARD ON ABOVE CARTS (#204 Handle Option)

2 Crossbars/1 Vertical Strap, 3/16" thick Buttons for containment curtain (To order replacements order Part # 2025-134)


(If buttons for containment curtain are not required order part number 2025-103)



ALSO AVAILABLE: (Order #207 Handle Option)

2 Crossbars/1 Vertical Strap, Buttons for containment curtain (To order replacements order Part # 2025-130)

(If buttons for containment curtain are not required order part number 2025-131)





28 — Bulk Delivery Cart Accessories



Part # 2025-505

- •Product Containment Curtain that works!
- •Available in canvas (part # 2025-503) and mesh (part # 2025-505)
- •Eliminate costly and unsightly stretch wrap
- •Keeps load secure
- •Straps don't drag on the ground
- •Steel strap clips won't break




Liberator Keg Hauler Part # KEG-1

•Hauls 6 full half barrels!

Part # 2025-503

- •Lightweight extruded tubular aluminum design.
- •Locking tabs keep KEG-1 in place yet removes easily with integrated handles

Fits 60" and 61" carts (18" width)




Bulk Delivery Cart Storage Rack Part # 2026-001

- •Maximize Warehouse Space Cart rack has a capacity to hold 14 carts and 28 handles
- •Aluminum Construction Makes the cart rack strong and last long
- •Convenient way to store multiple bulk delivery carts in one place with the ability to stack 3 cart racks high

51" Deep, 96" Wide, 68 1/2" High Weight 210 lbs empty Max Height 207" (3 High Requires 20 Ft. Ceiling Minimum)

Part # NCR2745

Curb Ramp for use with Bulk Delivery Cart 1/4" Smooth Plate with Non-Skid Tape 27" Wide x 45" Long 1400 Lb Capacity Weight 34 Lb

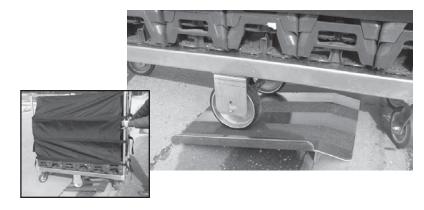

We are the experts in bulk delivery!

Call one of our product experts to design a cart to suit your specific application.



Universal Bulk Delivery ———— 29 **Square Pocket Design**



Square Handle Fits Competitor Models

From Casters to Complete Carts, B & P Manufacturing Offers the Guaranteed Best in Bulk Delivery Systems

FHM-1


18"x60" smooth deck, square pockets 8" rigid urethane center casters (P/N 8057-007) 8" TPR swivel casters (P/N 8057-017)



•Replace casters or upgrade to our exclusive heavy duty understructure.




- •Product containment curtain for 60" carts. Replace torn curtains with our unique design, providing more durable metal clips.
- Available in Mesh (P/N 2025-506) or Solid Canvas (P/N 2025-507)



NEW STRONGER HANDLE

•Replacement handles feature a more ergonomic handle design that reduces driver hand fatigue. (P/N 2025-165)



- •Replacement decks feature our more durable formed design.
- •Square pockets accept competitor handles.

(P/N FHS-1860S)

With Heavy Duty Understructure - FHS-1 With Heavy Duty Understructure and Brake - FHS-1B



Model shown FHE-2460-217-HD10-SH

with square handles and shelf option



- •24" wide x 60" long deck
- •Two handles with two crossbars and one vertical strap
- •8" x 2" urethane center wheels (part # 8057-114)
- •6" x 2" TPR square tread swivel casters (part # 8057-038)

Capacity 1,200 lb

- •Optional removable shelf (add -SH to model #)

 Capacity 200 lb
- •Optional center brake (add -CB to model #)

Retail Beverage Pre-Cool Cart Model # MAC-12

- •Keeps product cold in walk in coolers
- Save precious cooler space
- •Easily transports to point of sale coolers
- •Reduce customer complaints due to warm product
- •Eliminate stock rotation

24" Wide x 58.88" Overall Length x 61" Overall Height 8" x 2" TPR Center Wheels (p/n 8057-018) 6" x 2" TPR Swivel Casters (p/n 8057-038)

750 lb capacity - Shelf capacity 250 lb



- •Tilt design allows easy maneuvering in tight places Spins on it's own axis
- •Folds flat for compact storage, reducing shipping costs
- •Lightweight design is easily transported
- •Heavy duty understructure for maximum durability
- •Non marking wheels for in store use
- Modular construction for easy replacement of damaged components
- •Adjustable/removable shelf to accommodate a variety of products
- •Adjustable handle height





Steel Curbs



- Lightweight Aluminum Deck With Safety **Treadplate Surface**
- •Heavy Duty Bolt-On Steel Curbs for strength. Helps prevent run off. High visibility orange for safety.
- •Beveled Edges provide smooth entry and exit.
- •Engineered Bend keeps the edges of the dockboard flush with both dock and truck.
- •Heavy Duty Steel Bolt-On Legs can be reversed for refrigerated applications.

Industry Exclusive Two Year Warranty

SPE	SPECIFICATIONS			,000 LB CAPACI		15,000 LB CAPACITY 1/2" Aluminum, 4" High Steel Curbs			
Size (WxL)	Max Height Differ- ence	Leg Length	Cap. (Lbs)	Model #	Wt (Lbs)	Cap. (Lbs)	Model #	Wt (Lbs)	
60" x 36"	5"	7"	10,000	ADS10-6036	126	15,000	ADS15-6036	153	
60" x 48"	7"	9"	10,000	ADS10-6048	169	15,000	ADS15-6048	204	
60" x 60"	10"	12"	10,000	ADS10-6060	211	15,000	ADS15-6060	255	
60"x 72"	12"	18"	10,000	ADS10-6072	261	15,000	ADS15-6072	314	
72" x 36"	5"	7"	10,000	ADS10-7236	174	15,000	ADS15-7236	193	
72" x 48"	7"	9"	10,000	ADS10-7248	190	15,000	ADS15-7248	255	
72" x 60"	10"	12"	10,000	ADS10-7260	237	15,000	ADS15-7260	322	
78" x 36"	5"	7"				15,000	ADS15-7836	178	
78" x 48"	7"	9"				15,000	ADS15-7848	238	
78" x 60"	10"	12"				15,000	ADS15-7860	297	
78" x 72"	12"	18"				15,000	ADS15-7872	357	

"Quick Ship" available on all sizes

Accessories Lifting Chains

Heavy duty chains for forklift moving of dockboards


Quickly and easily attached onto the dockboard curb with heavy duty steel hooks

(Recommended for boards 10,000 lb capacity and up)

*See page 33 for replacement leg sizes and part numbers



32——— Aluminum Dockboard with ——— Welded Aluminum Curbs

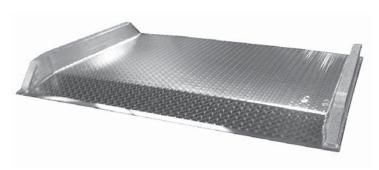

- •FULLY WELDED ALUMINUM CURBS FOR MAXIMUM STRENGTH AND DURABILITY
- •STEEL BOLT-ON LEGS
- •INDUSTRY EXCLUSIVE TWO YEAR WARRANTY
- **•QUICK-SHIP AVAILABILITY ON POPULAR SIZES**

SPE	CIFICATIO	NS	5/16" Alu	,000 LB CAP minum, 3" H ith * plate is 3	igh Curb		LB CAPAC	ACITY 12,000-15,000 LB CAPACITY 'High Curb 3/8'' Aluminum, 4'' High Curb			12,000-17,000 LB CAPACITY 1/2" Aluminum, 4" High Curb			
Size (W x L)	Max Height Difference	Leg Length	Cap. (Lbs)	Model #	Wt (Lbs)	Cap. (Lbs)	Model #	Wt (Lbs)	Cap. (Lbs.)	Model #	Wt (Lbs)	Cap. (Lbs)	Model #	Wt (Lbs)
48"x36"	5"	7"	7,000	L7-4836	80	10,000	L10-4836	97						
48"x48"	7"	9"	7,000	L7-4848	107	10,000	L10-4848	130						
48"x60"	10"	12"	7,000	L7-4860	133	10,000	L10-4860	162						
60"x36"	5"	7"	7,000	L7-6036	93	10,000	L10-6036	113	15,000	L15-6036	120	17,000	L17-6036	146
60"x48"	7"	9"	7,000	L7-6048	124	10,000	L10-6048	151	15,000	L15-6048	160	17,000	L17-6048	195
60"x60"	10"	12"	7,000	L7-6060*	155	10,000	L10-6060	188	15,000	L15-6060	200	17,000	L17-6060	244
60"x72"	12"	18"	5,000	L5-6072*	193				12,000	L12-6072	248	15,000	L15-6072	300
72"x36"	5"	7"	5,000	L5-7236	106				12,000	L12-7236	136	15,000	L15-7236	167
72"x48"	7"	9"	5,000	L5-7248	141				12,000	L12-7248	181	15,000	L15-7248	223
72"x60"	10"	12"	5,000	L5-7260*	177				12,000	L12-7260	226	15,000	L15-7260	279
72"x72"	12"	18"									·	12,000	L12-7272	342

Popular sizes in bold print available for "Quick Ship" upon request

Accessories

Handles

Add lift handles for easy movement (Only available on 5,000 and 7,000 capacity boards)

Lifting Chains

Heavy duty chains for forklift moving of dockboards

Quickly and easily attached onto the dockboard curb with heavy duty steel hooks

(Recommended for boards 10,000 lb capacity and up)



How to choose a Dockboard:

Step 1: Determine capacity - add the weight of the forklift and the weight of the maximum load to be carried


Step 2: Determine Width - The width of the dockboard should be at least 18 inches wider than your widest equipment passing over the board. Remember, safety curbs take up 6 inches of usable width. Example: A 60 inch dockboard has 54 inches of usable space.

Step 3: Determine Length - You need to know the maximum difference between the height of the dock and the height of the highest truck bed.

1. Max. Truck Height		
2. Minus Dock Height	-	
3. Equals Height Difference	=	

Using the chart below, determine the length of the board you need. An 11 degree bend is standard. Example: If the maximum height difference is 7 inches, a board at least 48 inches long is required.

·		MAXIMUM HEIGHT DIFFERENCE (INCHES)																
SLOPE ANGLE	1	2	3	4	5	5.5	6	7	8	8.5	9	10	11	12	13	14	15	16
11 DEG. STANDARD				30	36		42	48		54		60	66	72	78	84	90	96

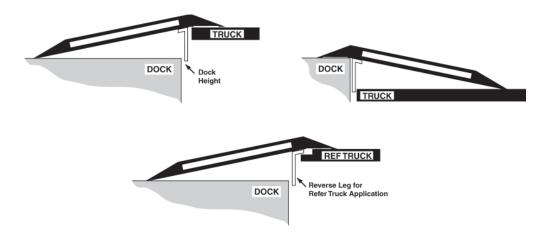


To Order Replacement Legs:

BOARD LENGTH	LEG LENGTH	TO ORDER 1 LEG (NO HARDWARE)	TO ORDER A PAIR OF LEGS (INCLUDES HARDWARE)
36 inches	7 inch	P/N 8062-001	P/N 3500-L7
48 inches	9 inch	P/N 8062-002	P/N 3500-L9
60 inches	12 inch	P/N 8062-003	P/N 3500-L12
72 inches	18 inch	P/N 8062-004	P/N 3500-L18



Best Selling Dockplates in America

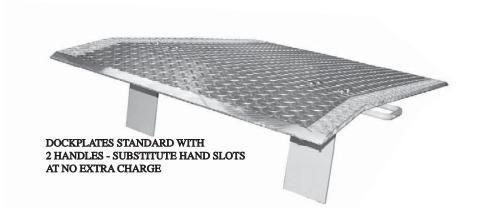

- •High-Traction, Safety Treadplate Surface gives positive traction for equipment and safe footing for personnel.
- •Bolt-On Legs/Handles allow for quick field repair and ease of moving/lifting - Easily reversed for refrigerated trucks.
- •Beveled Edges provide smooth entry and exit.
- •Engineered Bend keeps the edges of the dock plate flush with both dock and truck.
- •Safety Yellow Tape on edges for low light visibility

Two Year Warranty

How To Select The Correct Dockplate:


NON MOTORIZED USE ONLY!

Step 1: Determine Width - add 12" to the widest load that will go over the plate

Step 2: Determine Capacity - weight of pallet jack + maximum weight of items carried + operator weight

If the maximum load is within 50 pounds of the stated capacity, select the next highest capacity.

Step 3: Determine Length - required length is determined by height difference between dock and truck floor

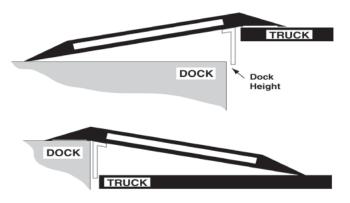

						MAXII	иим н	HEIGH	IT DIF	FERE	NCE I	N INC	HES					
SLOPE ANGLE	1	2	3	4	5	5.5	6	7	8	8.5	9	10	11	12	13	14	15	16
11 DEG. STANDARD				30	36		42	48		54		60	66	72	79	84	90	96

A Note About Capacities

All B&P dockplates are rated at actual capacities, per Aluminum Industry Association standards. Some other companies rate capacities with a formula that considers the fact that only two wheels of the four wheel vehicle will be on the plate at one time. This can artificially overstate the capacities of the plates, creating a potentially dangerous situation. We state our capacities as actual, giving you an extra margin of safety.



——— Aluminum Truck Dockplates —— 35

Dock	plates ar	e standa	ard wit	h 2 handl	es - Orde	er with l	hand slo	ts at no	additio	nal charg	ge
SPEC	CIFICATI	ONS		EL SERIE	ES	F	E SERIES	S	Е	EH SERIE	S
				5/16" Plat	te	3	3/8" Plate	:		1/2" Plate	;
Size	Max	Leg	Cap.		Weight	Cap.		Weight	Cap.		Weight
(w x l)	Ht. Diff (In)	Length	(Lbs)	Model #	(Lbs)	(Lbs)	Model #	(Lbs)	(Lbs)	Model #	(Lbs)
30x24	3	7	2196	EL-3024	42	3000	E-3024	46	5200	EH-3424	55
30x30	4	7	1757	EL-3030	47	2300	E-3030	53	4100	EH-3030	64
30x36	5	7	1464	EL-3036	53	1800	E-3036	60	3500	EH-3036	72
30x48	7	9	1098	EL-3048	68	1400	E-3048	76	2600	EH-3048	94
					ı						
36x24	3	7	2636	EL-3624	46	3600	E-3624	51	6200	EH-3624	62
36x30	4	7	2108	EL-3630	53	3000	E-3630	58	5100	EH-3630	72
36x36	5	7	1757	EL-3636	59	2500	E-3636	68	4300	EH-3636	82
36x48	7	9	1318	EL-3648	76	1900	E-3648	87	3000	EH-3648	108
42x24	3	7	3075	EL-4224	51	4300	E-4224	57	7200	EH-4224	68
42x30	4	7	2460	EL-4230	58	3300	E-4230	64	5900	EH-4230	81
42x48	7	9	1537	EL-4248	85	2100	E-4248	96	3500	EH-4248	123
			•		•					1	
48x24	3	7	3514	EL-4824	55	5200	E-4824	62	8200	EH-4824	75
48x30	4	7	2811	EL-4830	64	4100	E-4830	72	6300	EH-4830	90
48x36	5	7	2343	EL-4836	72	3500	E-4836	83	5300	EH-4836	104
48x42	6	9	2008	EL-4842	85	3000	E-4842	96	4300	EH-4842	122
48x48	7	9	1757	EL-4848	94	2600	E-4848	107	3800	EH-4848	137
48x60	10	12				1800	E-4860	132	2900	EH-4860	168
			•								
60x24	3	7	4393	EL-6024	64	5700	E-6024	71	10000	EH-6024	90
60x30	4	7	3514	EL-6030	75	4600	E-6030	85	7800	EH-6030	108
60x36	5	7	2928	EL-6036	85	4100	E-6036	98	6600	EH-6036	125
60x42	6	9	2510	EL-6042	100	3500	E-6042	115	5500	EH-6042	148
60x48	7	9	2196	EL-6048	111	2900	E-6048	129	4800	EH-6048	164
60x60	10	12				2000	E-6060	160	3700	EH-6060	203
			1015	I == ====	0.5	7 400	I = ====		0.500	I	
72x30	4	7	4217	EL-7230	85	5400	E-7230	98	9500	EH-7230	125
72x36	5	7	3514	EL-7236	99	4300	E-7236	118	7800	EH-7236	145

E-7248 *Popular sizes in bold print available for "Quick Ship" upon request

3400

TO ORDER REPLACEMENT LEGS:

2636

EL-7248

Leg & Handle Assy (pair w/hardware)

7" Legs Part #3500-L7H2 9" Legs Part #3500-L9H2 12" Legs Part #3500-L12H2

72x48

1 Leg w/Handle (does not include hardware)

7" Leg w/Handle LH Part #8220-001

7" Leg w/Handle RH Part #8220-002

9" Leg w/Handle LH Part #8220-003

9" Leg w/Handle RH Part #8220-004

12" Leg w/Handle LH Part #8220-005

12" Leg w/Handle RH Part #8220-006

For Plates with Hand Slots (pair of Legs w/hardware)

151

5900

EH-7248

7" Legs Part #3500-L7

9" Legs Part #3500-L9

12" Legs Part #3500-L12

1 Leg Only - No Handle (does not include hardware)

7" Leg Only/No Handle Part #8062-001

9" Leg Only/No Handle Part #8062-002

12" Leg Only/No Handle Part #8062-003

Leg Hardware Kit P/N 3500-H1 - includes 8 carriage bolts and 8 nylock lock nuts



AVAILABLE IN FORMED DECK OR WELDED DECK DESIGN

BOTH FEATURING A TWO YEAR WARRANTY!

EXCLUSIVE FORMED DECK DESIGN





HEAVY DUTY WELDED DECK DESIGN

Industry exclusive side rails actually lock the deck in to provide strength and resistance to twisting and deck curling. The side rail also allows field installation of the protective bumper and deck carpeting. These features, combined with our standard setting heavy duty understructure, make this the best platform truck on the market, hands down.



& D Manufact

Aluminum Platform Trucks ———

FORMED DECK WITH ONE #150 OPEN HANDLE

DECK SIZE	TREAD PLATE DECK	SMOOTH PLATE DECK
W" X L"	MODEL#	MODEL#
24 x 36	PTF-2436T-150	PTF-2436S-150
24 x 48	PTF-2448T-150	PTF-2448S-150
30 x 48	PTF-3048T-150	PTF-3048S-150
30 x 60	PTF-3060T-150	PTF-3060S-150
30 x 72	PTF-3072T-150	PTF-3072S-150
36 x 48	PTF-3648T-150	PTF-3648S-150

WELDED DECK WITH ONE #150 OPEN HANDLE

DECK SIZE	TREAD PLATE DECK	SMOOTH PLATE DECK
W" X L"	MODEL#	MODEL#
24 x 36	PT-2436T-150	PT-2436S-150
24 x 48	PT-2448T-150	PT-2448S-150
24 x 60	PT-2460T-150	PT-2460S-150
30 x 48	PT-3048T-150	PT-3048S-150
30 x 60	PT-3060T-150	PT-3060S-150
30 x 72	PT-3072T-150	PT-3072S-150
36 x 48	PT-3648T-150	PT3648S-150
36 x 60	PT-3660T-150	PT-3660S-150
36 x 72	PT-3672T-150	PT-3672S-150

OPTIONAL HANDLES



#155 Handle One Strap



#160 Handle Two Straps



#165 Handle 18" Panel

CASTER OPTIONS (2 RIGID, 2 SWIVEL)

TPR Non-Marking Casters The Best High Performance Caster Available

Easier, more responsive starts and rolling than mold on rubber

Resists and rejects metal shavings, chips and other debris

Impact resistant with maximum shock absorption



Caster Kit 650 6"x 2", Poly Core, Round TPR Tread (provides 1,500 lb cap.) add -650 to model #

Caster Kit 850 8"x2", Poly Core Round TPR Tread (provides 2,000 lb cap.) add -850 to model #



Caster Kit 820 8" Cast Iron Core Mold on Rubber Square Tread (provides 2,500 lb cap.) add -820 to model #

Welded Deck Design Available with Full Perimeter Bumper

For Black add -300 to model #
For non-marking Gray add -310 to model #
And

Carpeted Deck, add -C to model # *bumper required with carpeted deck

Optional Floor Locks

For use with 6" casters add -060 to model # For use with 8" casters add -080 to model #





City Van Ramps—

NEW DESIGN

Lighter Weight! **Improved Traction! Built in Handles!**

- •Save Time and Money
- •Reduce Risks of Injury and Fatigue
- •Speeds Loading/Unloading
- •Transports easily in your delivery vehicle
- •Ideal for city deliveries where space is limited
- •Widths and lengths to suit any application


					SPECIFIC	CATIONS	5			
Type	Height I Min	Range (In) Max	Length (Ft)	Cap. Lbs.	26" W Model #	idth Wt (Lbs)	28" W Model #	idth Wt (Lbs)	38" W Model #	idth Wt (Lbs)
	6	21	6	2000	-	-	PR-2806-A	48	PR-3806-A	61
	6	25	7	1800	-	-	PR-2807-A	56	PR-3807-A	70
	6	29	8	1700	-	-	PR-2808-A	63	PR-3808-A	79
A	6	33	9	1650	-	-	PR-2809-A	70	PR-3809-A	88
	6	38	10	1500	-	-	PR-2810-A	77	PR-3810-A	97
	6	46	12	1400	-	-	PR-2812-A	92	PR-3812-A	115
	6	54	14	1200	-	-	PR-2814-A	107	PR-3814-A	133
	6	62	16	1000	-	-	PR-2816-A	121	PR-3816-A	151
	6	23	6	2000	PR-2606-F	47	PR-2806-F	49	PR-3806-F	62
	6	27	7	1800	PR-2607-F	54	PR-2807-F	57	PR-3807-F	71
	6	31	8	1700	PR-2608-F	61	PR-2808-F	64	PR-3808-F	80
F	6	35	9	1650	PR-2609-F	68	PR-2809-F	71	PR-3809-F	89
	6	40	10	1500	PR-2610-F	75	PR-2810-F	79	PR-3810-F	98
	6	48	12	1400	PR-2612-F	89	PR-2812-F	93	PR-3812-F	116
	6	56	14	1200	PR-2614-F	103	PR-2814-F	108	PR-3814-F	134
	6	64	16	1000	PR-2616-F	117	PR-2816-F	122	PR-3816-F	152

•Two Year Warranty!

To suit your needs better, two types of ramps are available:







OPTIONAL UNDER TRUCK CARRIERS

Available for Type F Hook End ONLY


C designates carrier, then width, length and open or

closed.	ob currior, tr	ion widin, longin	and open of		5 - 1/2" ¬ Carrier
Ramp	Ramp	Open Carrier	Closed Carrier		Height
Width	Length	P/N	P/N	16' I.D. Dim = 15' - 9 1/2"	
26"	14'	C2614O	C2614C	16 1.D. Dill = 13 - 9 1/2 14' I.D. Dim = 13 '- 9 1/2"	
26"	16'	C2616O	C2614C		
		27" Car Width	rier	16' O.D. Dim = 17' - 1/2" 14' O.D. Dim = 16' - 2 1/2"	

Other sizes available on a special order basis and will be non-returnable. Consult factory for pricing.





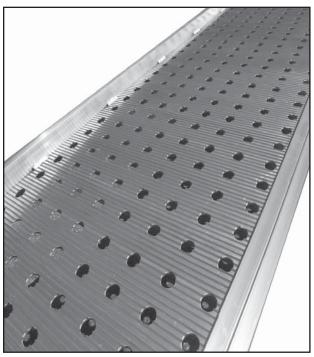

NEW PUNCHED DESIGN

- •Holes are punched in the material, provides superior traction
- •Won't collect ice, mud, snow, or debris
- •Punched design reduces the weight without sacrificing strength
- •Custom widths available
- •Steel hooks lock onto truck bed for flush-type direct entry

				SPE	CIFICATION	NS			
Heig	tht Range	Lonoth	Com	26" Wi	idth	28" W	idth	38" Width	
Min	(In) Max	Length (Ft)	Cap. (Lbs)	Model #	Wt. (Lbs)	Model #	Wt. (Lbs)	Model#	Wt. (Lbs)
6	23	6	2000	PRP-2606-F	44	PRP-2806-F	45	PRP-3806-F	58
6	27	7	1800	PRP-2607-F	51	PRP-2807-F	53	PRP-3807-F	67
6	31	8	1700	PRP-2608-F	57	PRP-2808-F	60	PRP-3808-F	75
6	35	9	1650	PRP-2609-F	64	PRP-2809-F	67	PRP-3809-F	83
6	40	10	1500	PRP-2610-F	70	PRP-2810-F	74	PRP-3810-F	92
6	48	12	1400	PRP-2612-F	84	PRP-2812-F	88	PRP-3812-F	108
6	56	14	1200	PRP-2614-F	97	PRP-2814-F	101	PRP-3814-F	125
6	64	16	1000	PRP-2616-F	111	PRP-2816-F	115	PRP-3816-F	142

Speeds Loading/Unloading and Material Movement in Warehouse or at Production Lines



Model #4248-6T





Optional Handle

Model #2424-6T



Size W x L	· /	Capacity oller		Capacity oller	8,000 Lb Capacity 10 Roller		
Length is Travel Direction	Model #	Wt (Lbs)	Model #	Wt (Lbs)	Model #	Wt (Lbs)	
36" x 36"	3636-6T	32	3636-8T	37	3636-10T	40	
36" x 42"	3642-6T	34	3642-8T	40	3642-10T	43	
36" x 48"	3648-6T	36	3648-8T	41	3648-10T	44	
40" x 48"	4048-6T	36	4048-8T	42	4048-10T	45	
42" x 42"	4242-6T	37	4242-8T	43	4242-10T	46	
42" x 48"	4248-6T	37	4248-8T	43	4248-10T	46	
48" x 48"	4848-6T	38	4848-8T	44	4848-10T	47	
24" x 24"	2424-6T	34					

Tilt Type Dollies ROLLER CONFIGURATION 4000 lb. cap. - 6 Roller 6000 lb. cap. — 8 Roller 8000 lb. cap. - 10 Roller

Light - Average weight only 40 lbs. Make possible return of number of dollies to leading point manually. **Rugged** - Strong extruded aluminum

Maneuverable - Tilt Construction with 360 degree turning. Non-tilt also available. **Rollers** - 3.5" rollers with sealed bearings. All Popular Sizes - From 36"x36" to 48"x48".

Capacities - 4,000 to 8,000 pounds.

Economic Benefits - Frees fork lift trucks from short hauls. Greater worker safety and reduced

frame and steel axles.

labor time.

Deck option available - consult factory

Non Tilt Type

If a non-tilt type of Pallet Dolly is desired, delete the "T" and add "NT" to the model number when ordering - No extra charge for the non-tilt type dollies



Two handle loops and one handle are available as opional equipment - push or pull either end Add -H to model # Example: 4848-6T-H

To order center support crossbar as an option

Add -CB to model # Example: 3636-6T-CB



— Aluminum Wheel Ramps ——— 41

To Select Your Ramp:

Ramp selection is based on the following three items:


A Width - Based on the maximum wheel width of your largest vehicle.


For double wheel vehicles, choose the 24" width and use the ramp at the inside wheel location.

B Height - Determined by the following formula: Dock Height + 2" =


minus Truck Bed Height = _ Choose the next highest standard height in chart.

C Length - The longer the ramp, the less incline angle. Choose a length with an incline angle that your loaded vehicles can negotiate easily.





	C	APACITY F	OR ALL M	ODELS = 12,000	LBS PER	RAMP		
В	С	D	E	A		A		
Height		Length (In)		18" W	ide	24" Wide		
(In)	Overall	Level	Incline	Model #	Wt (Lbs)	Model #	Wt (Lbs)	
6	48	30	18	PR-18-6-48	64	PR-24-6-48	79	
	60	42	18	PR-18-6-60	77	PR-24-6-60	94	
	102	84	18	PR-18-6-102	126	PR-24-6-102	145	
8	54	30	24	PR-18-8-54	78	PR-24-8-54	94	
	60	36	24	PR-18-8-60	85	PR-24-8-60	103	
	108	84	24	PR-18-8-108	147	PR-24-8-108	169	
10	60	30	30	PR-18-10-60	95	PR-24-10-60	115	
	66	36	30	PR-18-10-66	102	PR-24-10-66	124	
	72	42	30	PR-18-10-72	111	PR-24-10-72	133	
	114	84	30	PR-18-10-114	166	PR-24-10-114	188	
12	72	36	36	PR-18-12-72	125	PR-24-12-72	143	
	78	42	36	PR-18-12-78	137	PR-24-12-78	153	
	120	84	36	PR-18-12-120	188	PR-24-12-120	213	




Wheel Chocks ——

RUBBER

MODEL #RWC-1

Rubber Construction Ribbed Tire Face Extra Strong, Lightweight 9 lbs. each 9.5"W x 8"H x 6"D





ALUMINUM MODEL #AWC-888

Extruded Aluminum Ribbed Tire Face Extra Strong, Lightweight 7 lbs. each 8"W x 7.5"H x 7.5"D

